LIGHTING

ADES

ADES

Lighting Innovation

www.ades-lighting.com

ADES

Catalogue

COMPANY INTRODUCTION

TABLE OF CONTENTS

PRODUCTS



About Us

Founded in 2018, ADES Lighting is a leading company in the field of lighting design and providing lighting solutions for commercial, industrial, and residential projects. With extensive experience and dedication to our profession, we take pride in being a trusted partner for many clients in creating comprehensive lighting spaces.

At ADES Lighting, we believe that light is not only a source of illumination but also essential element in creating effective living and working environments. With a deep understanding of light and creative abilities, we offer customized lighting solutions that are tailored to specific project.

The team of experts at ADES consists of architects, lighting engineers, and talented designers who possess in-depth knowledge of lighting technology and design trends. We employ advanced design methods and utilize the latest technologies to create diverse and efficient lighting solutions. We always listen and understand our clients' desires in order to create outstanding living and working spaces that reflect the individuality and essence of each project.

In additional to lighting design, ADES also provides a range of high-quality lighting fixtures from leading manufacturers worldwide. We distribute led lights, decorative lights, smart lighting systems, and various other lighting devices to deliver the most comprehensive lighting solutions.

With a mission to design human-centric lighting, ADES Lighting is committed to delivering optimal lighting solutions that blend artistry and technology, innovative and captivating spaces. Let's work together to create memorable moments of light.



Lighting design consultants

- *Professional*
- *Creative*
- *Effective*

ADES

- A professional lighting design plan is able to accurately calculate the amount of light required without compromising on functionality or wasting energy and money.

- ADES offers lighting design services with the mission Human Centric Lighting.

- ADES's team of design experts clearly understands the needs and standards required for each project. The customer's requirements, preferences or personality will be fully synthesized in a detai led design that will help them improve and upgrade their living space effectively through lighting.

- Let's work together to create memorable moments of light.



Visual Effects

Visual Perception
Lighting is essential for visual perception.Adequate lighting enables us to see and interpret our surroundings accurately.

Visual Comfort
Proper lighting levels and distribution contribute to visual comfort.

Color Perception
Lighting can highlight architectural features, create ambiance and enhance the aesthetics of spaces.

Safety
Adequate lighting is crucial for maintaining safe environments.

Architectural Aesthetic Impact
Lighting can highlight architectural features, create ambiance and enhance the aesthetics of spaces.

Non-Visual Effects

Mood and Emotions
Lighting influences our mood and emotions. Bright, natural light can boost energy and positivity, while dimmer, warmer lighting can create a cozy and relaxed atmosphere.

Productivity Concentration
Proper lighting is essential for maintaining focus andproductivity.


Circadian Rhythms
Light plays a significant role in regulating our circadian rhythm the natural biological processes that control our sleep-wake cycle.

Health
Insufficient or poor-quality lighting can lead to eyestrain, headaches, and other health issues. Proper lighting can help reduce these negative effects.

LIGHTING


is controlling our life

Designed by BISCONS

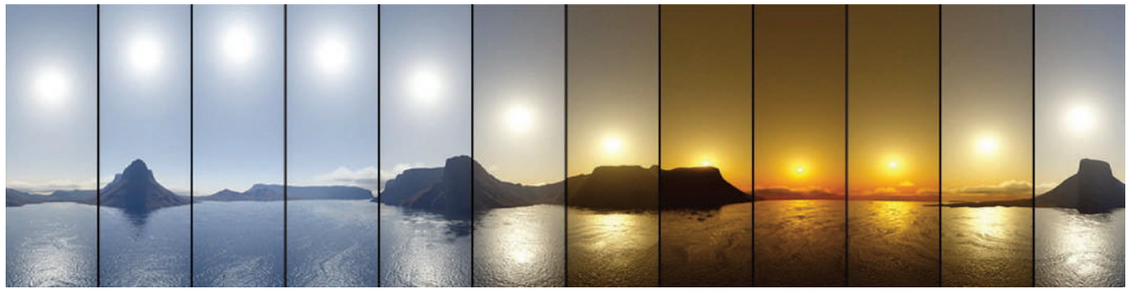


SCIENTIFIC DATA

Under the same light conditions compared
with traditional lighting, rhythmic lighting
can reduce the level of Melatonin by 18%
and improve the concentration by 3%
it can Increase Melatonin level by 5% at night
and make people entter deep sleep 52 minutes in advance

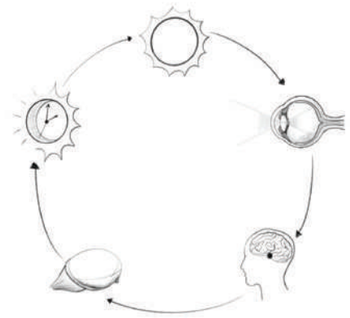

The above content is taken from Korea National University

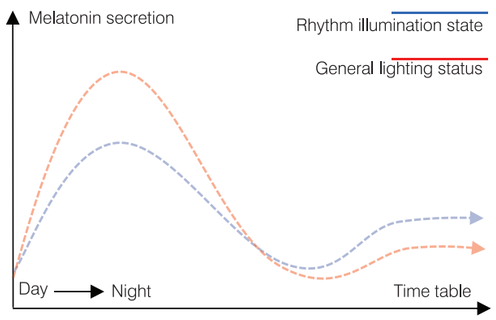

Clinical trial data of rhythm lighting medicine

Test site	Korea National University
Research object	30 people aged 20~50
Test cycle	3 days and 2 night per person
Test form	Saliva, heart rate, egg, questionnaire, d2 test

2002
A third type of photoreceptor in thte retina, the retinal
ganglion photoreceptor, was found photobiological effect
has been completely explained and developed
with the study of non visual biological effect of light
people have found that the impact of light on
human beings is not just to let people see the world at the time
it also affects human physiological rhythym

Light is closely related to health easy digital
control based on led. It can be precisely adjusted
according to the needs of human body for health
lighting so as to achieve the controllable characteristics
of the main factors of non visual biological effects
of around the application of led lighting technology design
scheme of intelligent health lighting system.

INDOOR

Recessed Ceiling


A7108R 01
ACE


A6508S 03
ACE


A1383510L 05
ACE


A6610S 07
ACE


A13910S 09
ACE


B8010D 13
BALDER


B7512D 14
BELLIS


C8510M 15
CARINA


C7512D 19
CHARON


C5613DZ 23
CRYSTAL PRO


C6518DF 23
CRYSTAL PRO


C5613DTZ 24
CRYSTAL PRO


C6518DTF 24
CRYSTAL PRO


C6513PTZ 25
CRYSTAL PRO



C6518PTF 25
CRYSTAL PRO


C6513PDZ 26
CRYSTAL PRO


C6518PDF 26
CRYSTAL PRO


C6513PSZ 27
CRYSTAL PRO


C6518PSF 27
CRYSTAL PRO


C6513LZ 28
CRYSTAL PRO


D8508-A/ D8508-T 31
DROP


D16020-B 32
DROP


EB4510C-F/ EB5010C-A 33
ELBOW


EB4510TC-F/ EB5510TC-A 34
ELBOW


EB4510O-F/ EB5010C-A 35
ELBOW


EB4510TO-F/ EB5510TO-A 36
ELBOW


EB4510B-F/ EB5010B-A 37
ELBOW


EB4510TB-F/ EB5510TB-A 38
ELBOW


EB4510R-F/ EB5010R-A 39
ELBOW


EB4510TR-F/ EB5510TR-A 40
ELBOW


E7507C 45
EROS


E7507S 47
EROS


E7507O 49
EROS


E7512E 51
EROS


E7510W 53
EROS


E7510SW 55
EROS


E7507TC 61
EROS


E7507TS 63
EROS


E7507TO 65
EROS


E7512TE 66
EROS

E7510TW 67
EROS

E7510TSW 68
EROS

F3503D 69
F4507D
FIONA

F5503EL 71
FORCUS

F7010Z 75
FORCUS PRO

H7507C 77
HELIOS

H7520R 79
HELIOS

L1010S 81
LYRA

Recessed Ceiling

M7512A 83
MARS

M7508E 85
MARS

M7512O 87
MARS

M7512TA 89
MARS

M7508TE 91
MARS

M7512TO 92
MARS

M7510-IP65 93
MARINA

M5008R 95
MIJU

M4505Z 97
M4510Z
MAYA

M4505TZ 99
M4510TZ
MAYA

OC3507Z 99
ODIN

S4505Z 99
SELINA

S4505T 100
SELINA

S7508C 101
STELLA

T4003A 103
TINY

Y7510C 105
YODA

Y1235C 106
YODA

Y7510TC 107
YODA

Y1235TC 108
YODA

Y7510S 109
YODA

Y1235S 110
YODA

Y1235TS 111
YODA

Y7510TS 112
YODA

Z4506A/ Z4509A 115
ZENITH

Z4506T/ Z4509T 115
ZENITH

Surface

C4510ZA 119
CARMAN

C4508ZS 121
CARMAN

C4510Z 123
CARMAN

L5210S 125
LUNA

D7610W 129
DECO

D9515-IP65 131
DECO

D6405A 132
DECO

Step Light

B3801S 133
STEP LIGHT

SR4501 135
STEP LIGHT

ST8001 137
STEP LIGHT

B9001S 139
STEP LIGHT

S9003-65A 141
STEP LIGHT

S9003-65B 141
STEP LIGHT

S11703R 143
STEP LIGHT

S11803C 143
STEP LIGHT

S10506-65 145
STEP LIGHT

S18503-65 147
STEP LIGHT

S20003-20 149
STEP LIGHT

S11003-20 149
STEP LIGHT

S7501-03RL 151
STEP LIGHT

S7001-03RL 153
STEP LIGHT

Aluminum LED Profile



AB5035T - L2000 157
ALUMINUM BENDING



AB5035T - R300 157
ALUMINUM BENDING


AB5035U - L2000 157
ALUMINUM BENDING


ABB5035U - R300 157
ALUMINUM BENDIN


AB5035U - L2000 157
ALUMINUM BENDING


TN1201 159
ALUMINUM


TN0709 160
ALUMINUM



ATG3010 161
ALUMINUM


AT5010 162
ALUMINUM



AT5213 163
ALUMINUM


AT6114 164
ALUMINUM


TN6013 165
ALUMINUM


AT7020 166
ALUMINUM



AT8020 167
ALUMINUM



AT9602 168
ALUMINUM


HG6850 169
ALUMINUM


HG7158 170
ALUMINUM


HG5870 171
ALUMINUM


HG7190 172
ALUMINUM


HG7187 173
ALUMINUM


HG5538 174
ALUMINUM


HG7563 175
ALUMINUM


HG9758 176
ALUMINUM

Art Track Light


T6510A-4525 181
ART TRACK LIGHT


T7520A-7525 182
ART TRACK LIGHT


T830A-7525 183
ART TRACK LIGHT


T9540A-7525 184
ART TRACK LIGHT


T6510B-3635 185
ART TRACK LIGHT


T7520B-6525 187
ART TRACK LIGHT


T8530B-6025 189
ART TRACK LIGHT


T9540B-6025 190
ART TRACK LIGHT


T7520C-4840 193
ART TRACK LIGHT


T8530C-5840 195
ART TRACK LIGHT


T9540C-5840 196
ART TRACK LIGHT


D7008B-3635 197
ART TRACK LIGHT


C1070K-3836B 198
ART TRACK LIGHT


C1070K-3855 198
ART TRACK LIGHT


D1075K-3836B 201
ART TRACK LIGHT


D1075K-3855 202
ART TRACK LIGHT


T1003K-3836B 203
ART TRACK LIGHT

T1003K-3855 204
ART TRACK LIGHT

Display Light

MN2503 205
MINI

DWY5503 207
RECESSED CEILING

DGWY5501 209
RECESSED CEILING

DGCWY4501 210
CABINET

SWY3402MK 211
SURFACE

DWY3402MK 212
CABINET

Display Light

GWYD4205 213
GRUS

GWYD5007 214
GRUS

TWYD702 215
TRACK LIGHT

SWY0501 216
SURFACE

SWYD 217
SURFACE

GPWY018 218
CABINET

PWY092 219
PORTABLE CHARGE

PCWY275 220
PORTABLE CHARGE

GCWY045 221
FLOOR MOUNTED

GSWY045 222
FLOOR MOUNTED

FNWY330 223
FLOOR MOUNTED

FMWY0049 224
FLOOR MOUNTED

LWY520 225
LINEAR

Magnetic Track

SS1000 231
SURFACE MOUNT TRACK

SR1000 231
RECESSED TRACK

SP1000 231
SUSPENE TRACK

SA1000 249
RECESSED TRACK

SC1000 249
SURFACE MOUNT TRACK

Magnetic Track Light

AMS4810 233
MAGNETIC SLIM

AMGS22012 235
MAGNETIC SLIM

AMLS24012 237
MAGNETIC SLIM

AMLL30010 239
MAGNETIC SLIM

AMS3507G 241
MAGNETIC SLIM

AMS4507Z 243
MAGNETIC SLIM

AMS5515Z 245
MAGNETIC SLIM

AMW10220 247
MAGNETIC SLIM

UMNL40210 251
MAGNETIC ULTRA THIN

UMLS34712 252
MAGNETIC ULTRA THIN

Track Light

AP20430-6T 253
A-PRO

AP14936-9T 253
A-PRO

AP11016-4T 253
A-PRO

AP40560-12T 253
A-PRO

E4510T 257
ERIS

T5 LED Tube

AD-T5-3003 259
AD-T5-6003
AD-T5-9010
AD-T5-12012
TUBE T5


LED Wall Washer + Neon Strip



WWL1809-09 261
LED WALL WASHER


WWS2924-12 263
LED WALL WASHER


NTS1010-2410 265
NEON STRIP


NS1010-10 267
NEON STRIP


NT1010-10 268
NEON STRIP



NS1017-10 269
NEON STRIP


NS1223-10 270
NEON STRIP


ND1625-10 271
NEON STRIP


NS1516-10 272
NEON STRIP


NS2020-10 273
NEON STRIP


NS1720-2410 274
NEON STRIP



NS1819-2410 275
NEON STRIP


D16-10 277
NEON STRIP


D25-10 279
NEON STRIP



D30-10 280
NEON STRIP

LED Strip


CLS42010 281
LED STRIP


SLS12012 283
LED STRIP


CL07-68 285
SILICON STRIP


CL07-20 287
LED STRIP

Decorate


MOON 289



UFO 291


DECORATE 293


DECORATE 295



DECORATE 309



DECORATE 325


DECORATE 337


DECORATE 353


DECORATE 365


DECORATE 377


DECORATE 395


DECORATE 407


DECORATE 419

OUTDOOR

Flood Light


FL65-1.5SL 441
FLOOD LIGHT


FL7003-3SL 443
FLOOD LIGHT


FL9512-6SL 444
FLOOD LIGHT


FL9012-05RL 445
FLOOD LIGHT


FL9010-01RL 446
FLOOD LIGHT


FL14018-12RL 447
FLOOD LIGHT


FL19024-09RL 448
FLOOD LIGHT


FL22048-30RL 450
FLOOD LIGHT

FL22048-30RL 451
FLOOD LIGHT

FL26060-24RL 452
FLOOD LIGHT

FL35090-36RL 453
FLOOD LIGHT

FL13012-03AL 454
FLOOD LIGHT

FL17024-06AL 456
FLOOD LIGHT

FL21048-12AL 457
FLOOD LIGHT

FL26072-18AL 461
FLOOD LIGHT

FL15010-1SL 463
FLOOD LIGHT

FL18022-6SL 465
FLOOD LIGHT

FL210-30SL 467
FLOOD LIGHT

FL30340-16SL 469
FLOOD LIGHT

FL328120-25SL 471
FLOOD LIGHT

FL360-120SL 473
FLOOD LIGHT

FL360-240SL 473
FLOOD LIGHT

FL435-190SL 474
FLOOD LIGHT

FL435-360SL 474
FLOOD LIGHT

FL8506-3LD 475
FLOOD LIGHT

FL12520-9LD 476
FLOOD LIGHT

FL16030-18LD 477
FLOOD LIGHT

FL18060-36LD 477
FLOOD LIGHT

FL8506-3ULD 479
FLOOD LIGHT

FL12520-9ULD 480
FLOOD LIGHT

FL16030-18ULD 481
FLOOD LIGHT

FL18060-36ULD 482
FLOOD LIGHT

FL265-48LD 483
FLOOD LIGHT

FL200-80SL 485
FLOOD LIGHT

FL145-40SL 487
FLOOD LIGHT

FL240-180SL 488
FLOOD LIGHT

FL952-400SL 489
FLOOD LIGHT

FL900-360SL 490
FLOOD LIGHT

FL18915-06LT 491
FLOOD LIGHT

FL33930-12LT 491
FLOOD LIGHT

FL48945-18LT 491
FLOOD LIGHT

FL63964-24LT 492
FLOOD LIGHT

FL78975-30LT 492
FLOOD LIGHT

FL93890-36LT 492
FLOOD LIGHT

FL21236-12LT 493
FLOOD LIGHT

FL29472-18LT 493
FLOOD LIGHT

FL37696-24LT 494
FLOOD LIGHT

FL540144-36LT 494
FLOOD LIGHT


Flood Light


FL663180-45LT 494
FLOOD LIGHT


FL4030-03RL 495
FLOOD LIGHT


FL4054-03RL 496
FLOOD LIGHT


FL5966-08RL 499
FLOOD LIGHT


FL10003-12RL 501
FLOOD LIGHT


FL7008-4LD 503
FLOOD LIGHT


FL11018-9LD 504
FLOOD LIGHT


FL13530-16LD 505
FLOOD LIGHT


FL16050-25LD 506
FLOOD LIGHT


FL540-288LT 507
FLOOD LIGHT


FL663-540LT 508
FLOOD LIGHT


FL20024-24LD 509
FLOOD LIGHT


FL27036-36LD 511
FLOOD LIGHT


FL31054-54LD 512
FLOOD LIGHT

Underwater Light


UW38-1.5LT 515
UNDERWATER LIGHT


UW55-02SL 515
UNDERWATER LIGHT


UW69-02SLT 516
UNDERWATER LIGHT


UW69-02ALT 516
UNDERWATER LIGHT


UW45-01PL 517
UNDERWATER LIGHT


UW180-10SL 518
UNDERWATER LIGHT


UW145-12SL 518
UNDERWATER LIGHT


UW98-02LT 519
UNDERWATER LIGHT


UW118-06LT 520
UNDERWATER LIGHT


UW135-08LT 521
UNDERWATER LIGHT


UW180-12LT 522
UNDERWATER LIGHT


UW205-24LT 523
UNDERWATER LIGHT


UW250-36LT 524
UNDERWATER LIGHT


UW149-12LT 525
UNDERWATER LIGHT


UW170-15LT 525
UNDERWATER LIGHT


UW182A-24LT 526
UNDERWATER LIGHT



UW200A-24LT 526
UNDERWATER LIGHT


UW160-18LT 527
UNDERWATER LIGHT



UW115-12LT 528
UNDERWATER LIGHT


UW115-06SL 529
UNDERWATER LIGHT


UW140-10SL 529
UNDERWATER LIGHT


UW153-12LT 531
UNDERWATER LIGHT


UW153-18LT 532
UNDERWATER LIGHT


UW180-24LT 533
UNDERWATER LIGHT


UW220-42LT 534
UNDERWATER LIGHT


UW113A-06LT 535
UNDERWATER LIGHT

UW113B-06LT 536
UNDERWATER LIGHT

UW190-18LD 537
UNDERWATER LIGHT

UW230-36LD 538
UNDERWATER LIGHT

UW224-42LT 539
UNDERWATER LIGHT

UW328-12LT 540
UNDERWATER LIGHT

UW195-06LT 541
UNDERWATER LIGHT

UW328-12LT 542
UNDERWATER LIGHT

UW250-12LT 543
UNDERWATER LIGHT

UW135-08LT 544
UNDERWATER LIGHT

UW42-03LT 545
UNDERWATER LIGHT

Underwater Light

UW65-06LT 546
UNDERWATER LIGHT

UW70-06LT 547
UNDERWATER LIGHT

UW95-12LT 548
UNDERWATER LIGHT

UW60-02LT 549
UNDERWATER LIGHT

UW61-02LT 550
UNDERWATER LIGHT

Inground Light

IG5501 553
INGROUND LIGHT

IG5503 553
INGROUND LIGHT

IG10-0.2LT 554
INGROUND LIGHT

IG20-0.6LT 554
INGROUND LIGHT

IG95-03LT 555
INGROUND LIGHT

IG139-06LT 556
INGROUND LIGHT

IG160-12LT 557
INGROUND LIGHT

IG180-18LT 558
INGROUND LIGHT

IG210-24LT 559
INGROUND LIGHT

IG250-36LT 560
INGROUND LIGHT

IG280-30SL 561
INGROUND LIGHT

IG155-10WRL 563
INGROUND LIGHT

IG200-20WRL 565
INGROUND LIGHT

IG260-30WRL 566
INGROUND LIGHT

IG200-18RL 567
INGROUND LIGHT

IG250-30RL 569
INGROUND LIGHT

IG320-48SL 570
INGROUND LIGHT

IG55-02AL 573
INGROUND LIGHT

IG70-01AL 574
INGROUND LIGHT

IG116-02AL 575
INGROUND LIGHT

IG173-05AL 576
INGROUND LIGHT

IG116-01AL 577
INGROUND LIGHT

IG328-12AL 578
INGROUND LIGHT

IG44-02AL 579
INGROUND LIGHT

IG120-01AL 580
INGROUND LIGHT

IG98-18RL 581
INGROUND LIGHT

IG90-36RL 582
INGROUND LIGHT

IG30-10RL 583
INGROUND LIGHT

IG50-18RL 584
INGROUND LIGHT

IG67-18LD 585
INGROUND LIGHT

IG43-18LD 586
INGROUND LIGHT

IG90-36LD 587
INGROUND LIGHT

Linear Light

LN24-12RL 591
LINEAR LIGHT

LN33-18RL 592
LINEAR LIGHT

LN38-24RL 593
LINEAR LIGHT

LN65-48RL 594
LINEAR LIGHT

LN22-12RL 595
LINEAR LIGHT

LN30-24RL 596
LINEAR LIGHT

LN42-36RL 597
LINEAR LIGHT

LN56-60RL 598
LINEAR LIGHT

LN66-60RL 599
LINEAR LIGHT

LN90-120RL 600
LINEAR LIGHT

LN100-120RL 601
LINEAR LIGHT

LN15-48RL 602
LINEAR LIGHT

Linear Light


LN23-15RL 603
LINEAR LIGHT


LN25-12RL 604
LINEAR LIGHT


LN22-12LD 605
LINEAR LIGHT


LN32-12LD 607
LINEAR LIGHT


LN26-12LD 608
LINEAR LIGHT


LN34-18LD 609
LINEAR LIGHT


LN39-24LD 610
LINEAR LIGHT


LN75-48LD 611
LINEAR LIGHT


LN23-19LT 613
LINEAR LIGHT


LN38-11LT 614
LINEAR LIGHT

Garden Light


GD110-15LD 615
GARDEN LIGHT


GD85-10LD 617
GARDEN LIGHT


GD170-50LD 618
GARDEN LIGHT


RF5010 619
GARDEN LIGHT


GD2603 621
GARDEN LIGHT


GD5003 621
GARDEN LIGHT


GD147-45SL 622
GARDEN LIGHT


GD5406-01AL 625
GARDEN LIGHT


GD7210-01AL 627
GARDEN LIGHT


GD10024-06AL 629
GARDEN LIGHT


GD15042-06AL 631
GARDEN LIGHT

Bollard


R12001 633
SALADIN


R120360 635
SALADIN


R12002 637
SALADIN


R10212-A 639
SALADIN


R10212-B 639
SALADIN


R10212-C 639
SALADIN


R18524-A 640
SALADIN


R18524-B 640
SALADIN


M12013-A 641
MUSHROOM


M12013-B 641
MUSHROOM

Wall Light


W3001A 643
WALL LIGHT


W3002B 644
WALL LIGHT


FW17510-02 645
WALL LIGHT


RW13506-02 645
WALL LIGHT


AW6509A 647
WALL LIGHT


AW6018B 649
WALL LIGHT


AW120-05AL 651
WALL LIGHT


AW160-08AL 653
WALL LIGHT

Window Light


WD280-36SL 657
WINDOW LIGHT

WD165-20SL 658
WINDOW LIGHT

WD110-03LT 659
WINDOW LIGHT

WD160-06LT 660
WINDOW LIGHT

WD100-06LT 661
WINDOW LIGHT

WD10001-07RL 662
WINDOW LIGHT

WD62-03LT 663
WINDOW LIGHT

WD148-07LT 664
WINDOW LIGHT

WD108-07LT 665
WINDOW LIGHT

WD85-06LT 666
WINDOW LIGHT

WD129-08SL 667
WINDOW LIGHT

Pixel Light

PX24-01SL 669
PIXEL LIGHT

PX52-02SL 671
PIXEL LIGHT

PX52-03SL 672
PIXEL LIGHT

PX90-03LD 673
PIXEL LIGHT

PX110-06SL 675
PIXEL LIGHT

PX60-02SL 675
PIXEL LIGHT

PX150-08EXC 677
PIXEL LIGHT

PX97-15EXC 678
PIXEL LIGHT

LED Tube

LT24-12RL 673
LED TUBE

LT33-15RL 674
LED TUBE

LT48-12RL 675
LED TUBE

LT48B-12RL 676
LED TUBE

LT50-12LD 677
LED TUBE

LT31-12LD 679
LED TUBE

LT31-15LD 680
LED TUBE

Control System

H803TC 687
CONTROL SYSTEM

H807SA 688
CONTROL SYSTEM

BP-D2120K 689
CONTROL SYSTEM

BP-GK2120K 690
CONTROL SYSTEM

BP-D100 691
CONTROL SYSTEM

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black



RECESSED CEILING

Model:	A7108R
Power:	2x4W
Luminious:	560lm
Beam angle:	15°/ 24°/ 36°
Dimensions:	

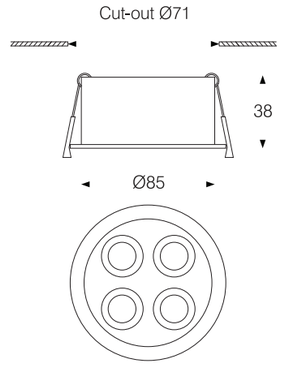

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt Black
- Matt White

Reflector color


- Matt White/ Shiny White
- Matt Black/ Shiny Black



RECESSED CEILING

Model:	A6508S	A9818S
Power:	8W	18W
Luminious:	560lm	1260lm
Beam angle:	24°/ 36°	

Dimensions:

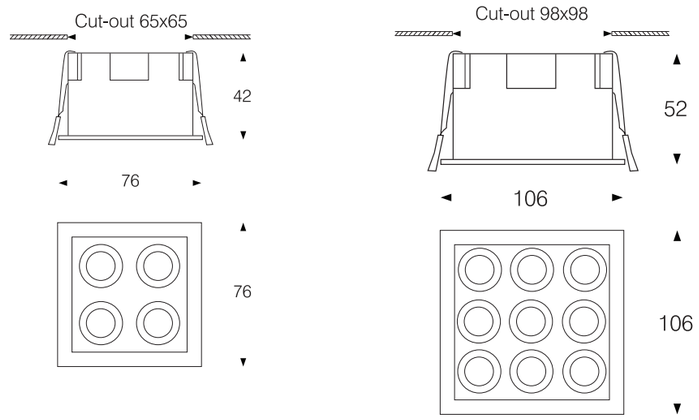

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt Black
- Matt White

Reflector color


- Matt White/ Shiny White
- Matt Black/ Shiny Black





RECESSED CEILING


Model:	A353502L	A653504L	A953506L	A1383510L	A2804520L
Power:	2W	2x2W	3x2W	5x2W	10x2W
Luminious:	150lm	300lm	450lm	750lm	1500lm
Beam angle:	15°/ 24°/ 36°				


Dimensions:









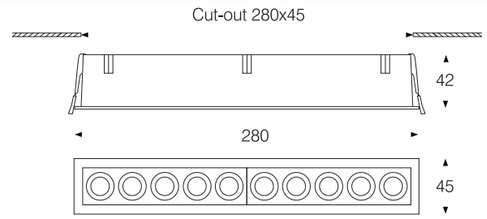

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt Black
- Matt White

Reflector color


- Matt White/ Shiny White
- Matt Black/ Shiny Black




SURFACE

Model:	A6610S	A9618S
Power:	10W	18W
Luminious:	700lm	1350lm
Beam angle:	24°/ 36°	

Dimensions:





General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt Black
- Matt White


Reflector color

- Matt White/ Shiny White
- Matt Black/ Shiny Black



SURFACE


Model:	A13910S
Power:	10W
Luminious:	700lm
Beam angle:	24°/ 36°
Dimensions:	

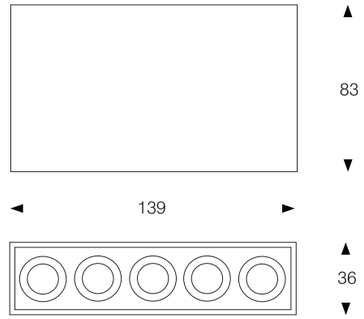

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

BALDER

- The slim lamp body size is only 49mm, suitable for locations with low ceilings
- Optional with 4 Beam angle:s: 15 °-24°-40°-60°
- High Color rendering index (CRI>95)
- IP44 is suitable for areas with high humidity
- Control device options: On/Off, Triac, 0-10V, Dali

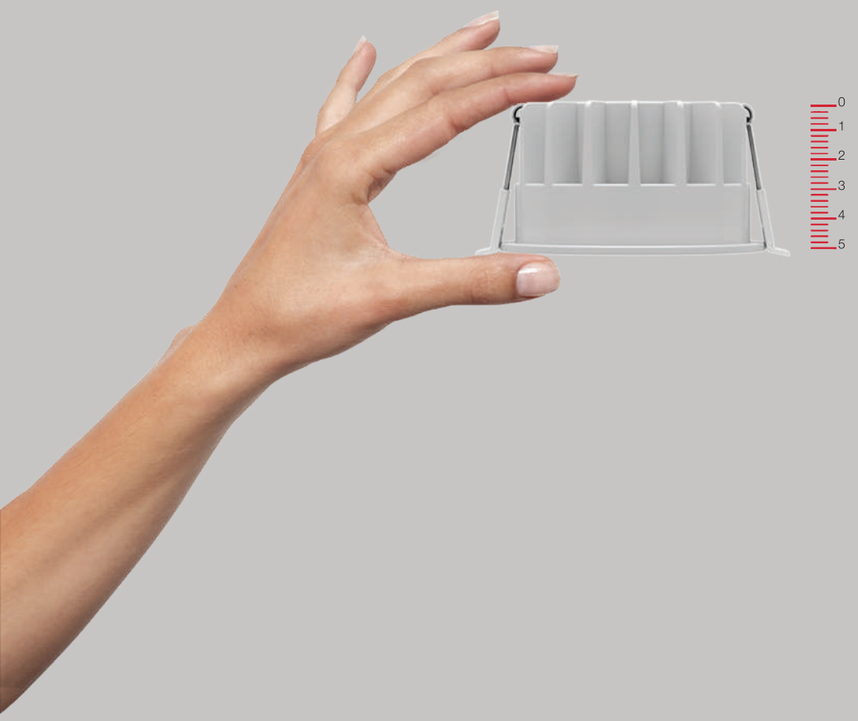



BALDER

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black



RECESSED CEILING

Model:	B8010D
Power:	10W
Luminious:	750lm
Beam angle:	24°/40°
Dimensions:	

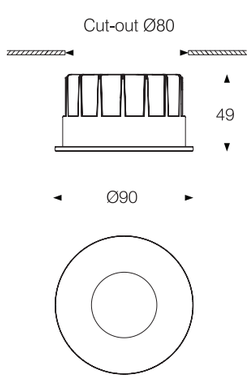

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

BELLIS

Body color

- Metal Grey


Reflector color

- Matt White
- Matt Black/ Shiny Black



RECESSED CEILING

Model:	B5506D	B7512D	B9518D
Power:	6W	12W	18W
Luminious:	480lm	960lm	1440lm
Beam angle:		24°/ 40°/ 55°	
Dimensions:			

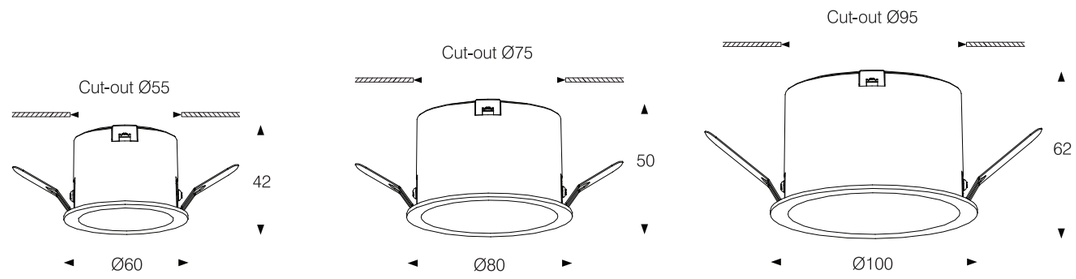

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Matt White


Reflector color

Matt White



RECESSED CEILING

Model:	C5505M	C7507M	C8510M	C9520M
Power:	5W	7W	10W	20W
Luminious:	375lm	525lm	750lm	1500lm
Beam angle:			60°	
Dimensions:				

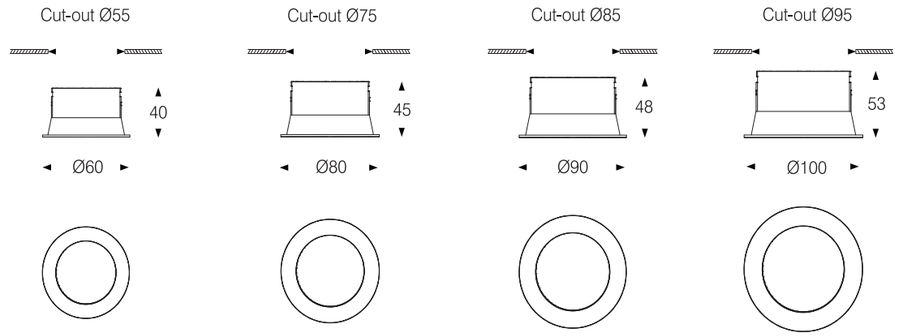

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

ULTRA-THIN BEZEL DESIGN

Diverse color range to satisfy all your demands.



CHARON

VISUAL COMFORT

Better beam control, more artistic atmosphere



Body color

- Matt Black
- Matt White

Reflector color


- Matt White
- Matt Black




RECESSED CEILING

Model:	C5507D	C7512D
Power:	7W	12W
Luminious:	525lm	900lm
Beam angle:	15°/ 24°/ 36°	24°/ 36°/ 55°

Dimensions:

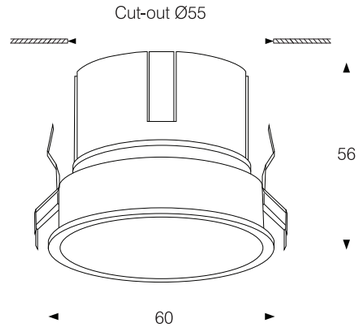

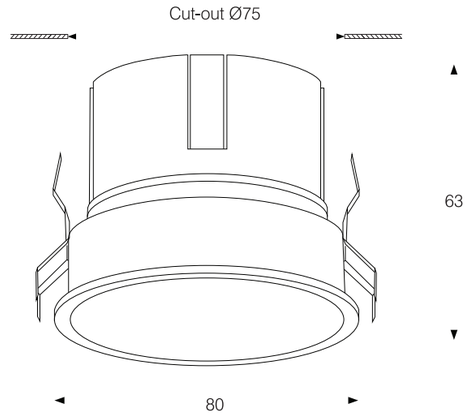


General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Fast Connector

Focusing Module

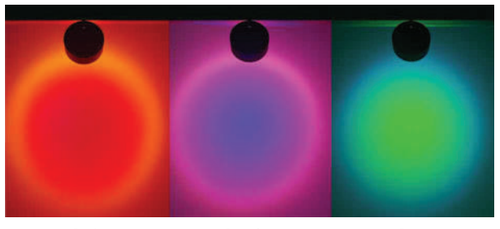

Red Purple Green

0-10V Step Dimmer Control

DALI Dimmer Control

Wireless intel-ligent control

Knob Button Dimmer control

Optics Module



Diffusion filter Honeycomb Diffusion film Striped filter Woven glass




80% Anti-UV filter 98% Anti-UV filter Red filter Green filter Blue filter

Body color

- Matt White
- Matt Black
- Chrome









RECESSED CEILING

Model:	C5613DZ	C6518DF
Power:	13W	18W
Luminious:	720lm	1330lm
Beam angle:	Zoomable 10°-60°	15°/ 20°/ 30°/ 50°
Dimensions:		






General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt White
- Matt Black
- Chrome









TRIMLESS CEILING

Model:	C5613DTZ	C6518DTF
Power:	13W	18W
Luminious:	720lm	1330lm
Beam angle:	Zoomable 10°-60°	15°/20°/30°/50°
Dimensions:		





General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color


- Matt White
- Matt Black
- Chrome





PENDANT

Model:	C6513PTZ	C6518PTF
Power:	13W	18W
Luminious:	720lm	1330lm
Beam angle:	Zoomable 10°-60°	15°/ 20°/ 30°/ 50°
Dimensions:		

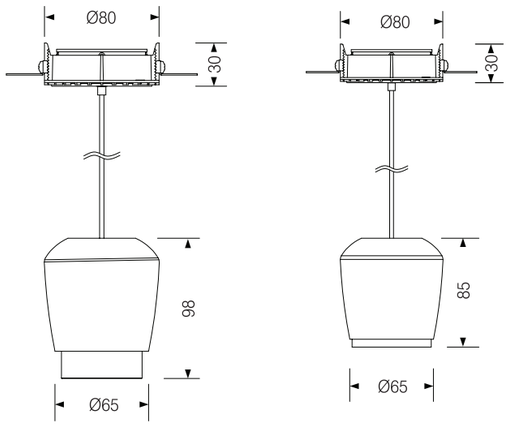


General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt White
- Matt Black
- Chrome









PENDANT

Model:	C6513PDZ	C6518PDF
Power:	13W	18W
Luminious:	720lm	720lm
Beam angle:	Zoomable 10°-60°	15°/ 20°/ 30°/ 50°
Dimensions:		

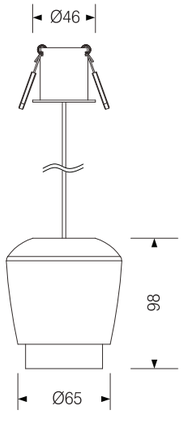

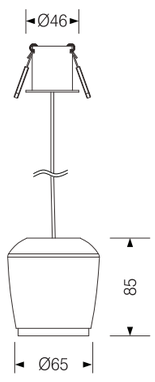


General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt White
- Matt Black
- Chrome








PENDANT

Model:	C6513PSZ	C6518PSF
Power:	13W	18W
Luminious:	720lm	1330lm
Beam angle:	Zoomable 10°-60°	15°/ 20°/ 30°/ 50°

Dimensions:

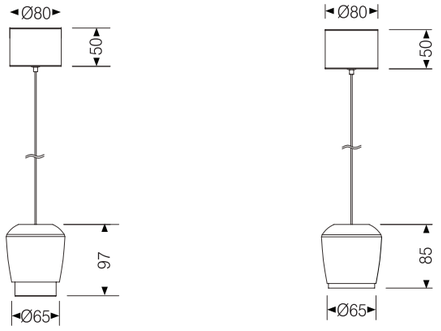


General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt White
- Matt Black
- Chrome






LAMP

Model:	C6513LZ	C6513TZ
Power:	13W	13W
Luminious:	720lm	720lm
Beam angle:	Zoomable 10°-60°	Zoomable 10°-60°

Dimensions:

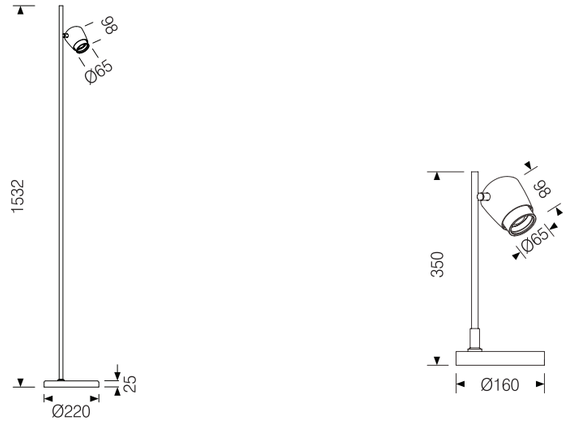

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth, Touch dimming

DROP

Body color
- Matt Black
- Matt White

Reflector color
- Matt White
- Matt Black
- Glitter Gold






RECESSED CEILING

Model:	D8508-A	D8510-A
Power:	8W	10W
Luminious:	560lm	750lm
Beam angle:	15°/ 24°/ 36°	15°/ 24°/ 36°
Dimensions:		


Cut-out Ø85



TRIMLESS CEILING

Model:	D8508-T
Power:	8W
Luminious:	560lm
Beam angle:	15°/ 24°/ 36°
Dimensions:	

Cut-out Ø95

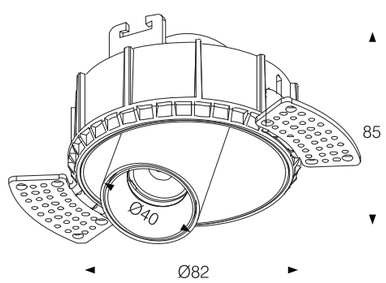


General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color
- Matt Black
- Matt White


Reflector color
- Matt White
- Matt Black

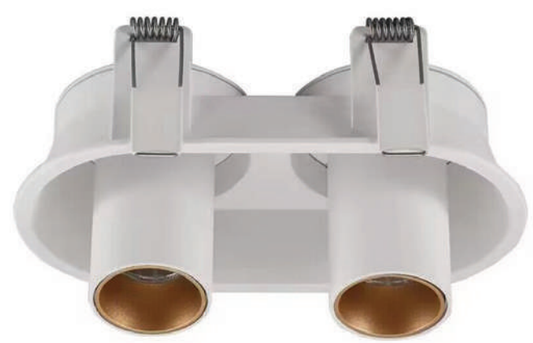

RECESSED CEILING

Model:	D16020-B
Power:	2x10W
Luminious:	1700lm
Beam angle:	15°/ 24°/ 36°
Dimensions:	

Cut-out Ø160x85

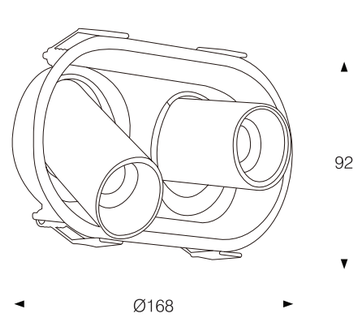

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Matt Black

Matt White

Reflector color

Matt White

Matt Black







RECESSED CEILING

Model:	EB4510C-F	EB5010C-A
Power:	10W	10W
Luminious:	787lm	787lm
Beam angle:	15°/ 24°/ 36°/ 55°	

Dimensions:

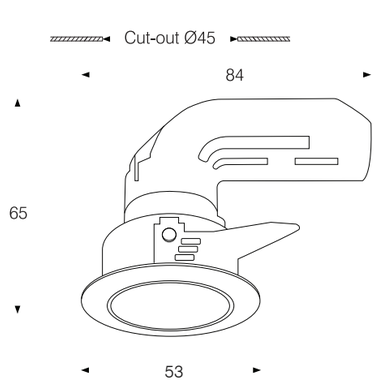

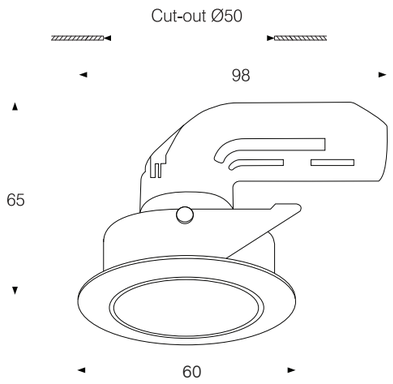

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

Body color

Metal Grey

Reflector color

Matt White








TRIMLESS CEILING

Model:	EB4510TC-F	EB3503TC-A	EB5510TC-A
Power:	10W	3W	10W
Luminious:	787lm	236lm	787lm
Beam angle:	15°/ 24°/ 36°/ 55°		

Dimensions:

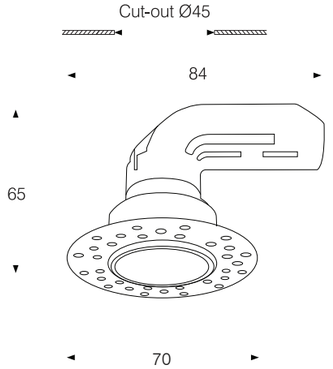

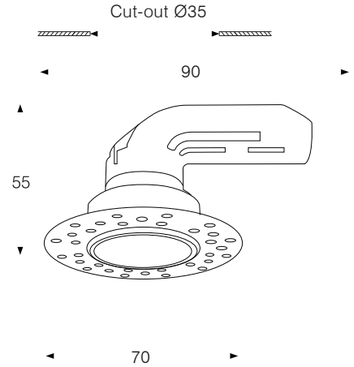

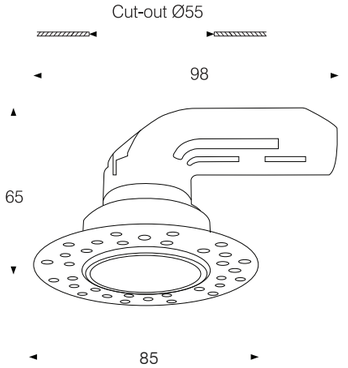

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt Black
- Matt White

Reflector color


- Matt White
- Matt Black



RECESSED CEILING

Model:	EB4510O-F	EB5010O-A
Power:	10W	10W
Luminious:	500lm	500lm
Beam angle:	15°/ 24°/ 36°/ 55°	

Dimensions:

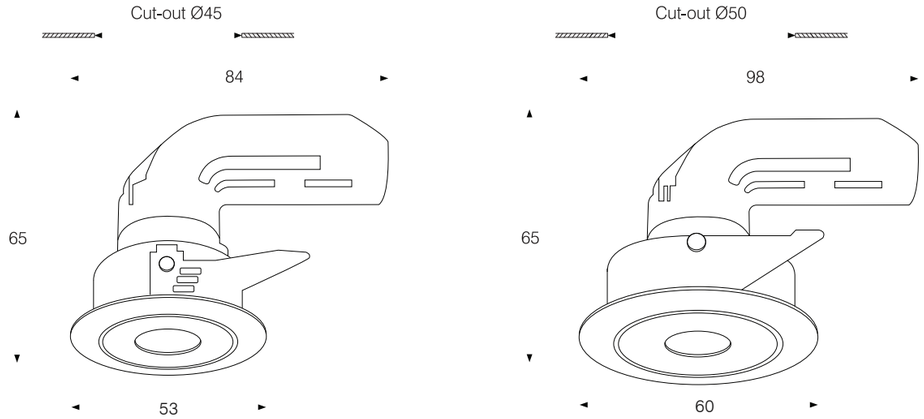

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

Body color

- Matt Black
- Matt White

Reflector color


- Matt White
- Matt Black



TRIMLESS CEILING

Model:	EB4510TO-F	EB3503TO-A	EB5510TO-A
Power:	10W	3W	10W
Luminious:	500lm	236lm	500lm
Beam angle:	15°/ 24°/ 36°/ 55°		

Dimensions:

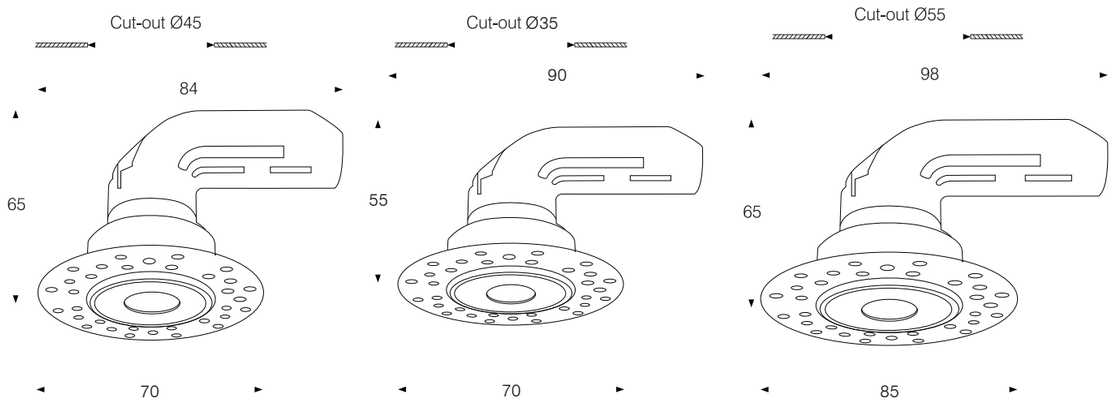

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

Body color

Matt Black

Matt White

Reflector color

Matt White

Matt Black







RECESSED CEILING

Model:	EB4510B-F	EB5010B-A
Power:	10W	10W
Luminious:	400lm	400lm

Dimensions:

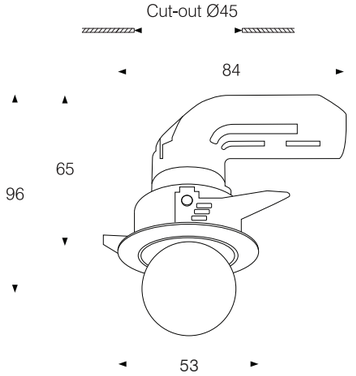

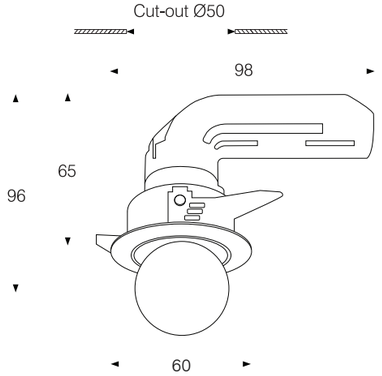

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

Body color

Matt Black

Matt White

Reflector color

Matt White


Matt Black






TRIMLESS CEILING

Model:	EB4510TB-F	EB5510TB-A
Power:	10W	10W
Luminious:	400lm	400lm

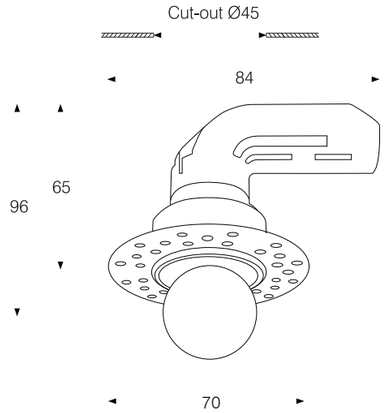

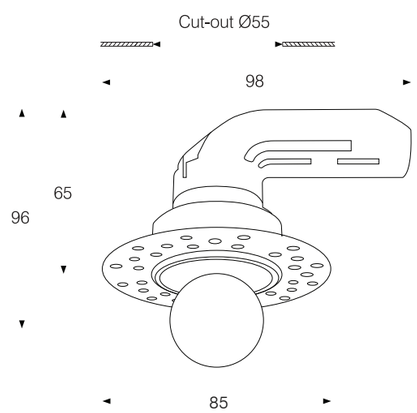

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

ELBOW

Body color

- Matt Black
- Matt White

Reflector color

- Matt White
- Matt Black







20°

RECESSED CEILING

Model:	EB4510R-F	EB5010R-A
Power:	10W	10W
Luminious:	400lm	400lm

Dimensions:

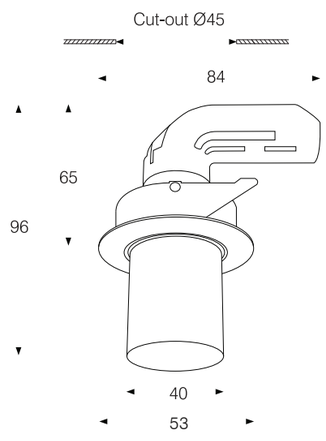

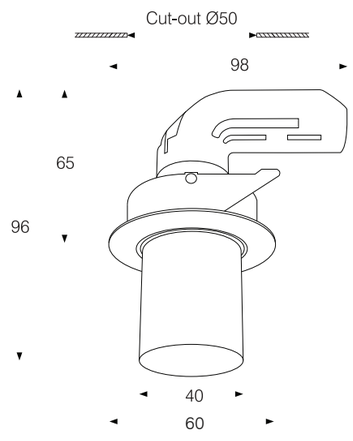

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

ELBOW

Body color

- Matt Black
- Matt White

Reflector color

- Matt White
- Matt Black







20°

TRIMLESS CEILING

Model:	EB4510TR-F	EB5510TR-A
Power:	10W	10W
Luminious:	400lm	400lm

Dimensions:

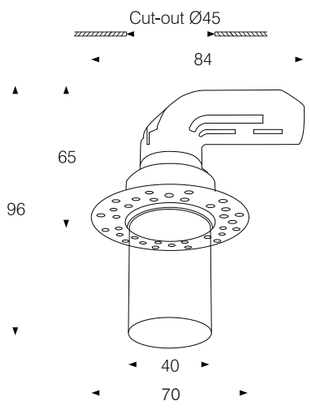

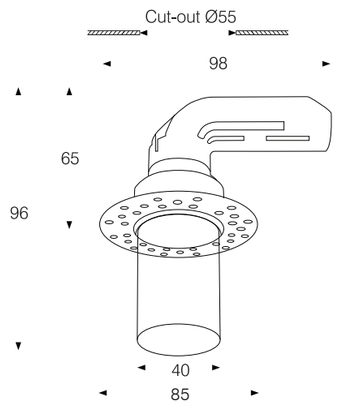

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

ULTRA-THIN BEZEL DESIGN

As a concise, visually striking lighting fixture, the light source has deep anti-glare, precise light control, and can present perfect lighting.



The charm of creating circular light effects


zigbee
Bluetooth
Wi Fi
tuya
WORKS WITH amazon alexa
works with the Google Assistant
RGB + WW + CW

EROS

Tunable White



EROS

Body color

Metal Grey

Reflector color


Matt White/ Shiny White

Matt Black/ Shiny Black

Gloss Silver








Honey Comb Frost Strip Grid

RECESSED CEILING

Model:	E7507C	E7512C	E7518C	E9525C
Power:	7W	12W	18W	25W
Luminious:	525lm	900lm	1350lm	1875lm
Beam angle:	15°/ 24°/ 36°/ 55°			

Dimensions:

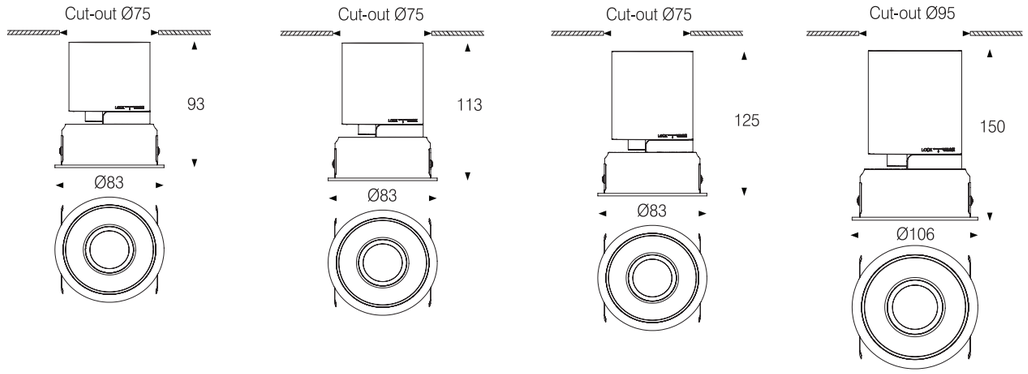

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

EROS

Body color

Metal Grey

Reflector color

Matt White/ Shiny White

Matt Black/ Shiny Black

Gloss Silver






Honey Comb Frost Strip Grid

RECESSED CEILING

Model:	E7507S	E7512S	E7518S	E9525S
Power:	7W	12W	18W	25W
Luminious:	525lm	900lm	1350lm	1875lm
Beam angle:	15°/24°/36°/55°			

Dimensions:

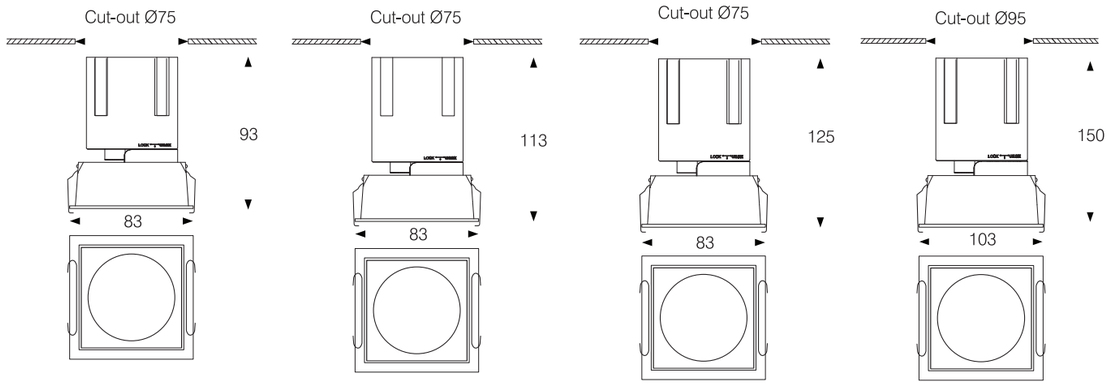

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



EROS

Body color

Metal Grey

Reflector color


Matt White



RECESSED CEILING

Model:	E7507O	E7512O	E7518O	E9525O
Power:	7W	12W	18W	25W
Luminious:	525lm	900lm	1350lm	1800lm
Beam angle:	15°/ 24°/ 36°			

Dimensions:

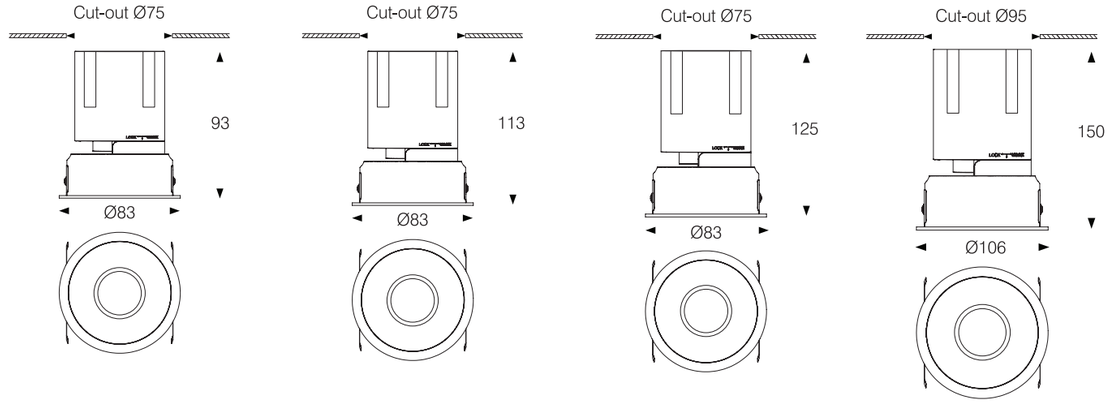

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

EROS

Body color

Metal Grey

Reflector color


Matt White



RECESSED CEILING

Model:	E7507E	E7512E	E7518E
Power:	7W	12W	18W
Luminious:	525lm	900lm	1350lm
Beam angle:		24°/ 36°	

Dimensions:

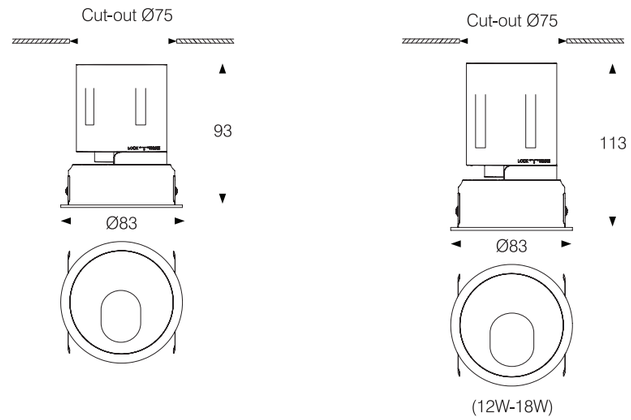

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

EROS

Body color

Metal Grey

Reflector color

Gloss Silver






RECESSED CEILING

Model:	E7510W	E7518W	E9525W
Power:	10W	18W	25W
Luminious:	600lm	1350lm	1875lm
Beam angle:		60°	

Dimensions:

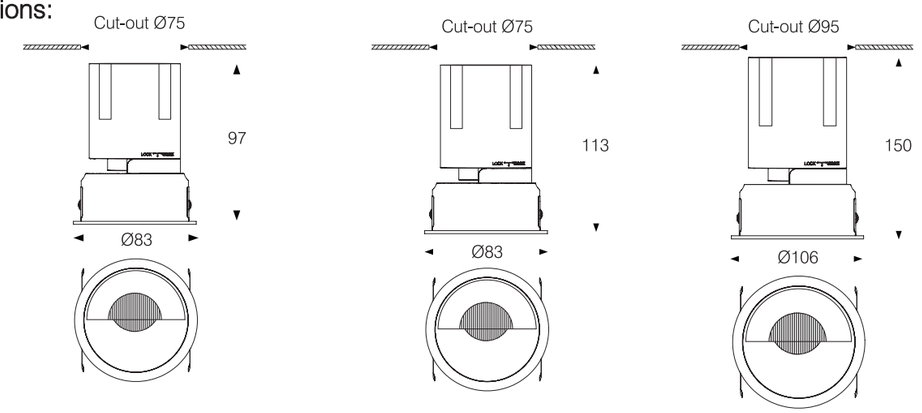

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

EROS

Body color

Metal Grey

Reflector color

Gloss Silver






RECESSED CEILING

Model:	E7510SW	E7518SW	E9525SW
Power:	10W	18W	25W
Luminious:	600lm	1350lm	1825lm
Beam angle:		60°	

Dimensions:

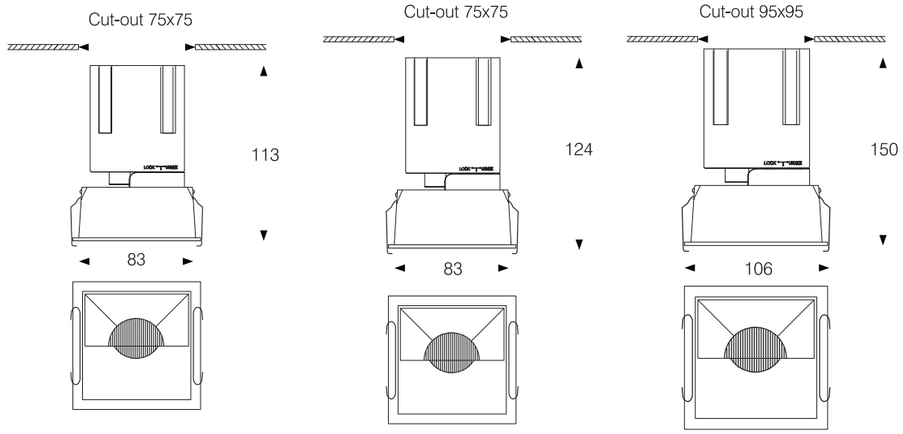

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

EROS TRIMLESS

New design with an edgeless structure beneath the ceiling surface,
making the ceiling surface neater and enhancing aesthetics

EROS

Body color

Metal Grey

Reflector color

Matt White/ Shiny White

Matt Black/ Shiny Black

Gloss Silver








Honey Comb Frost Strip Grid

TRIMLESS CEILING

Model:	E7507TC	E7512TC	E7518TC	E9525TC
Power:	7W	12W	18W	25W
Luminious:	525lm	900lm	1350lm	1875lm
Beam angle:	15°/ 24°/ 36°/ 55°			

Dimensions:

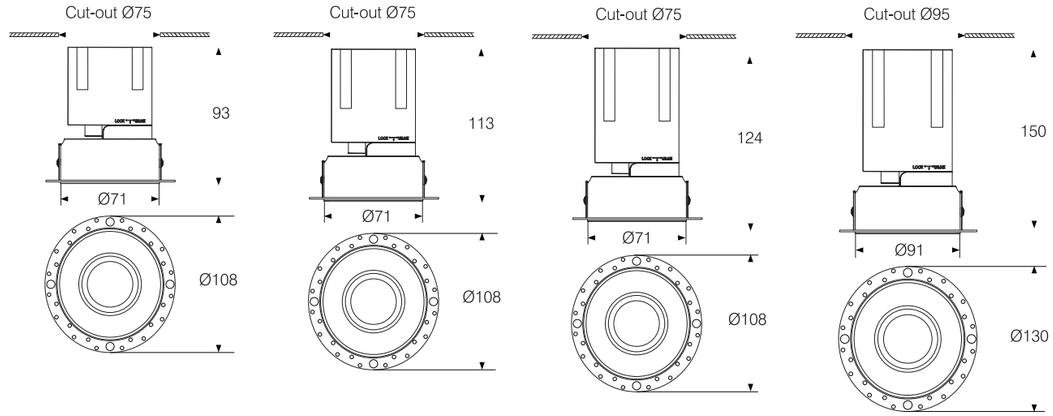

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

EROS

Body color

Metal Grey

Reflector color


Matt White/ Shiny White

Matt Black/ Shiny Black

Gloss Silver








Honey Comb Frost Strip Grid

TRIMLESS CEILING

Model:	E7507TS	E7512TS	E7518TS	E9525TS
Power:	7W	12W	18W	25W
Luminious:	525lm	900lm	1350lm	1875lm
Beam angle:	15°/ 24°/ 36°/ 55°			

Dimensions:

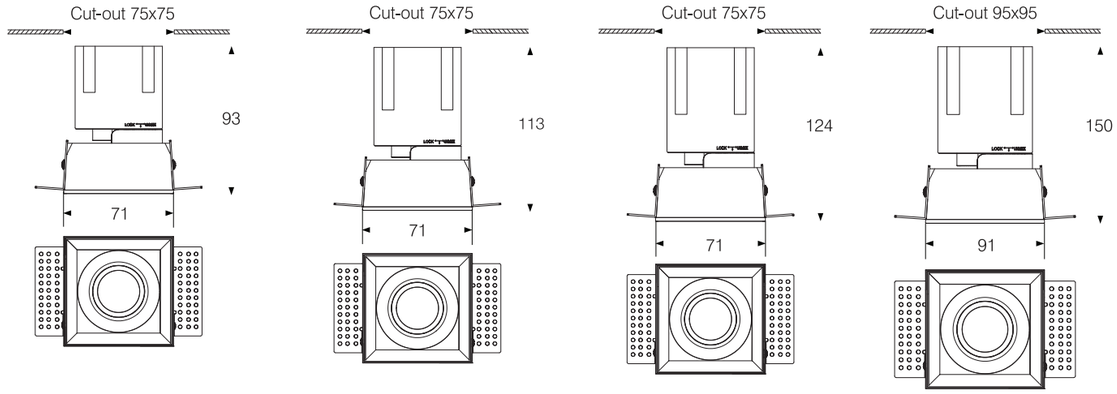

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Metal Grey

Reflector color

Matt White






TRIMLESS CEILING

Model:	E7507TO	E7512TO	E7518TO	E9525TO
Power:	7W	12W	18W	25W
Luminious:	525lm	900lm	1350lm	1800lm
Beam angle:	15°/ 24°/ 36°			

Dimensions:

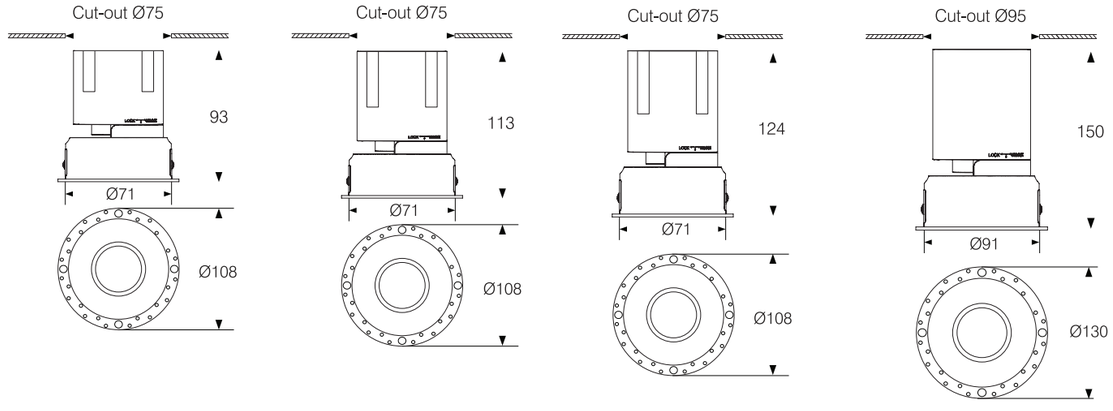

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Metal Grey

Reflector color

Matt White






TRIMLESS CEILING

Model:	E7507TE	E7512TE	E7518TE
Power:	7W	12W	18W
Luminious:	525lm	900lm	1350lm
Beam angle:	15°/ 24°/ 36°		

Dimensions:

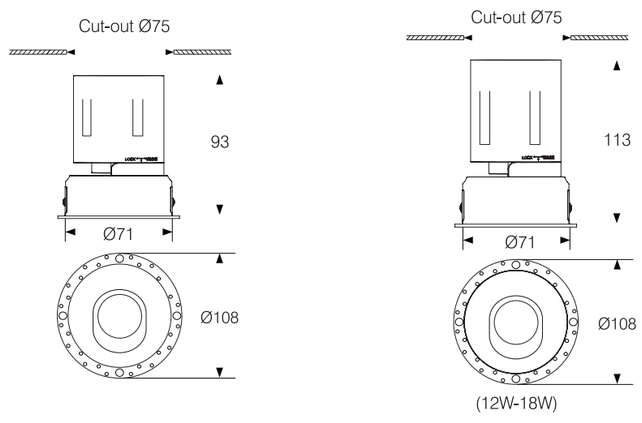

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Metal Grey

Reflector color

Gloss Silver








TRIMLESS CEILING

Model:	E7510TW	E7518TW	E9525TW
Power:	10W	18W	25W
Luminious:	600lm	1350lm	1875lm
Beam angle:		60°	

Dimensions:

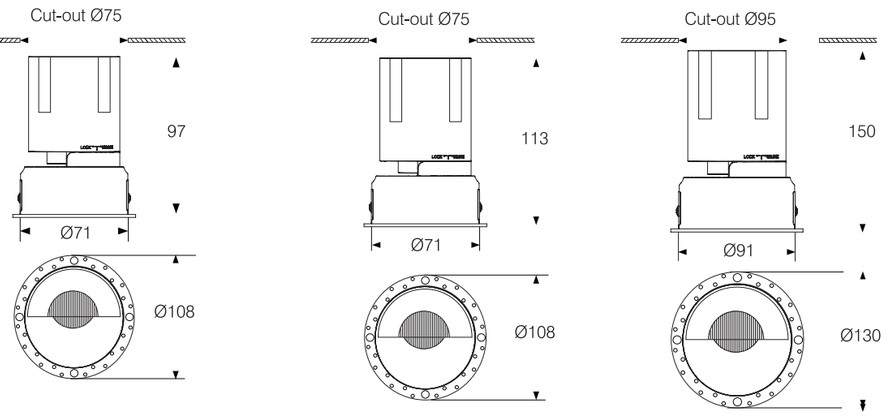

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Metal Grey

Reflector color

Gloss Silver








TRIMLESS CEILING

Model:	E7510TSW	E7518TSW	E9525TSW
Power:	10W	18W	25W
Luminious:	600lm	1350lm	1875lm
Beam angle:		60°	

Dimensions:

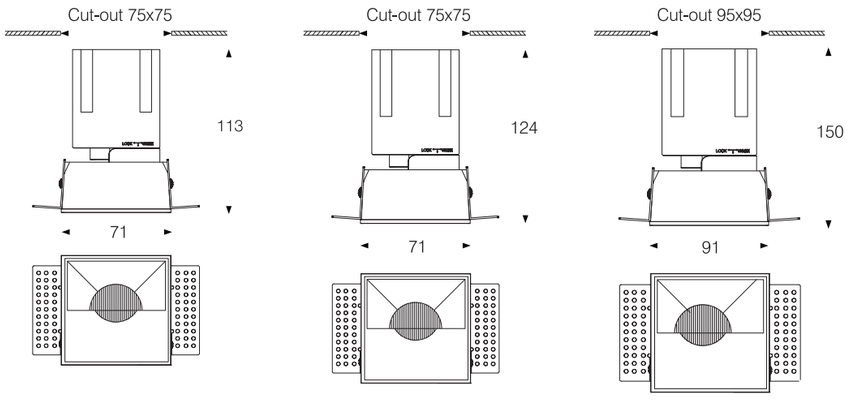

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color


- Matt White
- Matt Black




RECESSED CEILING

Model:	F3503D	F4505D	F4507D
Power:	3W	5W	7W
Lumini-	210lm	350lm	490lm
Beam angle:	8°/ 15°/ 24°/ 36°	15°/ 24°/ 36°	

Dimensions:

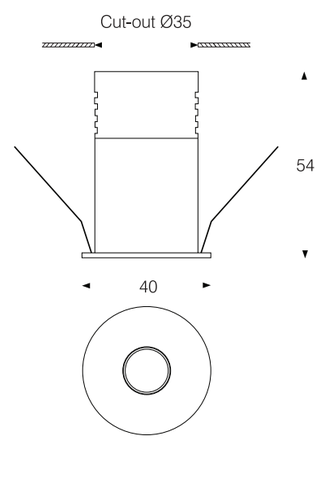

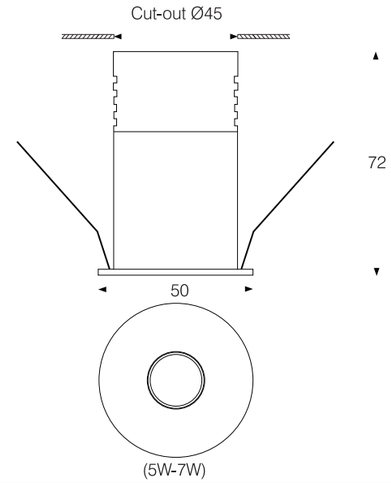

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Matt White

Reflector color

Preal Black

Matt Black


Matt White




RECESSED CEILING

Model:	F5503EL	F5505EL	F7507EL
Power:	3W	5W	7W
Luminious:	225lm	375lm	750lm
Beam angle:		5°	

Dimensions:

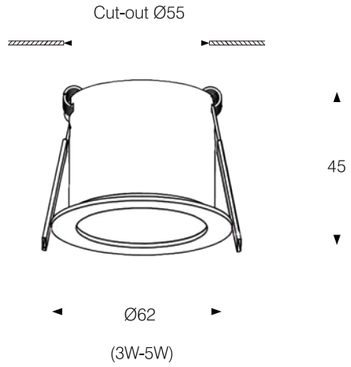

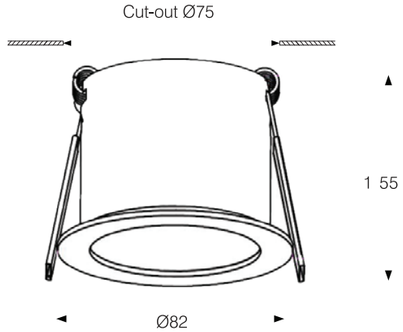


General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Elevating your design with
the innovative Focus Pro lights.

With adjustable features, the Focus Pro lights allows you to effortlessly change the projection angle which provides unparalleled flexibility to meet the unique requirements of your project.

ZOOMABLE 15°-55°



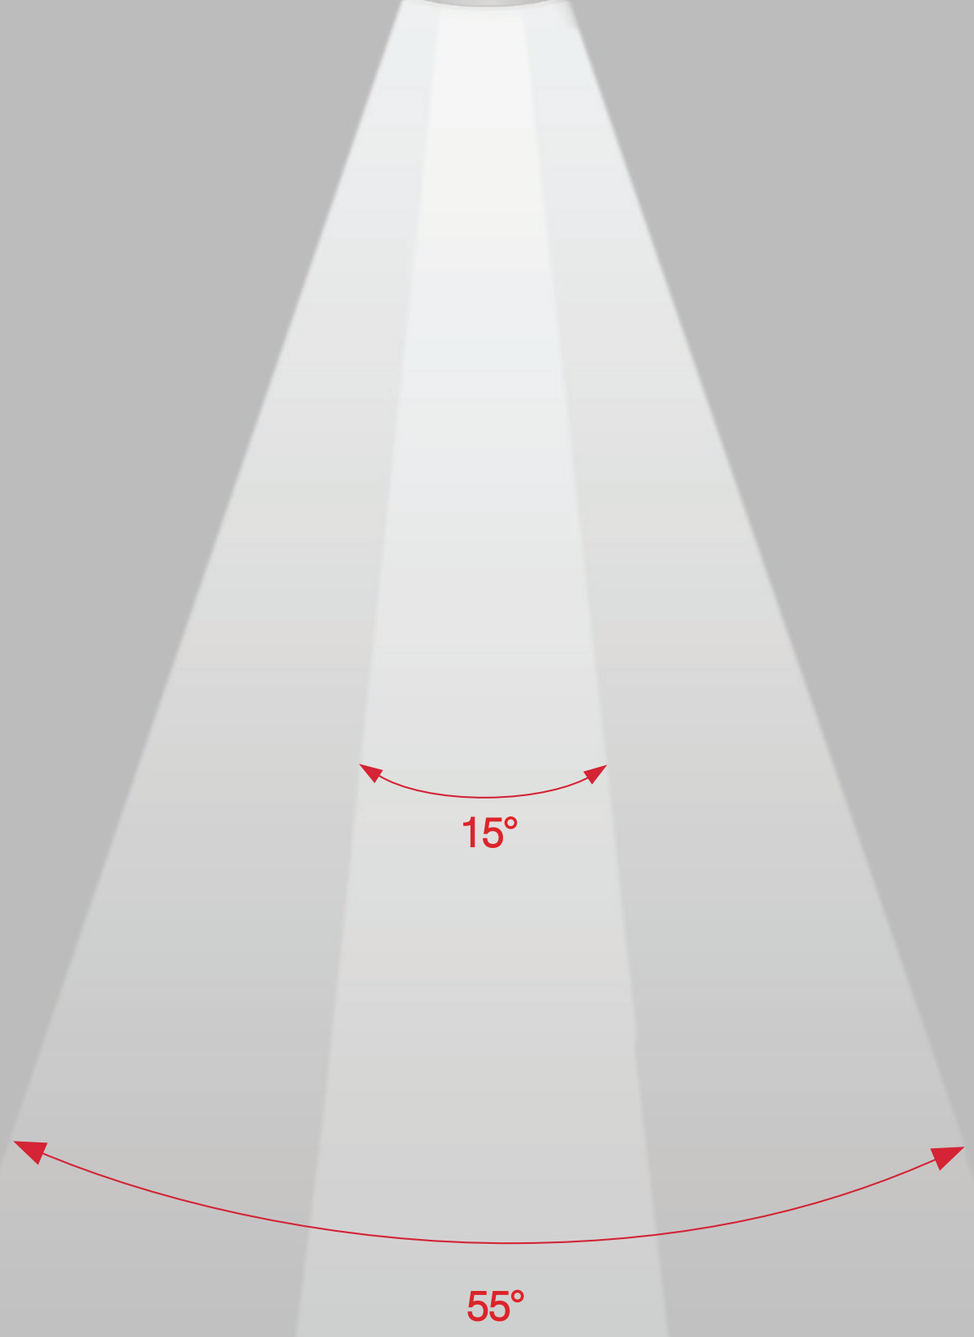

Body color

- Matt White
- Matt Black


Reflector color

- Matt White
- Matt Black/ Pearl Black



RECESSED CEILING


Model:	F7010Z
Power:	10W
Lumini-	700lm
Beam angle:	Zoomable 15°-55°
Dimensions:	

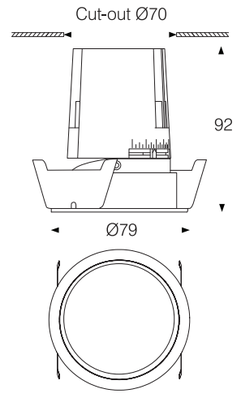


General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

HELIOS

- The Helios uses an asymmetrical hinge that allows for 90° of tilt and 355° of rotation. The unique feature of this hinge is the thin, seamless tube shape that increases aesthetics.
- Suitable for residential, store,…..

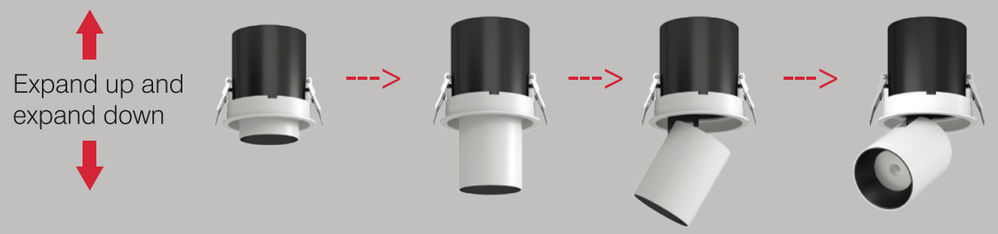

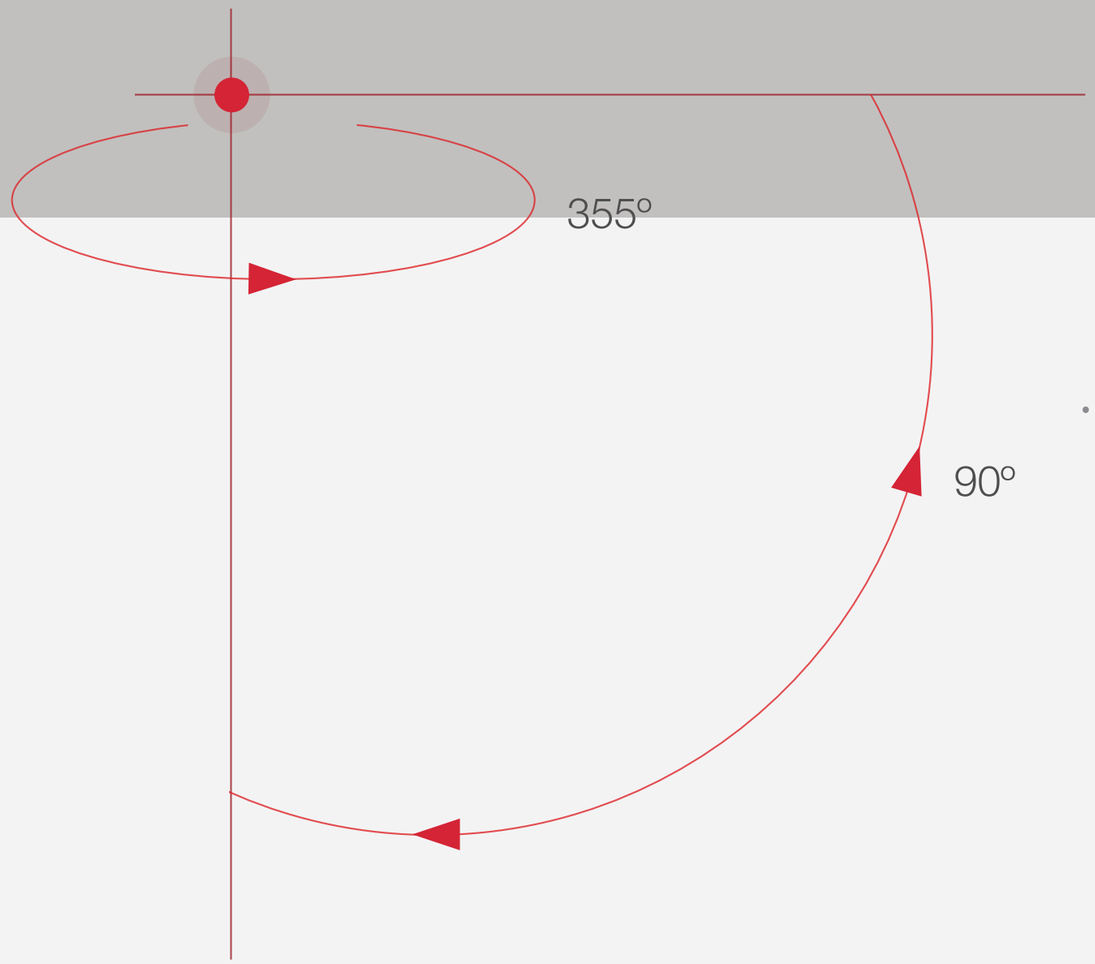

Folding 90°and rotating 355° allows the lamp to illuminate exactly where needed



HELIOS

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black



RECESSED CEILING

Model:	H7507C	H9015C
Power:	7W	15W
Luminious:	525lm	1125lm
Beam angle:	15°/24°	24°
Dimensions:		

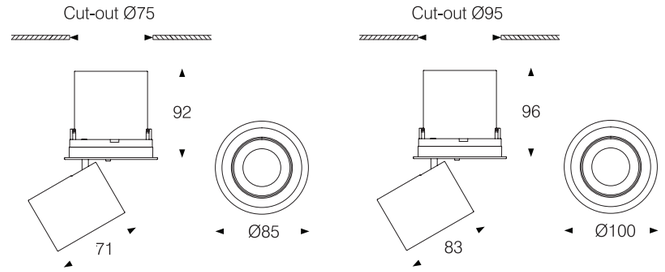

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black



RECESSED CEILING

Model	H7520R
Power:	2x10W
Lumini-	2x750lm
Beam angle:	15°/ 24°/ 36°
Dimensions:	



General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt White
- Matt Black

Reflector color


- Matt White
- Matt Black



RECESSED CEILING

Model:	L1010S	L1020R	L2830R
Power:	10W	2x10W	3x10W
Luminious:	750lm	1500lm	2250lm
Beam angle:		15°/ 24°/ 40°	

Dimensions:

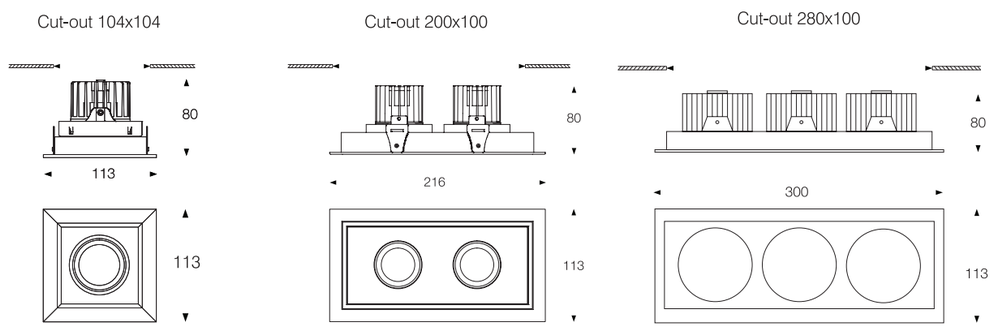

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

MARS

Body color

Metal Grey

Reflector color

Matt White

Matt Black


Gloss Silver



RECESSED CEILING

Model	M7508A	M7512A	M9518A	M9525A
Power:	8W	12W	18W	25W
Lumini-	600lm	900lm	1350lm	1875lm
Beam angle:	15°/ 24°/ 38°/ 55°			

Dimensions:

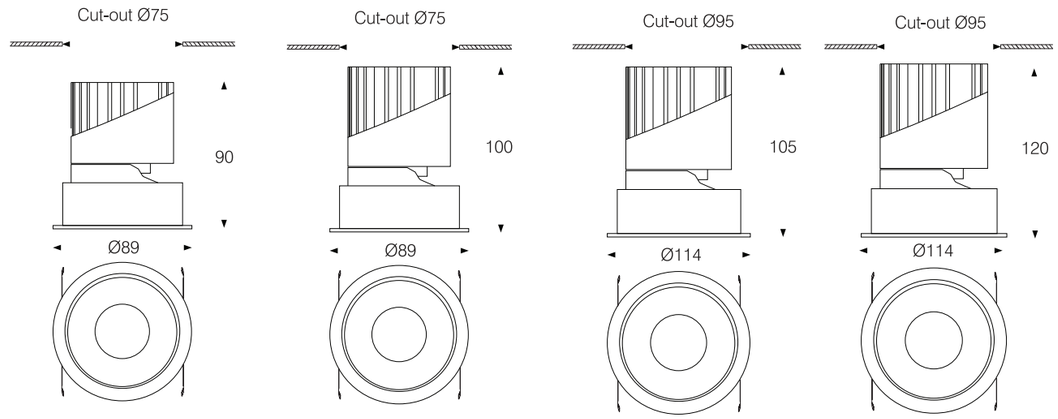

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

MARS

Body color

Metal Grey

Reflector color


Matt White




RECESSED CEILING

Model:	M7508E	M7512E	M9518E
Power:	8W	12W	18W
Lumini-	560lm	840lm	1260lm
Beam angle:		15°/ 24°/ 38°	

Dimensions:

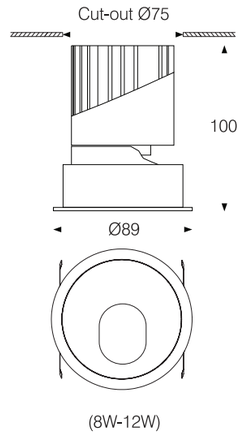

(8W-12W)

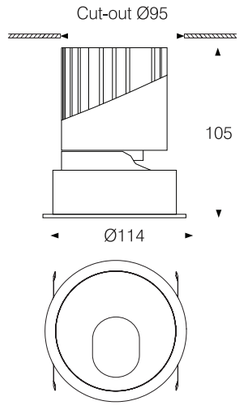

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

MARS

Body color

Metal Grey

Reflector color


Matt White



RECESSED CEILING

Model:	M5506O	M7512O	M9518O	M9525O
Power:	6W	12W	18W	25W
Lumini-	420lm	840lm	1260lm	1750lm
Beam angle:	15°/ 24°/ 38°			

Dimensions:

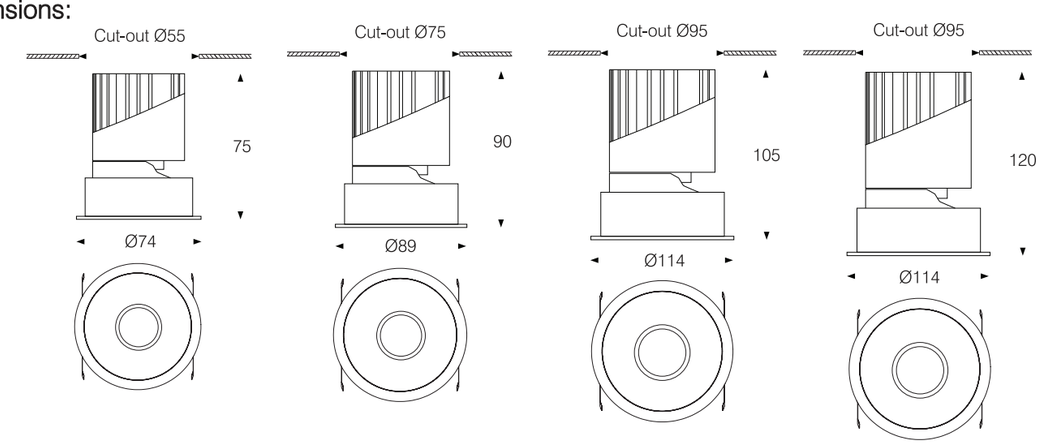

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

MARS

Body color

Metal Grey

Reflector color

Matt White






TRIMLESS CEILING

Model	M7508TA	M7512TA	M9518TA	M9525TA
Power:	8W	12W	18W	25W
Lumini-	600lm	840lm	1260lm	1750lm
Beam angle:	15°/ 24°/ 38°/ 55°			

Dimensions:

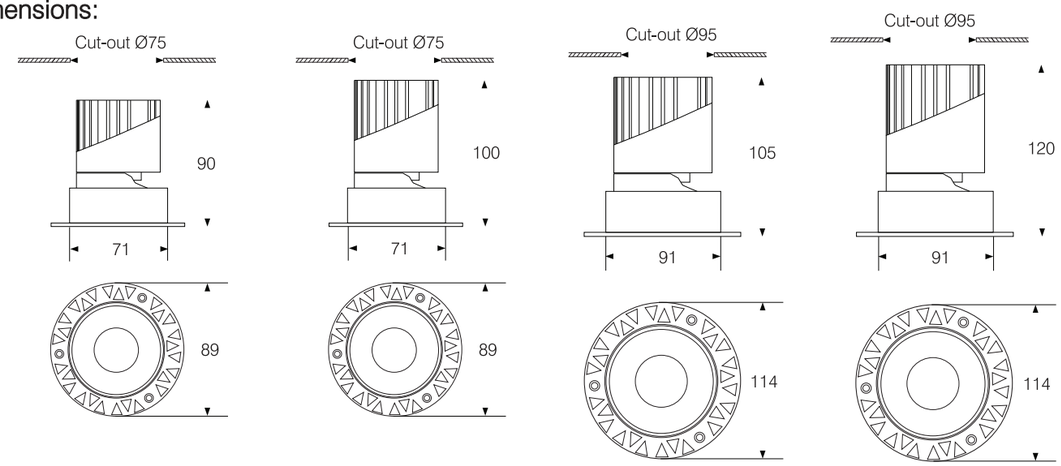

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

MARS

Body color

Metal Grey

Reflector color


Matt White





TRIMLESS CEILING

Model:	M7508TE	M7512TE	M9518TE
Power:	8W	12W	18W
Luminious:	560lm	840lm	1260lm
Beam angle:		15°/ 24°/ 38°	
Dimensions:			

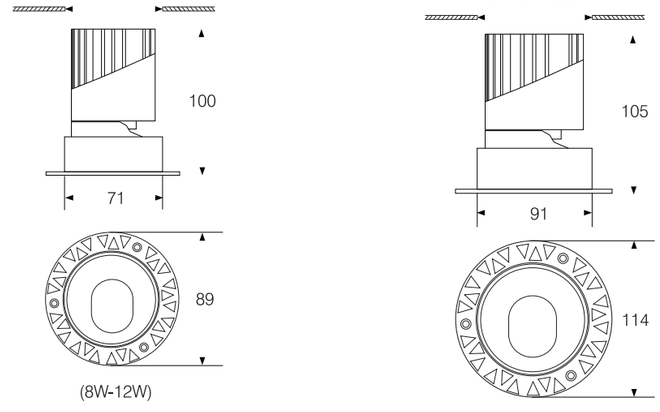

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

MARS

Body color

Metal Grey

Reflector color


Matt White





TRIMLESS CEILING

Model	M5506TO	M7512TO	M9518TO	M9525TO
Power:	6W	12W	18W	25W
Luminious:	420lm	840lm	1260lm	1750lm
Beam angle:		15°/ 24°/ 38°		
Dimensions:				

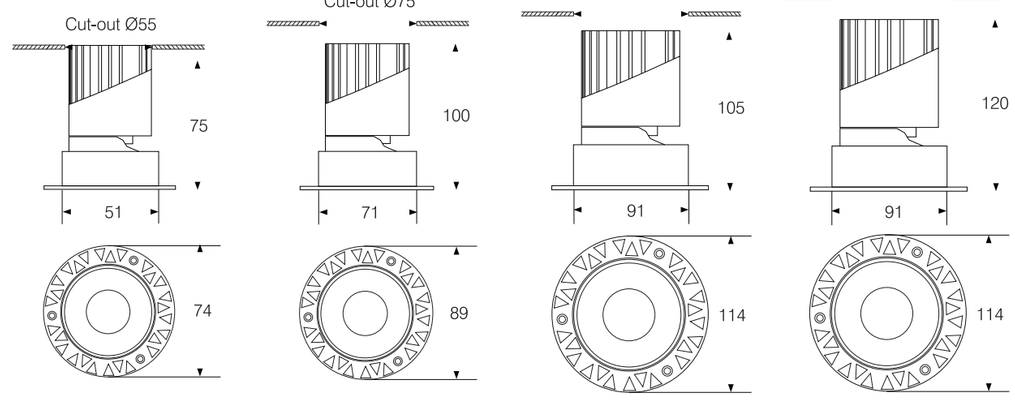

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

Matt White

Reflector color


Matt White




RECESSED CEILING

Model:	M7510-IP65	M9520-IP65
Power:	10W	20W
Luminious:	750lm	1500lm
Beam angle:	24°/ 36°	24°/ 36°

Dimensions:

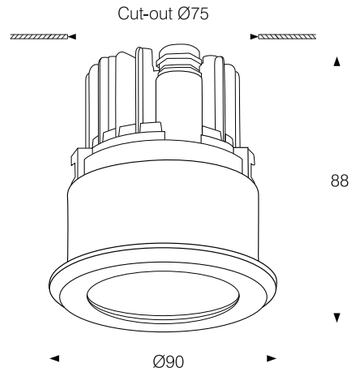

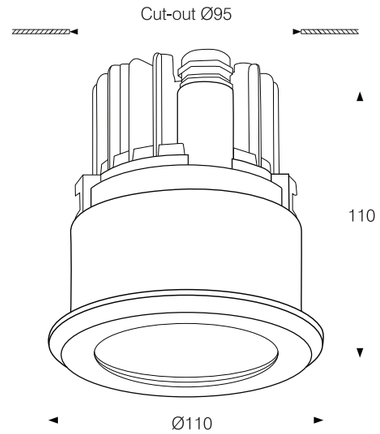

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color


Matt Black

Matt White



RECESSED CEILING

Model:	M5008R
Power:	8W
Luminious:	400lm
Beam angle:	24°
Dimensions:	

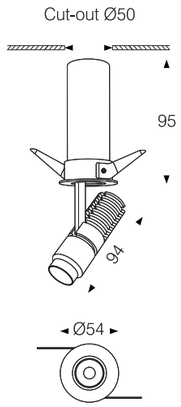

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	98
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable Whitte
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



MAYA

Body color
- Metal White
- Matt Black


Reflector color
- Matt White
- Matt Black






ZOOMABLE RECESSED CEILING			ZOOMABLE TRIMLESS CEILING	
Model:	M4505Z	M4510Z	M4505TZ	M4510TZ
Power:	5W	10W	5W	10W
Luminious:	350lm	700lm	350lm	700lm
Beam angle:	Zoomable 8°-40°		Zoomable 8°-40°	

Dimensions:

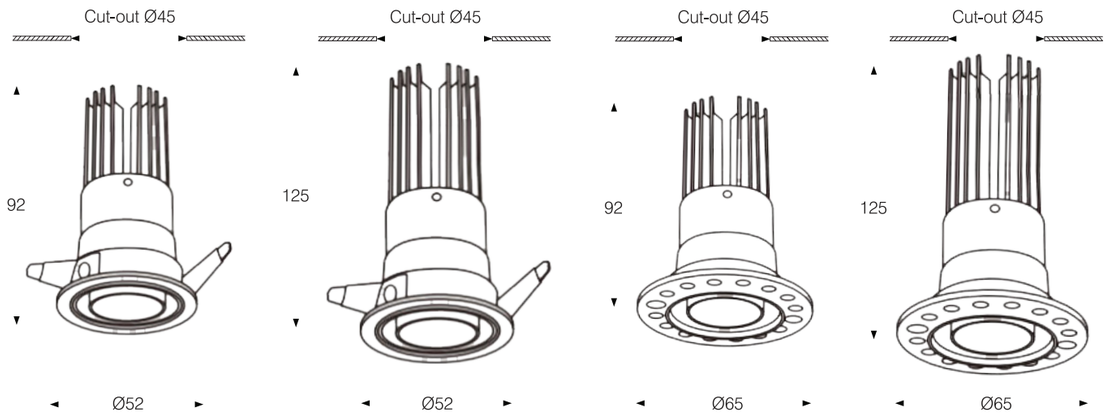

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

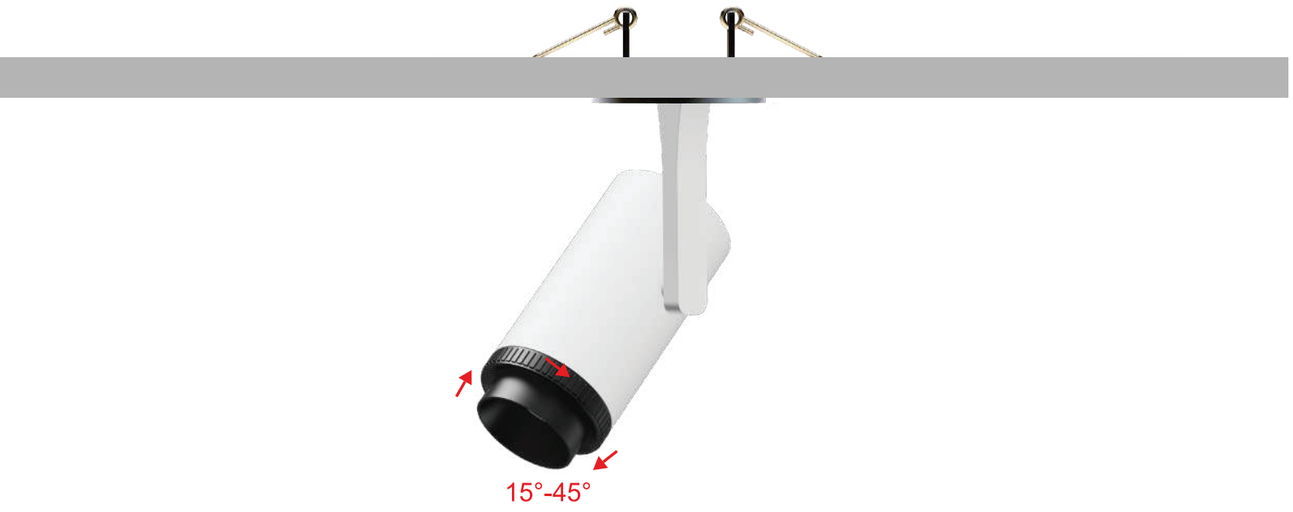

Minimalistic looking but multiple functions; It can be vertically adjustable and rotated horizontally in any direction.

Body color

- Matt White
- Matt Black

Reflector color


- Matt White
- Matt Black




ZOOMABLE RECESSED CEILING

Model	OC3507Z	OC3515Z
Power:	7W	15W
Luminious:	302lm	652lm
Beam angle:	Zoomable 15°-45°	

Dimensions:

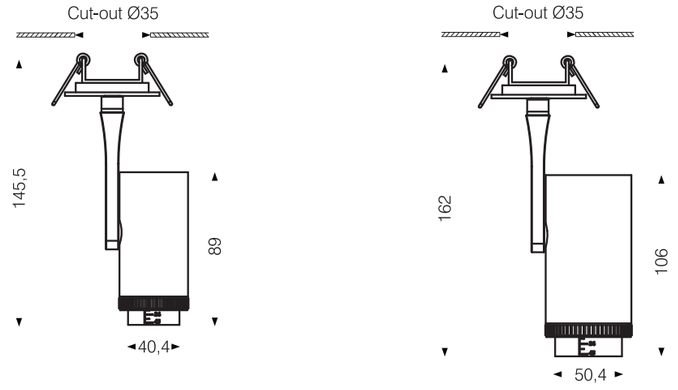

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

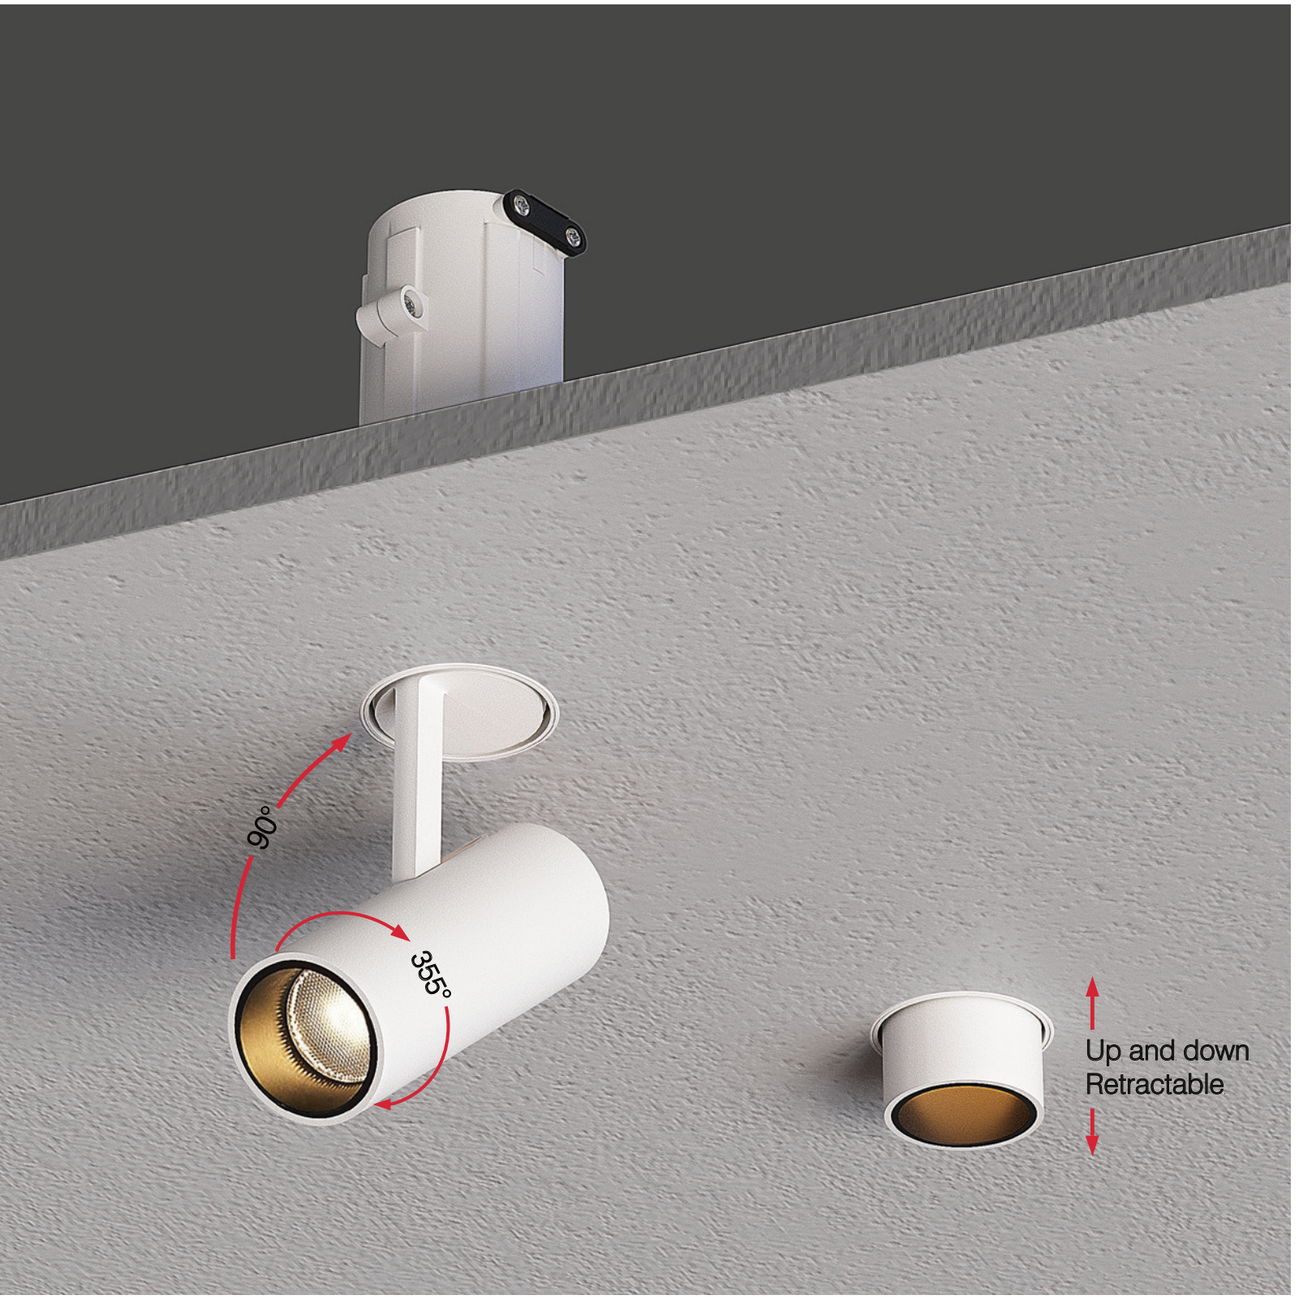

Body color

- Matt White
- Matt Black

Reflector color


- Matt White
- Matt Black







RECESSED CEILING		TRIMLESS CEILING
Model	S4505Z	S4505T
Power:	5W	5W
Luminious:	350lm	350lm
Beam angle:	20°/ 30°/ 40°/ 60°	20°/ 30°/ 40°/ 60°

Dimensions:

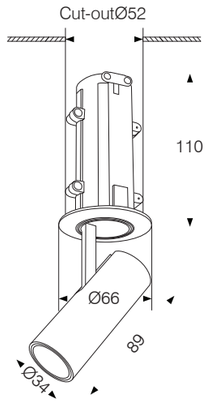

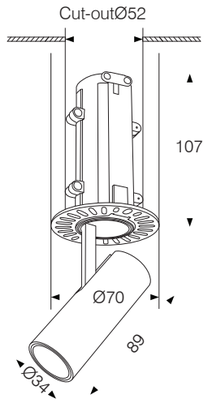

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

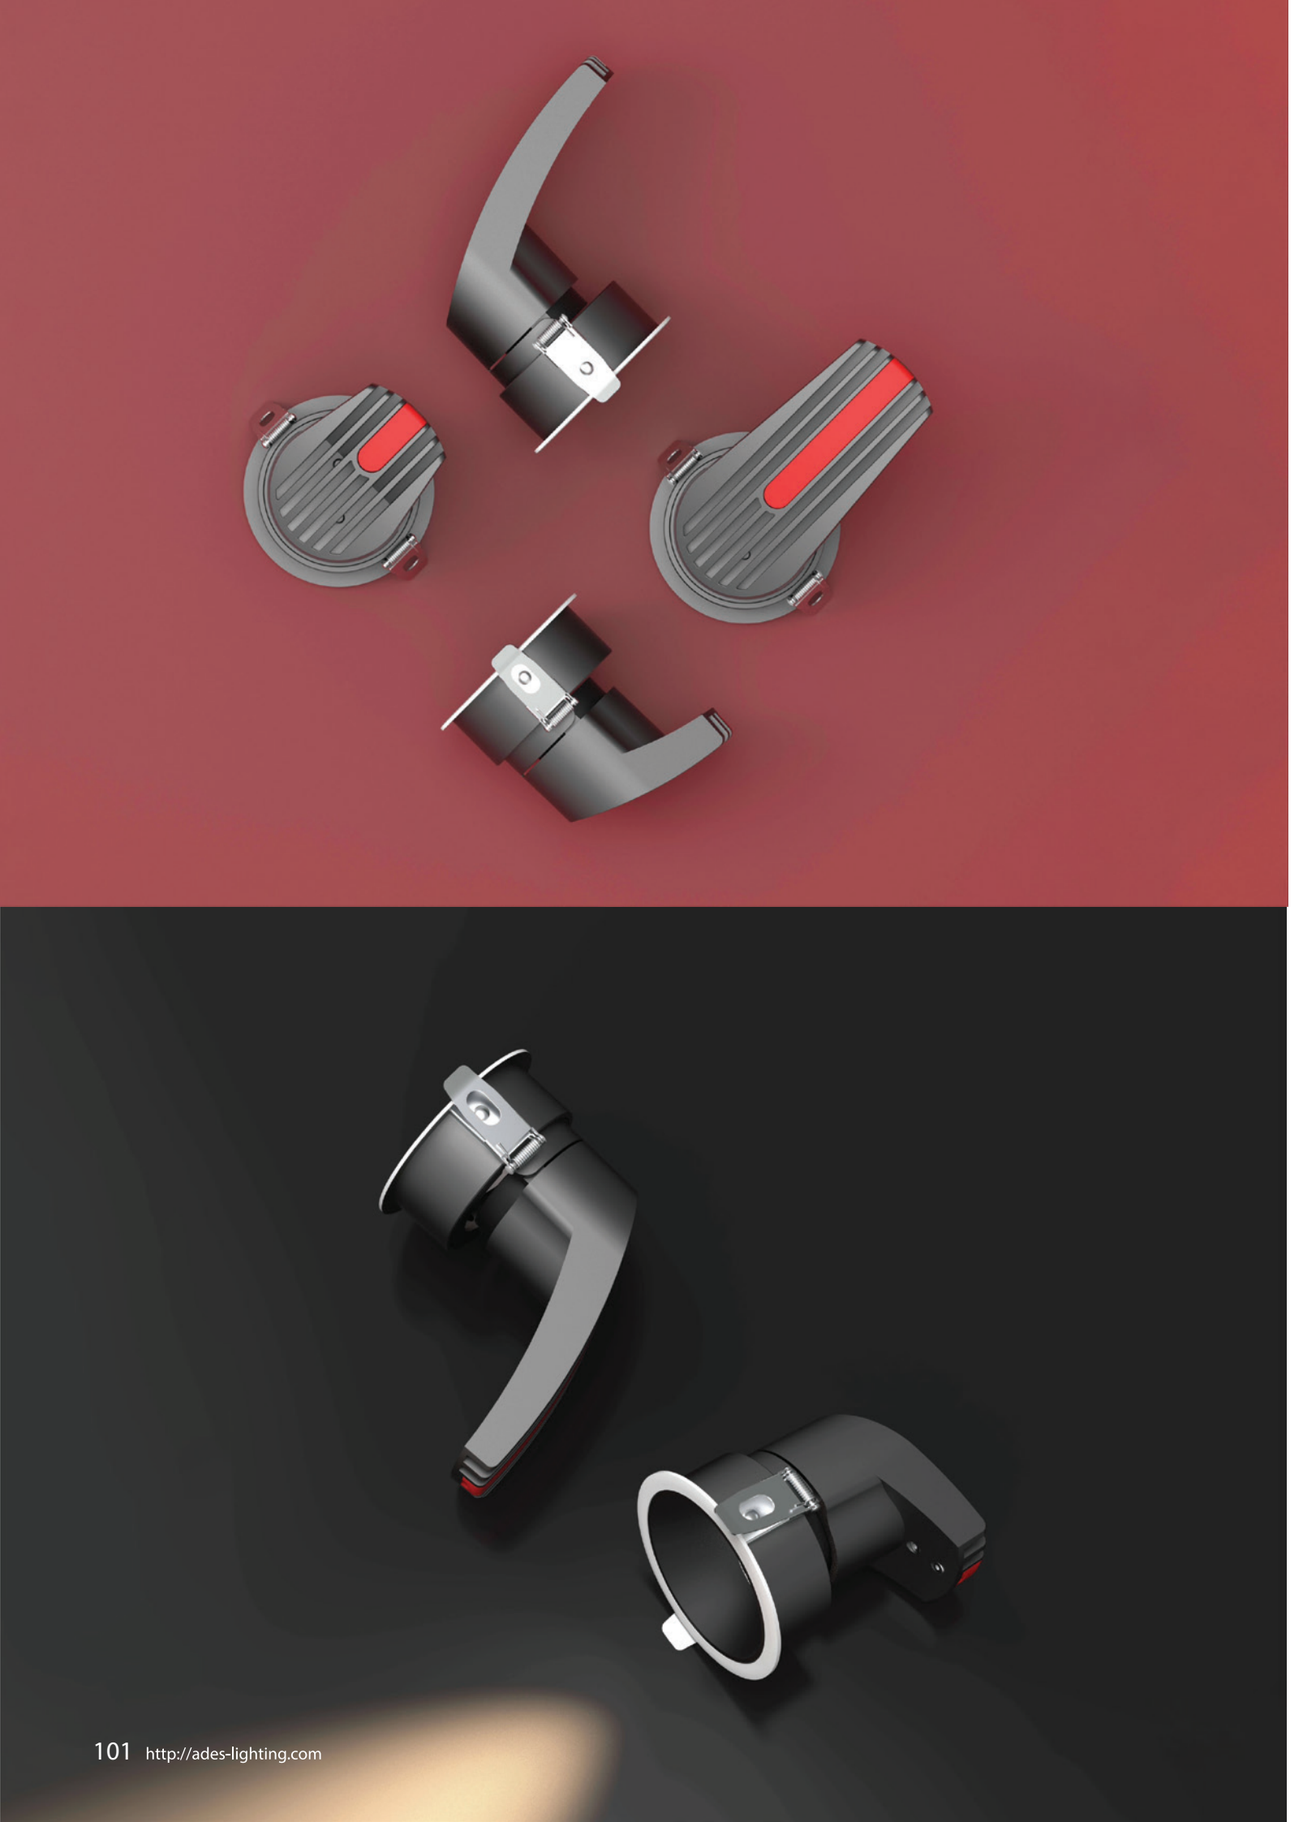

Body color

Metal Grey

Reflector color

Matt White

Matt Black


Gloss Silver



RECESSED CEILING

Model:	S7508C	S7512C	S7515C	S9525C	S9535C
Power:	8W	12W	15W	25W	35W
Lumini-	600lm	900lm	1125lm	1875lm	1350lm
Beam angle:	8°/ 15°/ 24°/ 36°/ 55°				

Dimensions:

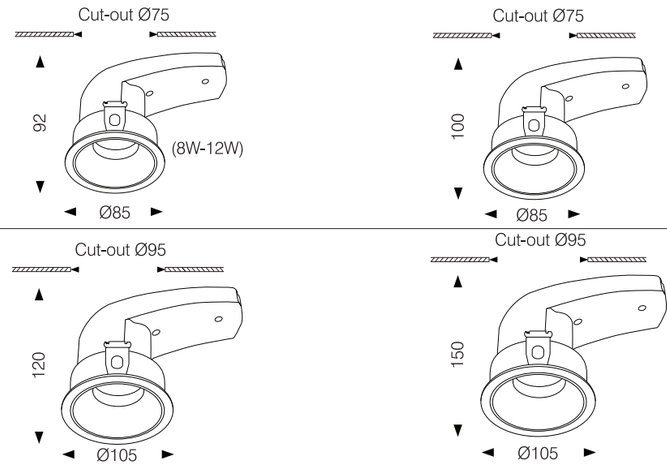

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt White/ Metal Grey
- Matt Black

Reflector color

- Matt White
- Matt Black






Honey Comb

RECESSED CEILING

Model:	T4003A	T4605A	T4607A	T5212A
Power:	3W	5W	7W	12W
Luminious:	195m	375lm	525lm	883lm
Beam angle:	15°/ 24°/ 36°			

Dimensions:

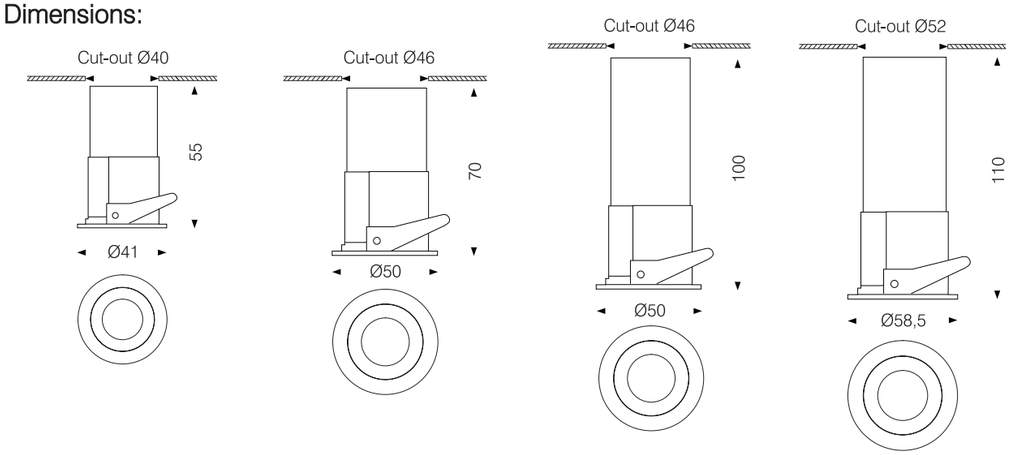

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 5000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Metal Grey

Reflector color

Matt White

Matt Black/ Shiny Black


Gloss Silver




RECESSED CEILING

Model	Y7510C	Y7515C	Y9525C
Power:	10W	15W	24W
Lumini-	750lm	1125lm	1800lm
Beam angle:		15°/ 24°/ 36°/ 55°	

Dimensions:

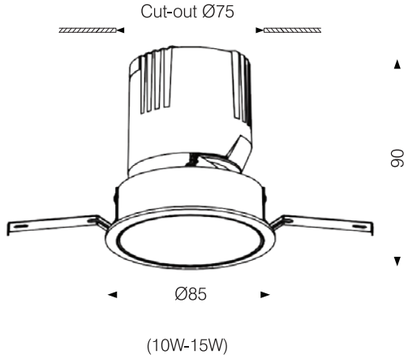

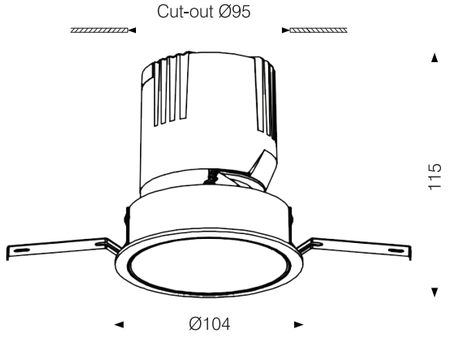

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Metal Grey

Reflector color

Matt White

Matt Black/ Shiny Black


Gloss Silver




RECESSED CEILING

Model	Y1235C	Y1455C
Power:	35W	55W
Lumini-	2450lm	3850lm
Beam angle:	15°/ 24°/ 36°/ 55°	

Dimensions:

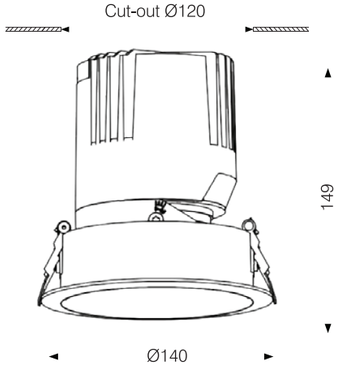

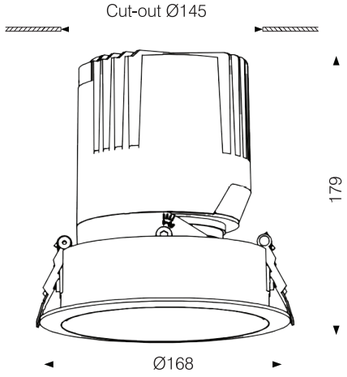

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tuable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee Dim, Bluetooth

Body color

Metal Grey

Reflector color

Matt White/ Shiny White

Matt Black/ Shiny Black


Gloss Silver




TRIMLESS CEILING

Model:	Y7510TC	Y7515TC	Y9524TC
Power:	10W	15W	24W
Luminious:	750lm	1125lm	1800lm
Beam angle:		15°/ 24°/ 36°/ 55°	

Dimensions:

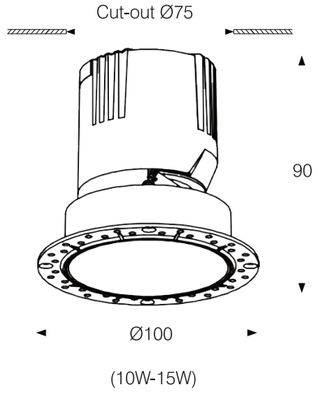

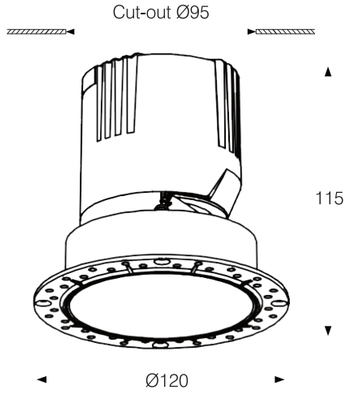

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Metal Grey

Reflector color

Matt White/ Shiny White

Matt Black/ Shiny Black


Gloss Silver




TRIMLESS CEILING

Model:	Y1235TC	Y1455TC
Power:	35W	55W
Luminious:	2450lm	3850lm
Beam angle:	15°/ 24°/ 36°/ 55°	

Dimensions:

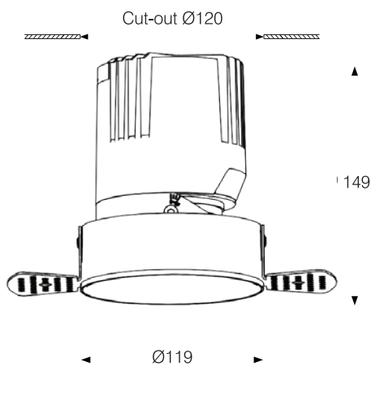

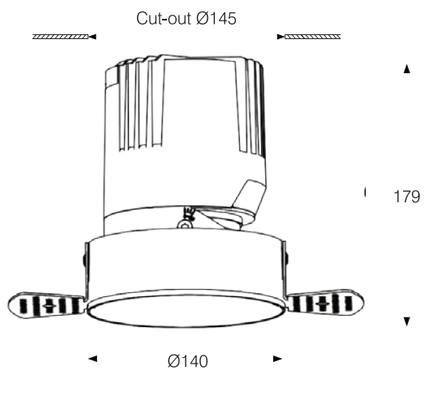

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee Dim, Bluetooth

Body color

Metal Grey

Reflector color

Matt White/ Shiny White


Matt Black/ Shiny Black

Gloss Silver



RECESSED CEILING

Model:	Y7510S	Y7515S	Y9524S
Power:	10W	15W	24W
Lumini-	750lm	1250lm	1800lm
Beam angle:		15°/ 24°/ 36°/ 55°	
Dimensions:			

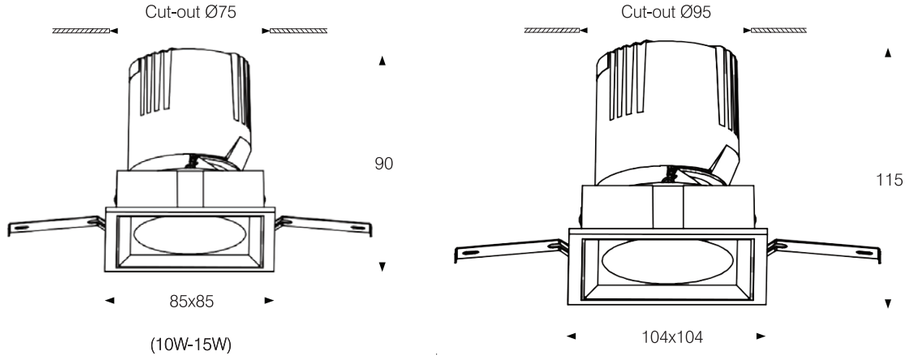

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Metal Grey

Reflector color

Matt White/ Shiny White


Matt Black/ Shiny Black

Gloss Silver



RECESSED CEILING

Model:	Y1235S	Y1455S
Power:	35W	55W
Lumini-	2450lm	3850lm
Beam angle:	15°/ 24°/ 36°/ 55°	
Dimensions:		

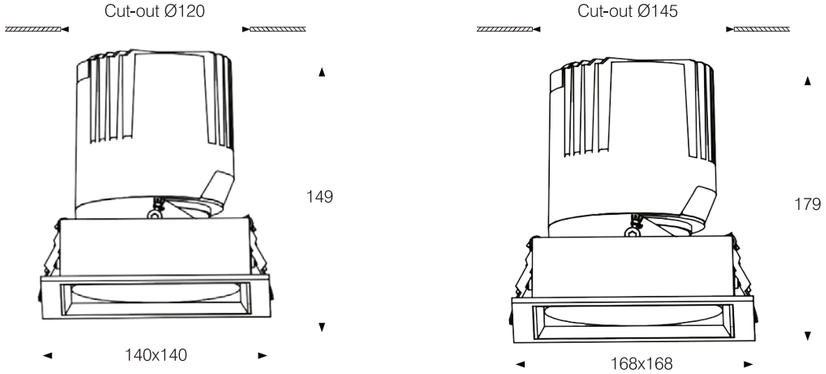

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Metal Grey

Reflector color

Matt White/ Shiny White

Matt Black/ Shiny Black


Gloss Silver




TRIMLESS CEILING

Model	Y1235TS	Y1455TS
Power:	35W	55W
Lumini-	2450lm	3850lm
Beam angle:	15°/ 24°/ 36°/ 55°	

Dimensions:

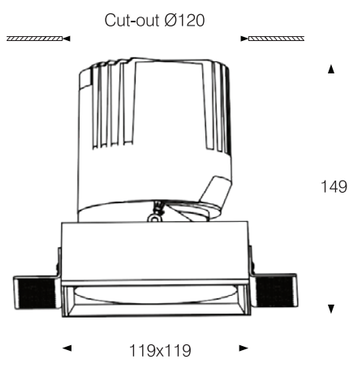

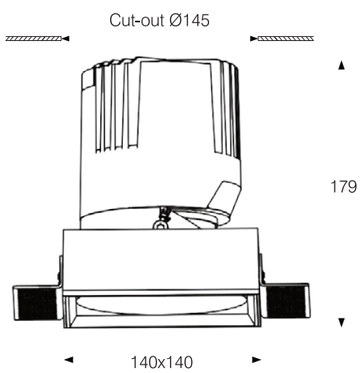

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Metal Grey

Reflector color

Matt White/ Shiny White

Matt Black/ Shiny Black


Gloss Silver




TRIMLESS CEILING

Model	Y7510TS	Y7515TS	Y9524TS
Power:	10W	15W	24W
Lumini-	750lm	1250lm	1800lm
Beam angle:	15°/ 24°/ 36°/ 55°		

Dimensions:

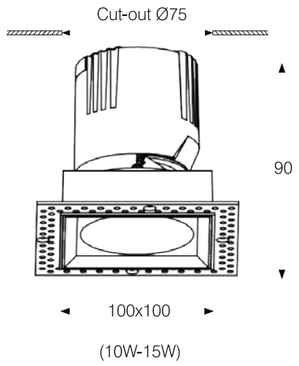

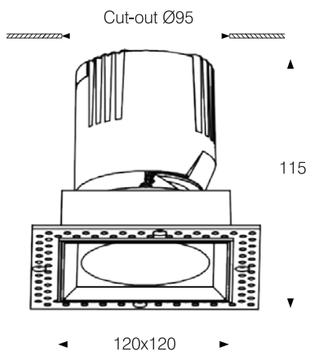

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



ZENITH TRIMLESS

New design with an edgeless structure beneath the ceiling surface, making the ceiling surface neater and enhancing aesthetics.



ZENITH

Body color

- Matt White
- Matt Black/ Pearl Black

Reflector color


- Matt White
- Matt Black/ Pearl Black




RECESSED CEILING

TRIMLESS CEILING

Model:	Z4506A	Z4509A	Z4506T	Z4509T
Power:	6W	9W	6W	9W
Luminious:	330lm	500lm	330lm	500lm
Beam angle:	15°/ 24°	50°	15°/ 24°	50°
Dimensions:				

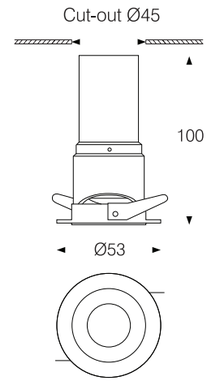

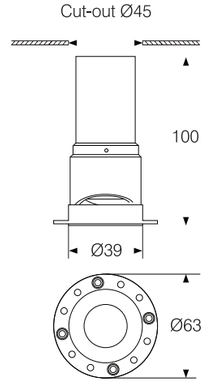

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

CARMAN





Carman is inspired of famous supercars which has Italia style.

- Compact design, flexible rotation angle of 355°
- Zoomable 15 °-50 °
- Using entirely monolithic aluminum, specially designed with many small holes in the lamp body to help dissipate heat well. This increases stability and maximizes lamp lifespanoomable 15 °-50 °
- The delicate design increases aesthetics, creating soft lighting effects suitable for artistic lighting spaces



Body color

- Matt Black
- Matt White

Reflector color


- Matt White
- Matt Black



ZOOMABLE RECESSED CEILING

Model:	C4510ZA	C5515ZA	C6525ZA	C7535ZA
Power:	10W	15W	25W	35W
Luminious:	700lm	1050lm	1750lm	2450lm
Beam angle:	Zoomable 15°- 50°			

Dimensions:

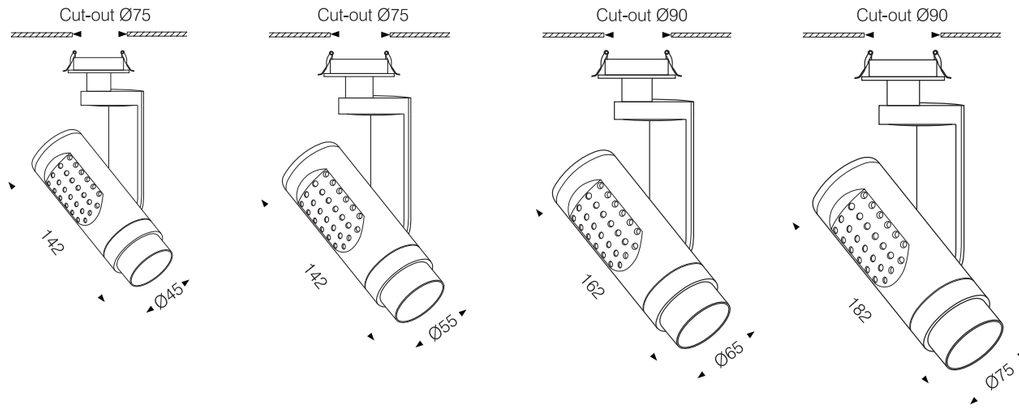

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black



ZOOMABLE SURFACE

Model:	C4508ZS	C5515ZS	C6525ZS	C7535ZS
Power:	8W	15W	25W	35W
Luminious:	560lm	1050lm	1750lm	2450lm
Beam angle:	Zoomable 15°- 50°			
Dimensions:				

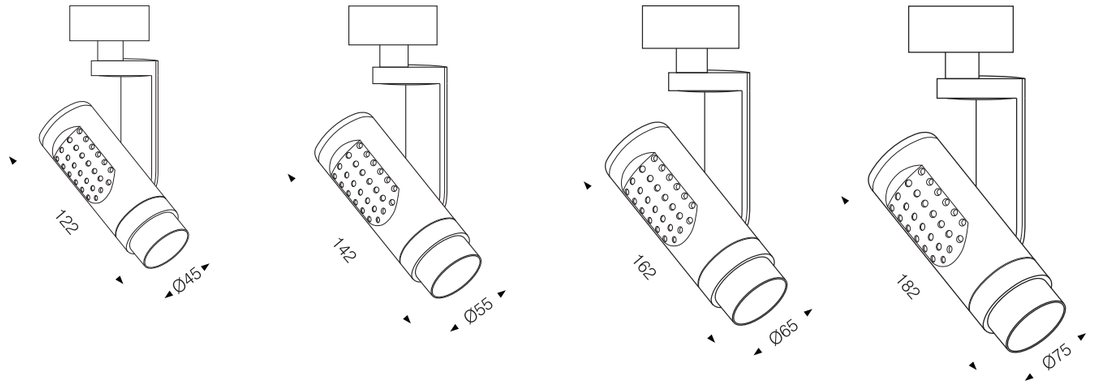

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black



ZOOMABLE TRACK LIGHT

Model:	C4510Z	C5515Z	C6525Z	C7535Z
Power:	10W	15W	25W	35W
Luminious:	700lm	1050lm	1750lm	2450lm
Beam angle:	Zoomable 15°- 50°			
Dimensions:				

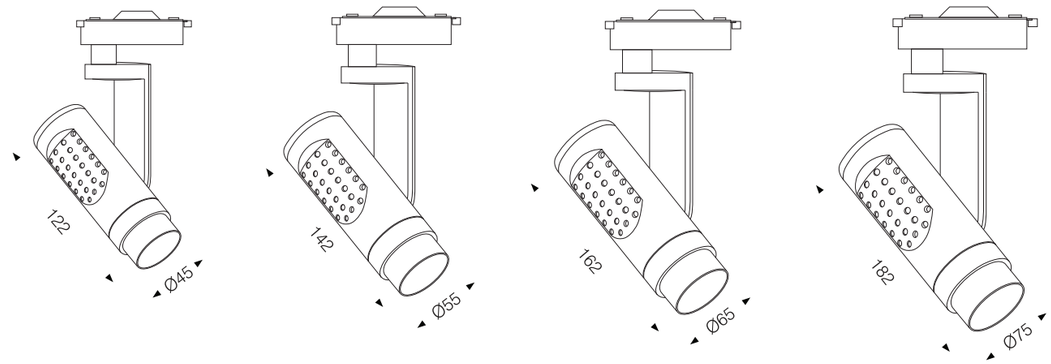

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortektv
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Option	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

Body color

- Matt Black
- Matt White

Reflector color


- Matt White
- Matt Black



SURFACE

Model:	L5310S	L6320S
Power:	10W	20W
Luminious:	750lm	1500lm
Beam angle:	15°/ 24°/ 36°	

Dimensions:

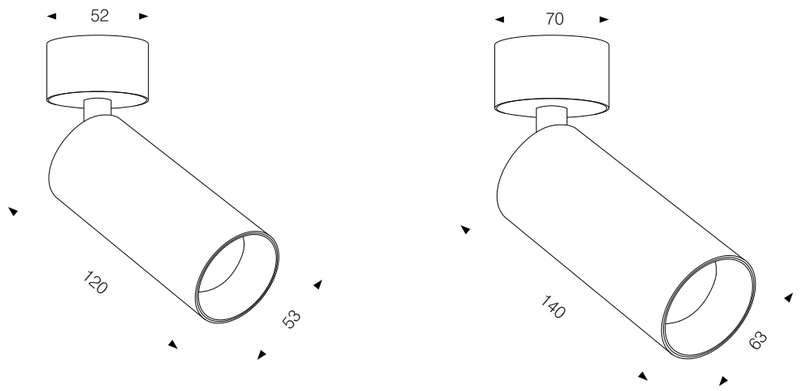

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

SURFACE MOUNTED

- Surface-mounted lights are convenient for installation
- Good glare control brings comfort to the space

Body color

- Matt White
- Matt Black

Reflector color


- Matt Black
- Matt White



SURFACE

Model:	D7610W	D9120W	D12830W
Power:	10W	20W	30W
Luminious:	700lm	1400lm	2100lm
Beam angle:		15°/ 24°/ 36°	

Dimensions:

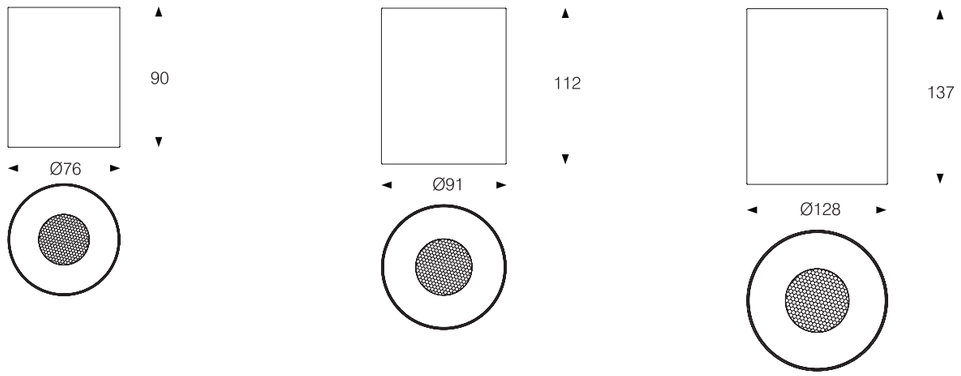

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Matt White

Matt Black

Reflector color

Matt White


Matt White



SURFACE

Model:	D9515-IP65	D9520-IP65
Power:	15W	20W
Luminious:	1150lm	1520lm
Beam angle:	15°/ 24°/ 36°	

Dimensions:

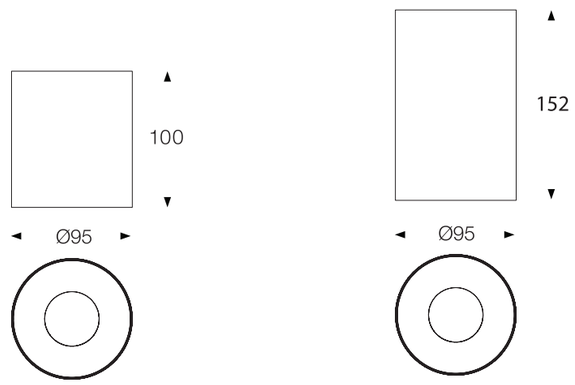

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	65
Lifetime:	>50.000h
Control:	On/Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Matt White

Matt Black

Reflector color

Matt Black

Matt White




30° rotatable right or left

SURFACE

Model:	D6405A	D6407A	D7409A	D8412A
Power:	5W	7W	9W	12W
Luminious:	375lm	525lm	675lm	900lm
Beam angle:	15°/ 24°/ 38°			

Dimensions:

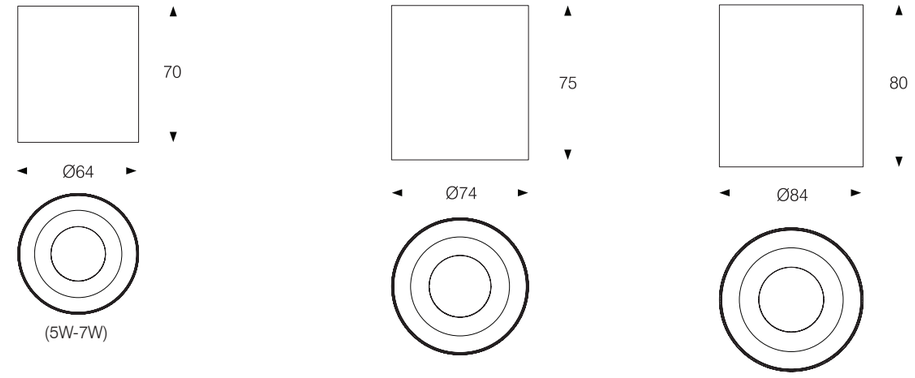


General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

STEP LIGHT


Body color

- Matt White
- Matt Black

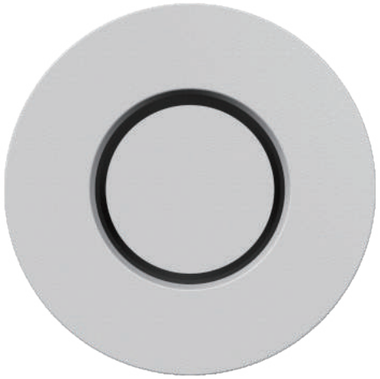

Model:	B3801S
Power:	1W
Luminious:	40lm

Dimensions:

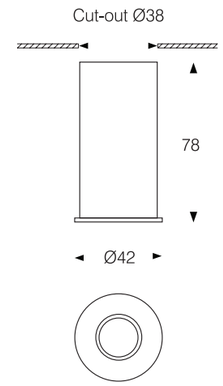

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
CCT:	2700K/ 3000K/ 4000K
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V

STEP LIGHT

Body color


Matt White

Matt Black



Model:	SR4501	SR4503
Power:	1W	3W
Luminious:	50lm	120lm

Dimensions:

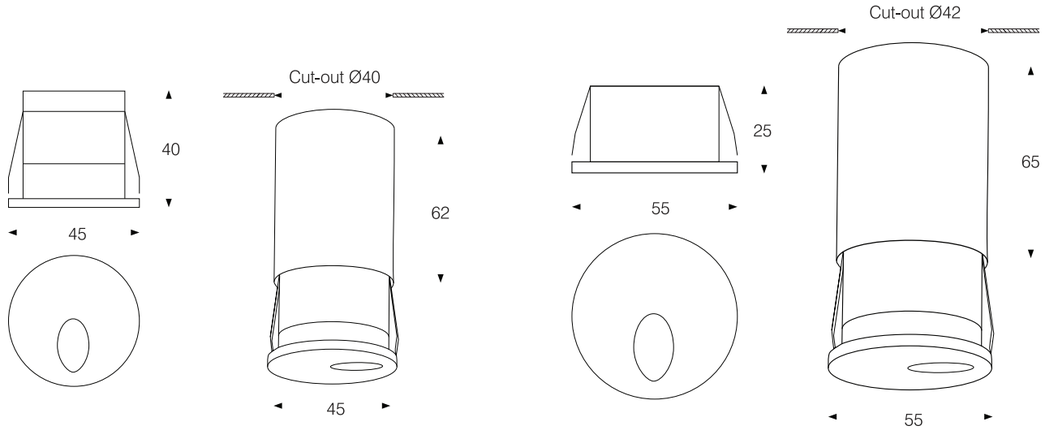

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
CCT:	2700K/ 3000K/ 4000K
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V

STEP LIGHT

Body color


Matt White

Matt Black



Model:	ST8001
Power:	1W
Luminious:	50lm

Dimensions:

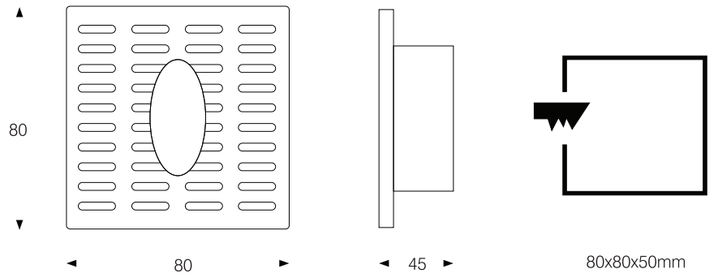

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
CCT:	2700K/ 3000K/ 4000K
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V



STEP LIGHT


Body color


- Matt Black
- Matt White
- Metal Grey




Model:	B9001S	B9003S
Power:	1W	3W
Luminious:	50lm	150lm

Dimensions:

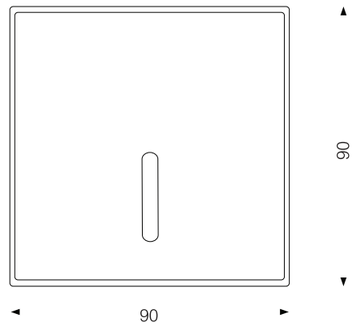



General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
CCT:	2700K/ 3000K/ 4000K
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V

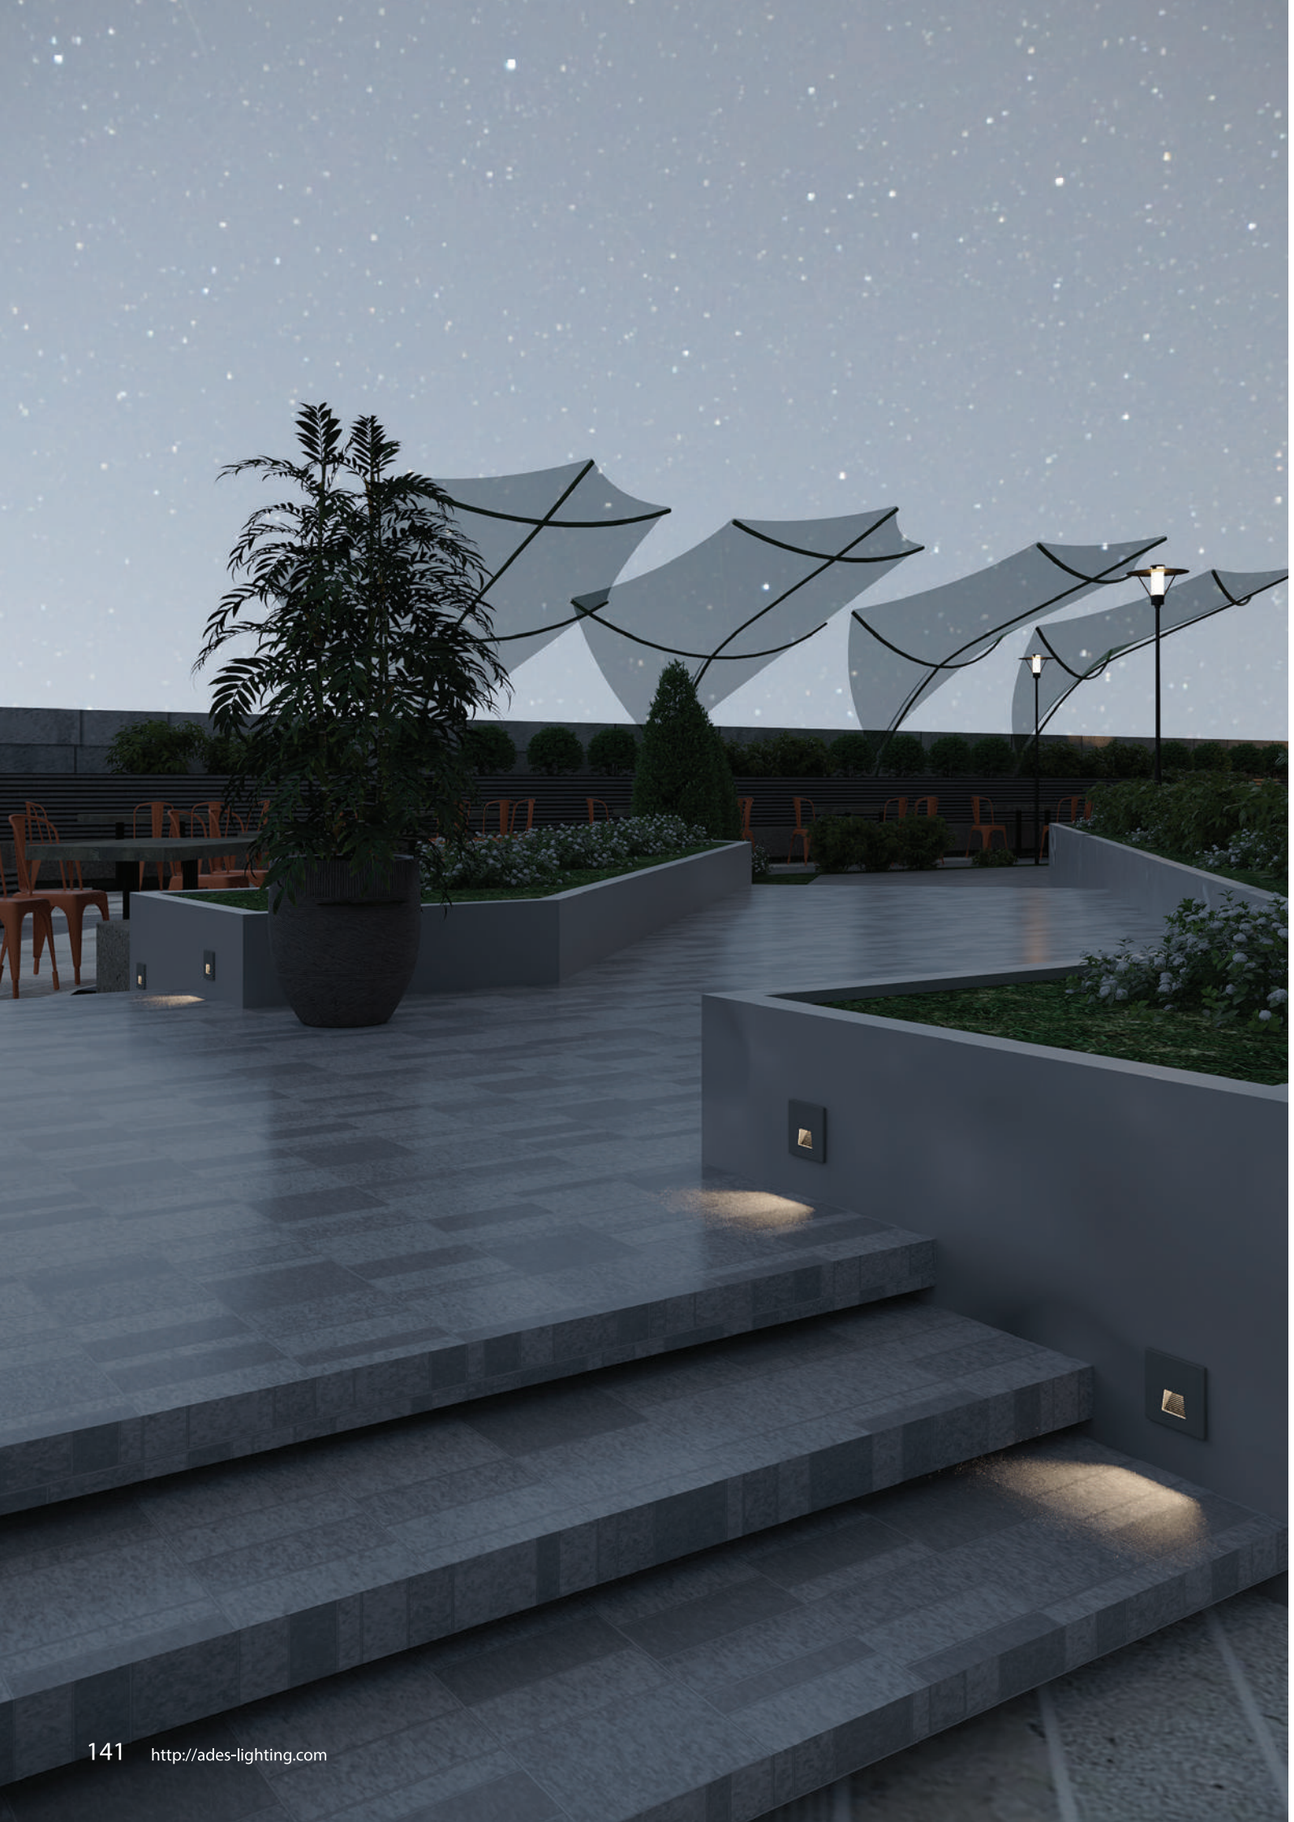

STEP LIGHT

Body color


- Matt Grey
- Matt White
- Matt Black






Model:	S9003-65A	S9003-65B
Power:	3W	3W

Dimensions:

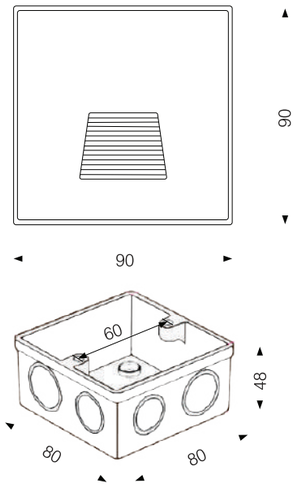

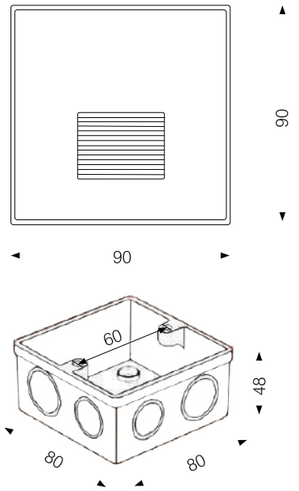

General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
CCT:	2700K/ 3000K/ 4000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V

Body color


- Matt White
- Matt Black






Model:	S11703R	S11706R	S11803C	S11806C
Power:	3W	6W	3W	6W
Beam angle:	15°/ 24°/ 36°			

Dimensions:



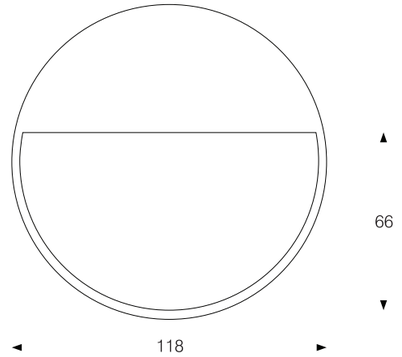


General specifications

LED:	Osram/ Cree
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V

STEP LIGHT


Body color


- Matt White
- Matt Black

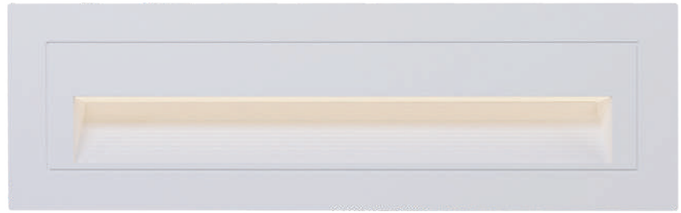



Model:	S10503-65	S21006-65
Power:	3W	6W

Dimensions:

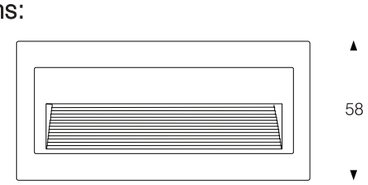

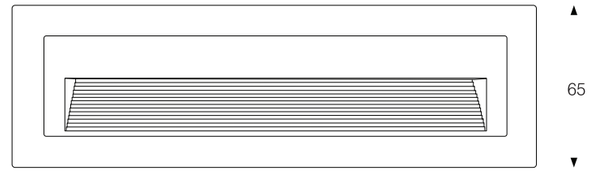





General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
CCT:	2700K/ 3000K/ 4000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V

STEP LIGHT

Body color


Matt White

Matt Black



Model:	S18503-65
Power:	3W

Dimensions:

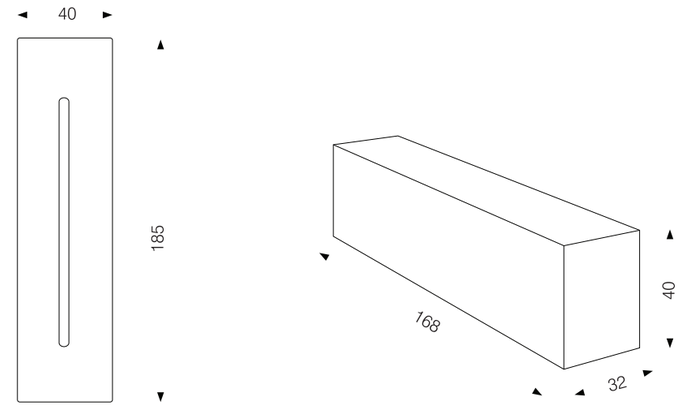

General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
CCT:	2700K/ 3000K/ 4000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V

Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

In the dark,
there will always be a ray of dawn for you.

STEP LIGHT


Body color

Matt White

Matt Black








Model:	S20003-20	S11003-20
Power:	3W	3W

Dimensions:

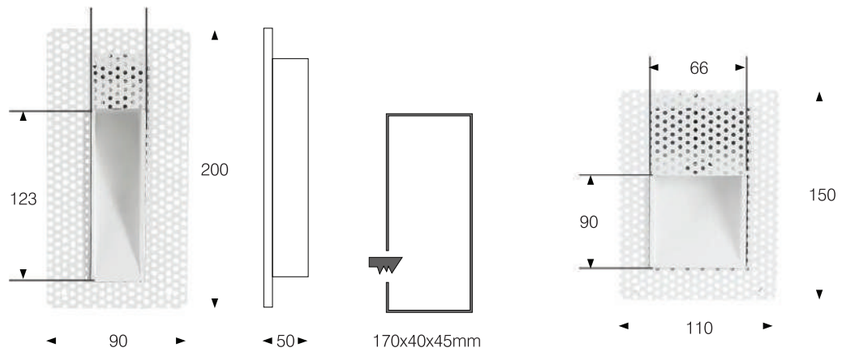

General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
CCT:	2700K/ 3000K/ 4000K
IP rating:	20/ 65
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V




Body color

- Matt White
- Matt Black




Model:	S7501-03RL
Power:	3W

Dimensions:

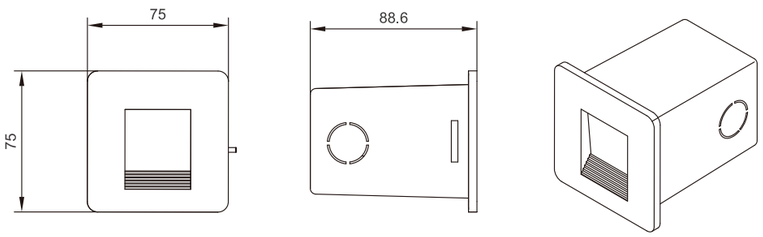

General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
CCT:	2700K/ 3000K/ 4000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V

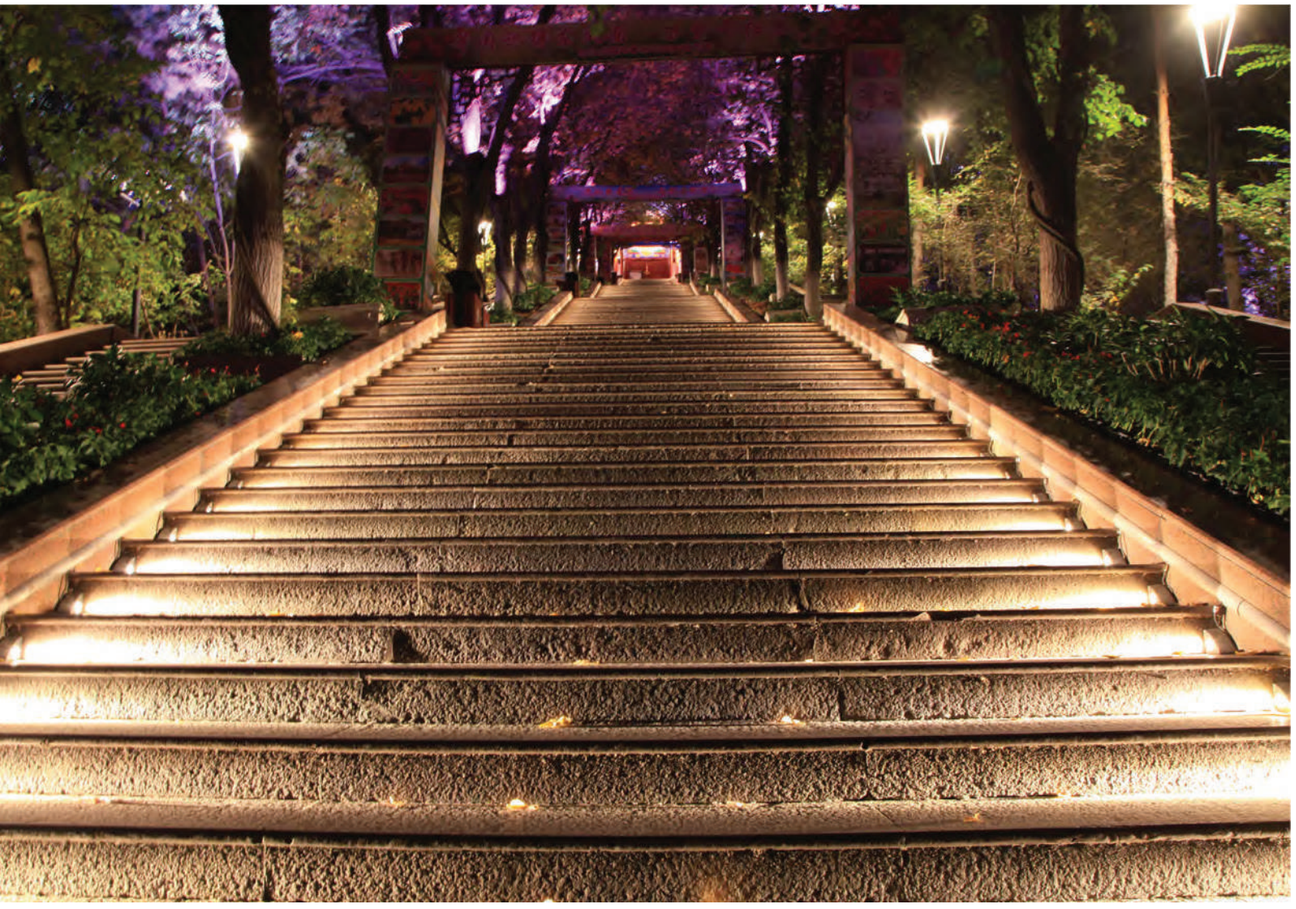


Body color

- Matt White
- Matt Black



Model:	S7001-03RL
Power:	3W

Dimensions:

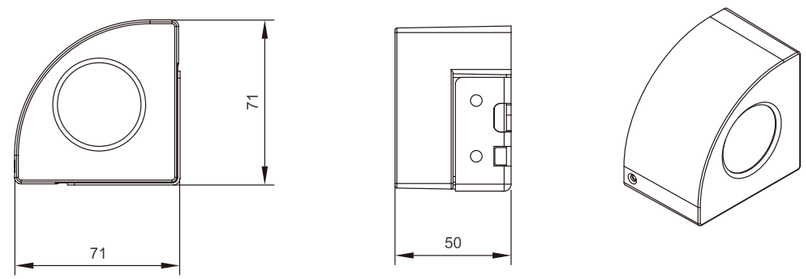

General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
CCT:	2700K/ 3000K/ 4000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V






PC cover
- Milkey white
- Black
- Acrylic matte

Surface color
- Matt Black
- Matt White

Model:	AB5035T - L2000	AB5035T - R300	AB5035T - R500	AB5035T - R700

Dimensions:

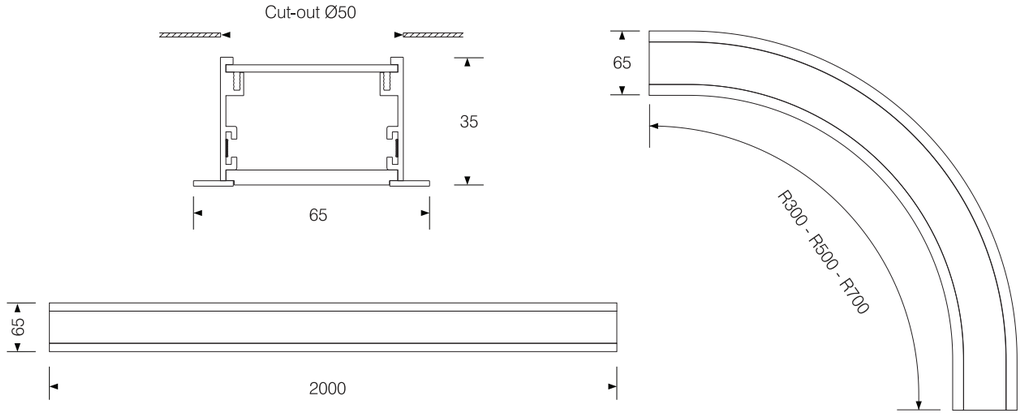

ALUMINUM BLENDING




PC cover
- Milkey white
- Black
- Acrylic matte

Surface color
- Matt Black
- Matt White

Model:	AB5035U - L2000	AB5035U - R300	AB5035U - R500	AB5035U - R700

Dimensions:

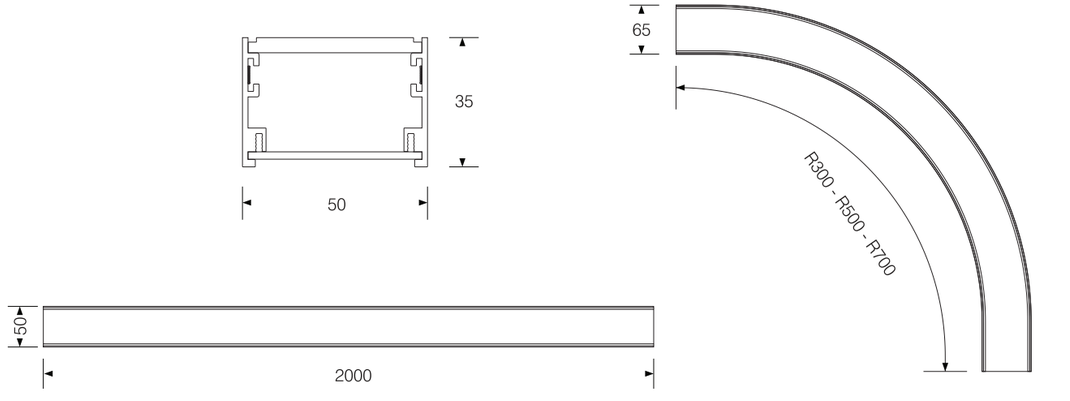


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

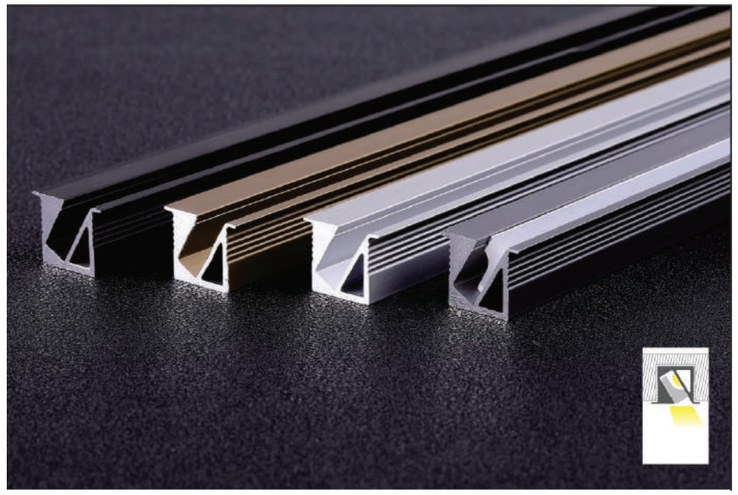

Model: TN1210

Dimensions:

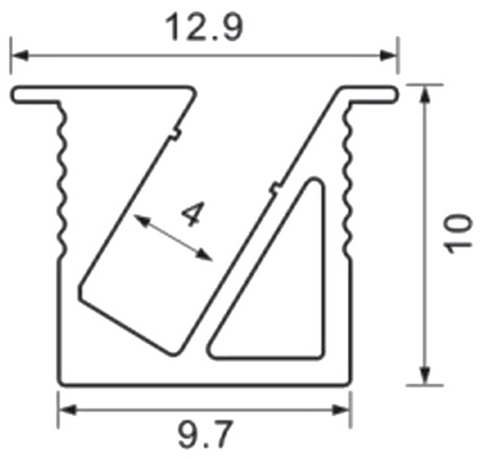


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

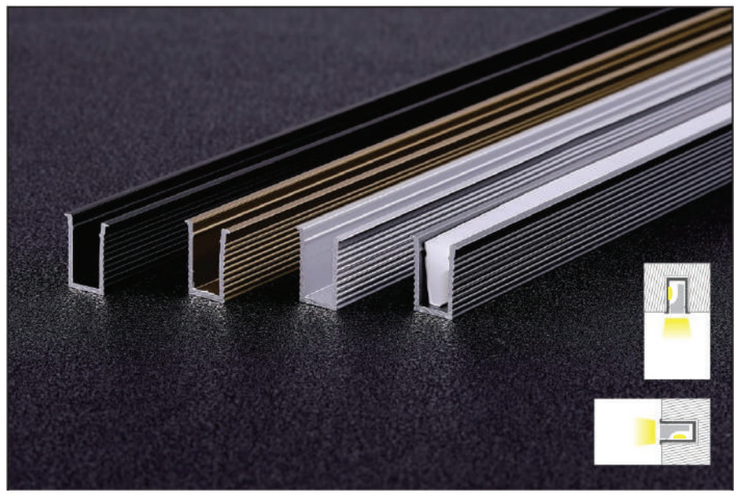

Model: TN0709

Dimensions:

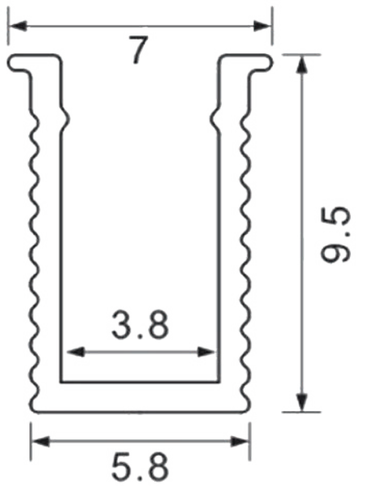


Surface color
- Matt Black
- Matt White

PC cover
- Milkey white
- Black
- Acrylic matte




Model: ATG3010

Dimensions:

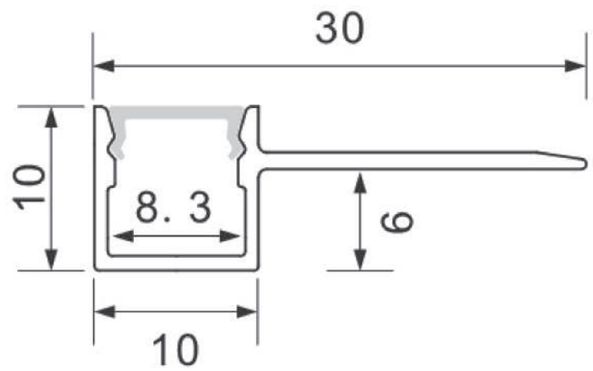


Surface color
- Matt Black
- Matt White

PC cover
- Milkey white
- Black
- Acrylic matte

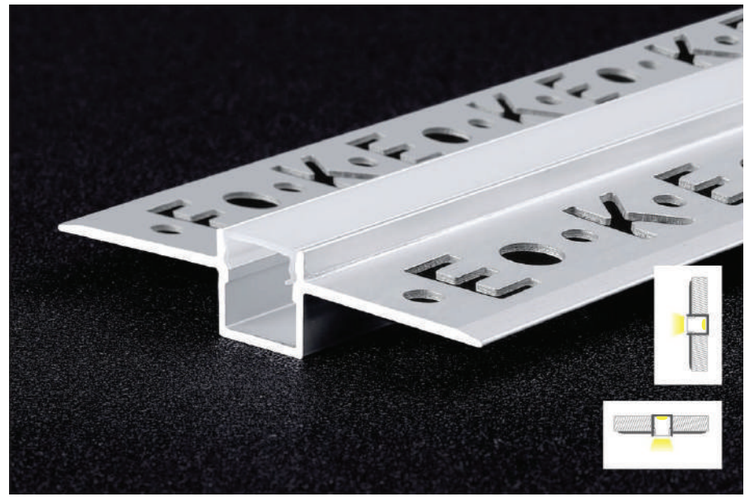

Model: AT5010

Dimensions:

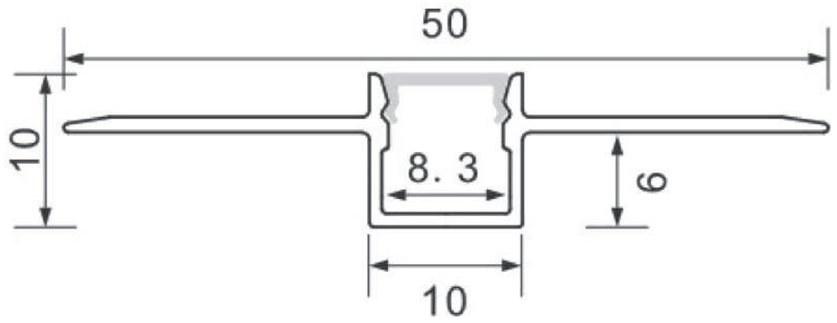


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

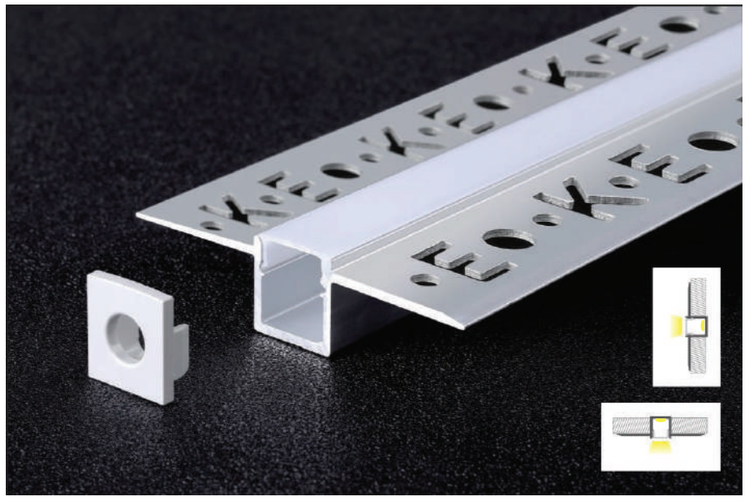

Model: AT5213

Dimensions:

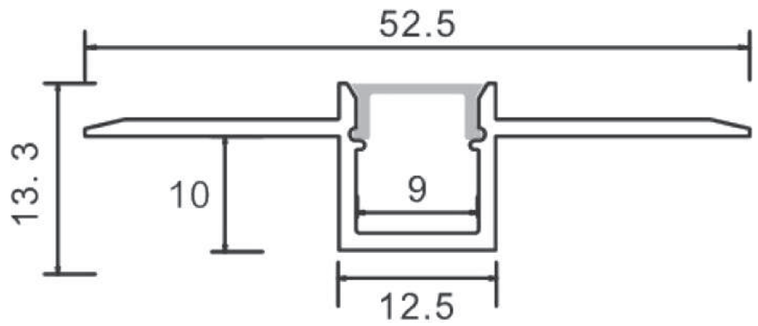


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

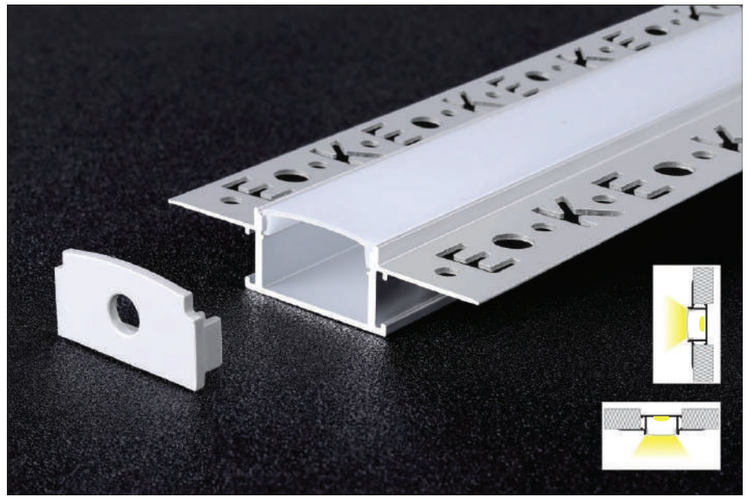


Model: AT6114

Dimensions:

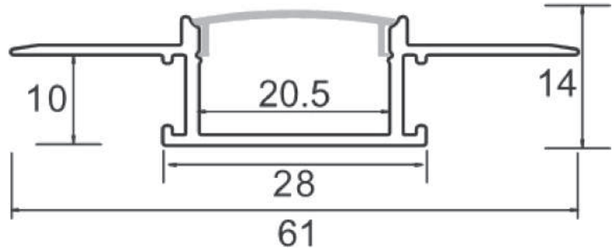


Surface color
- Matt Black
- Matt White

PC cover
- Milkey white
- Black
- Acrylic matte

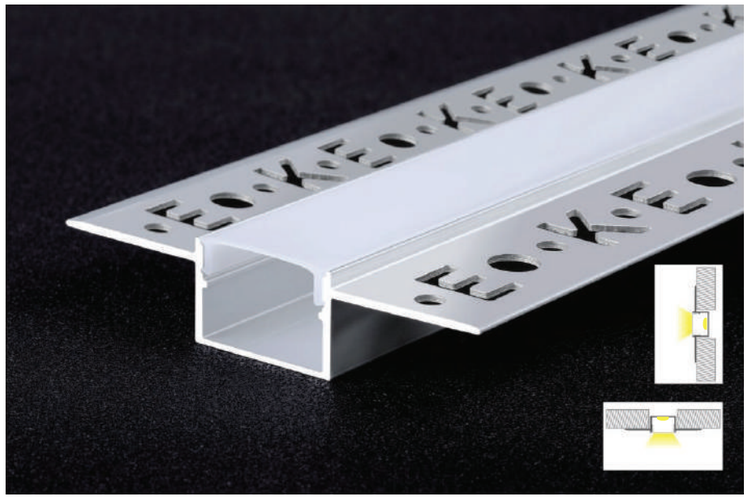


Model: AT6013

Dimensions:

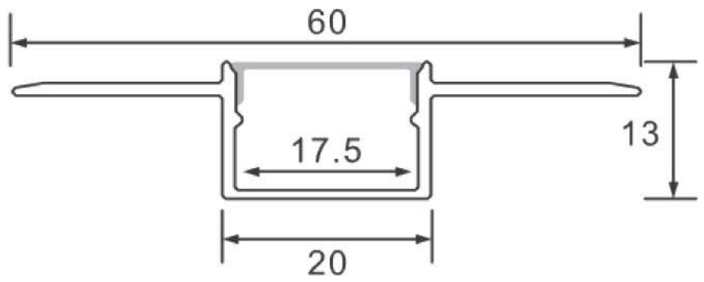


Surface color
- Matt Black
- Matt White

PC cover
- Milkey white
- Black
- Acrylic matte

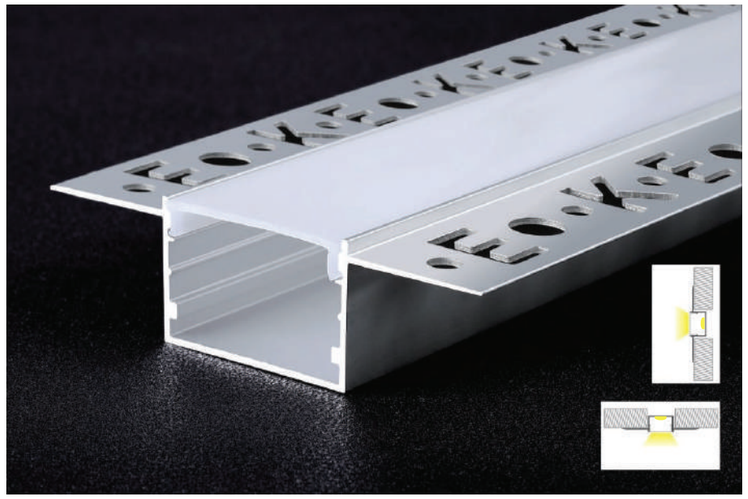

Model: AT7020

Dimensions:

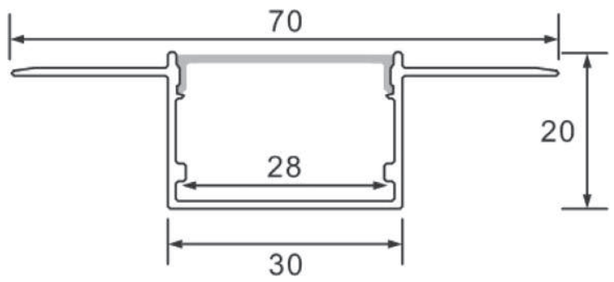


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

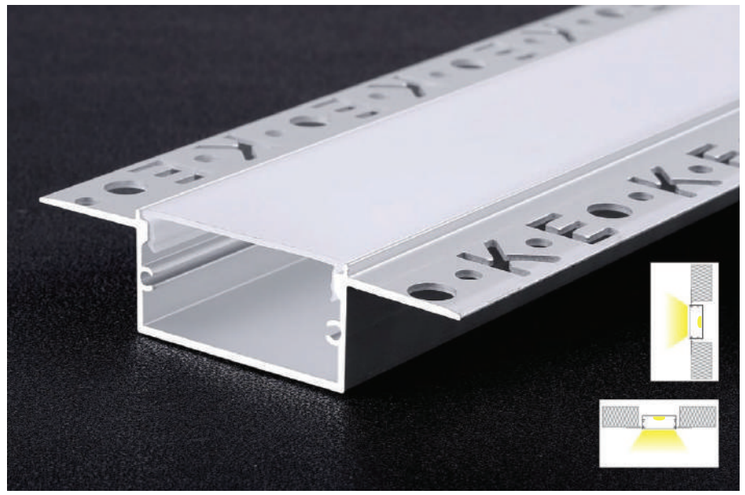

Model: AT8020

Dimensions:

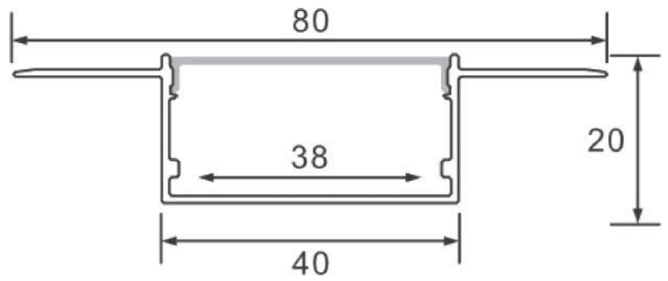


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

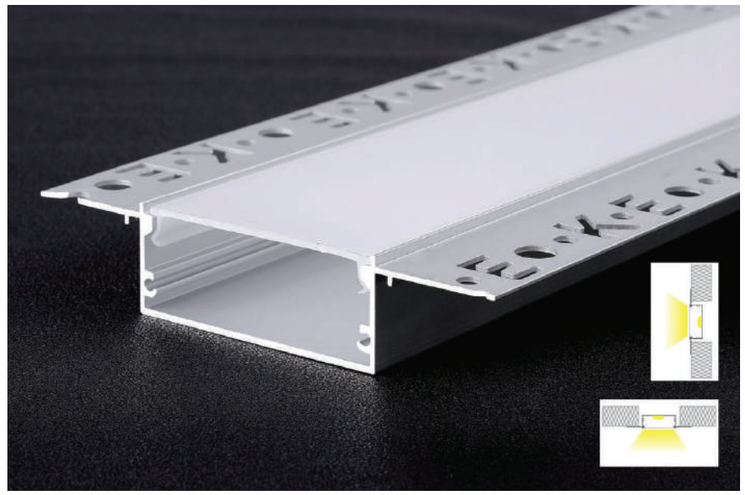

Model: AT9620

Dimensions:

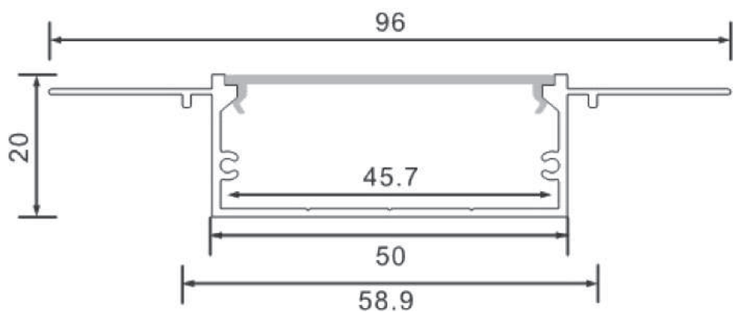


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

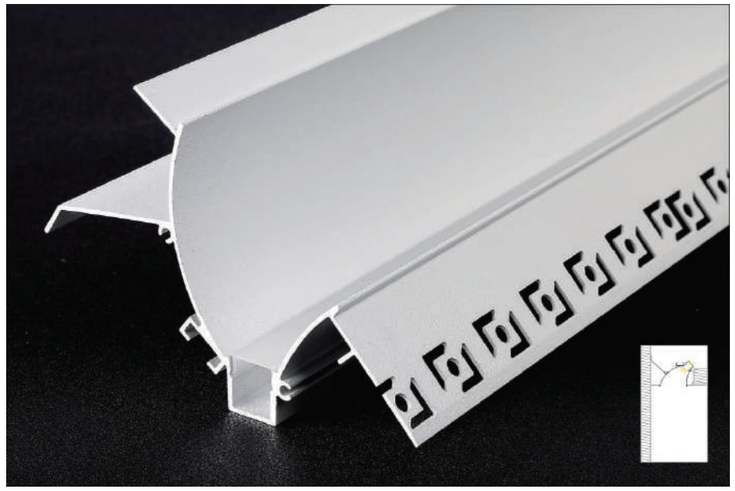

Model: HG6850

Dimensions:

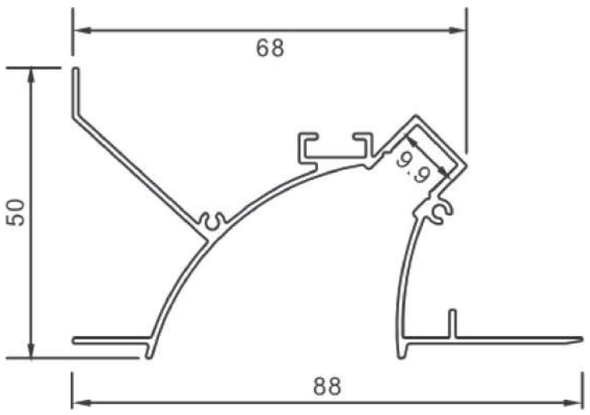


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

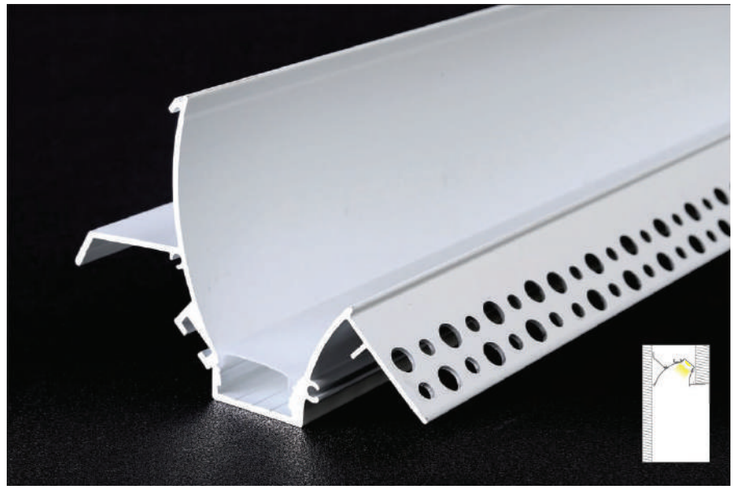

Model: HG7158

Dimensions:

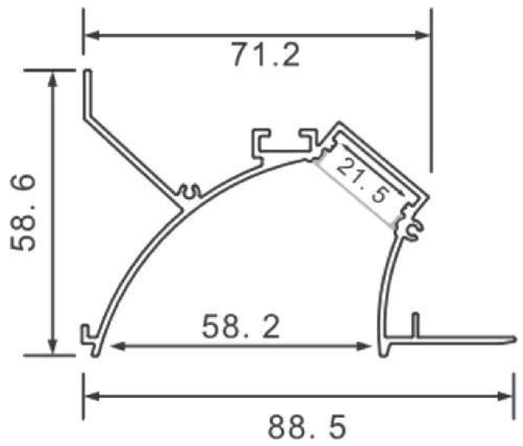


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

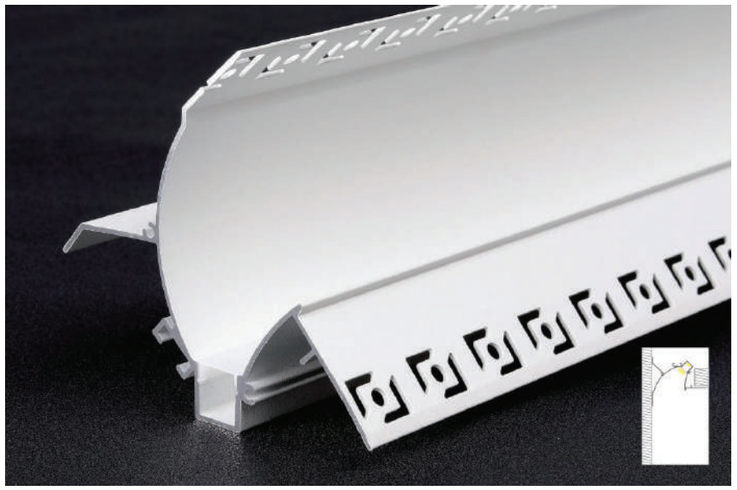

Model: HG5870

Dimensions:

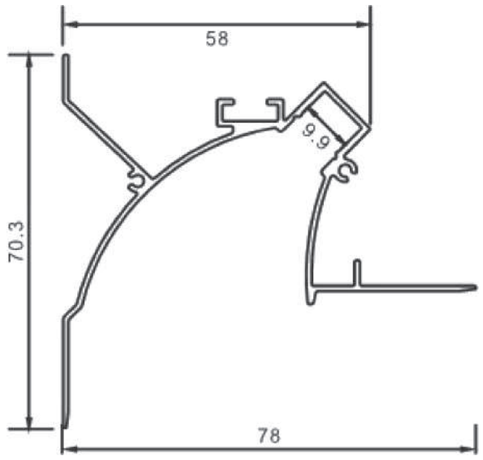


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

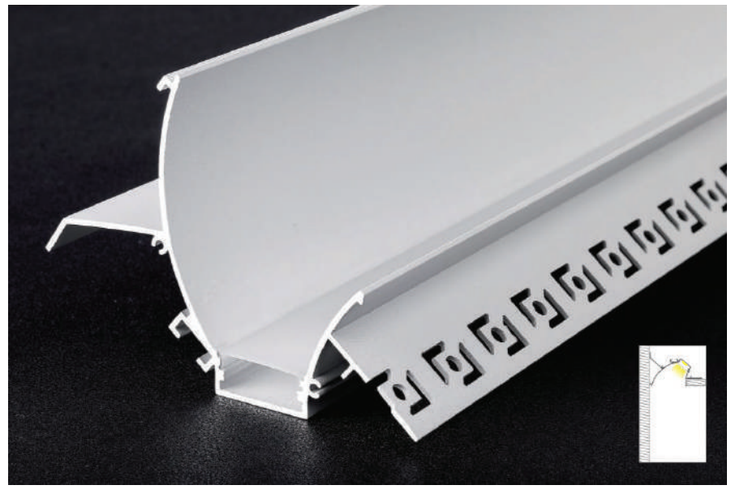

Model: HG7190

Dimensions:

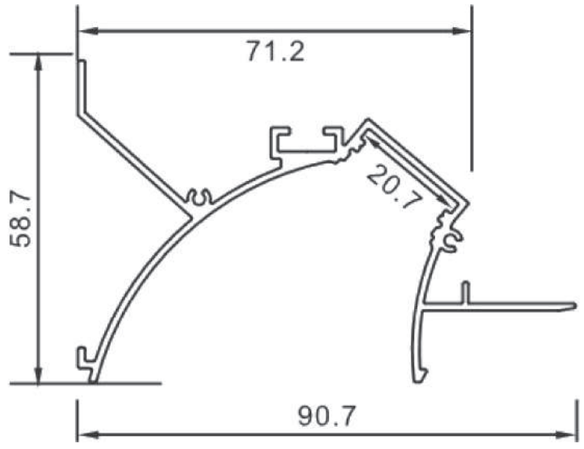


Surface color

- Silver
- Black
- White Anodized


PC cover

- Milkey white
- Black
- Acrylic matte

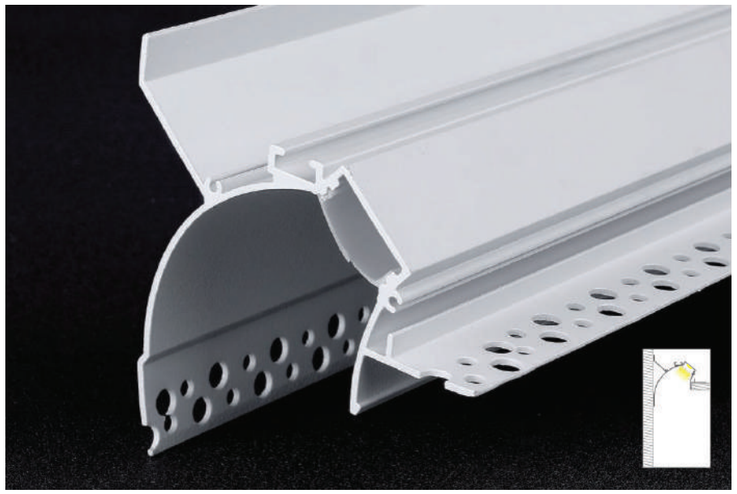

Model: HG7187

Dimensions:

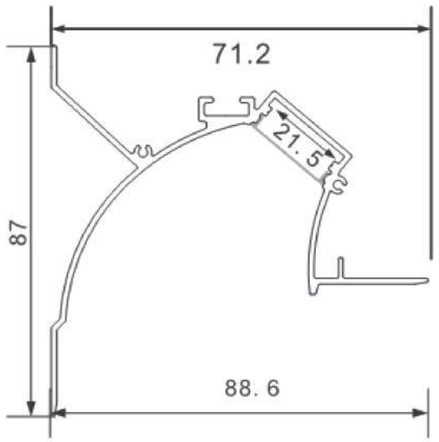


Surface color

- Silver
- Black
- White Anodized


PC cover

- Milkey white
- Black
- Acrylic matte

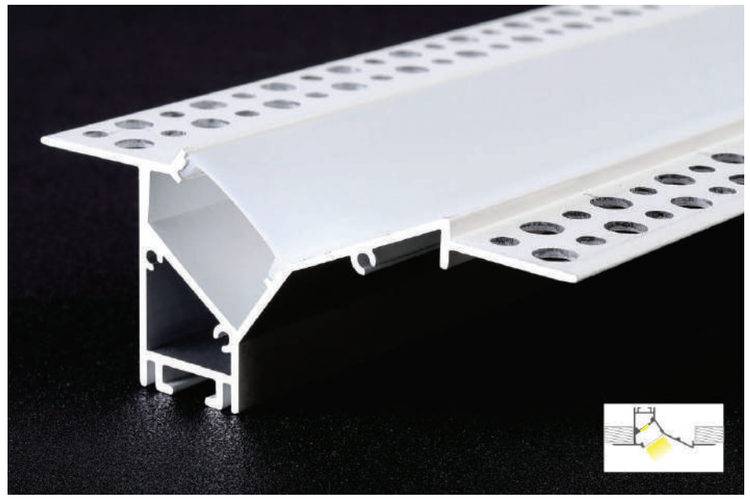

Model: HG5538

Dimensions:

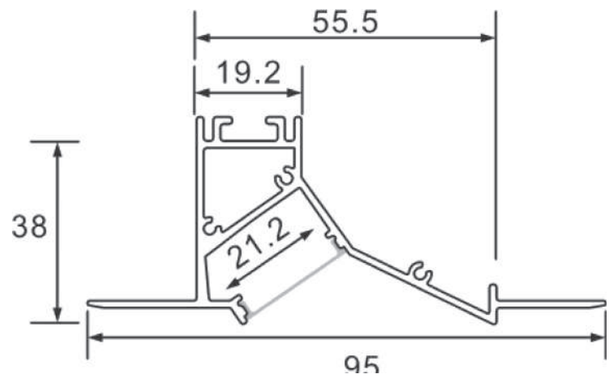


Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte

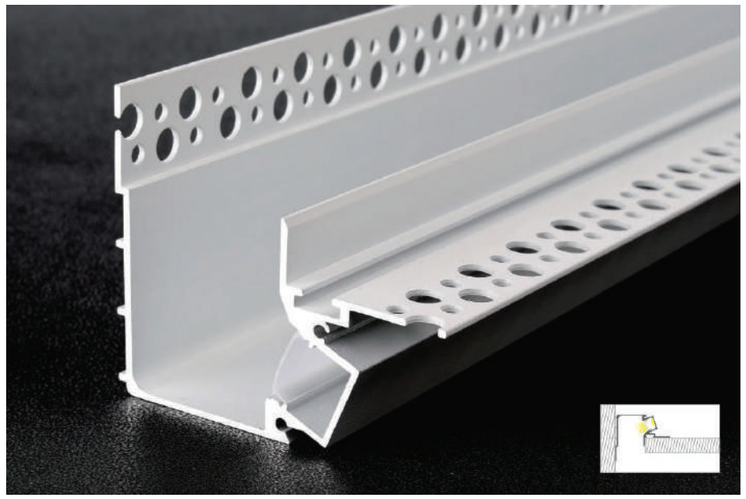

Model: HG7563

Dimensions:

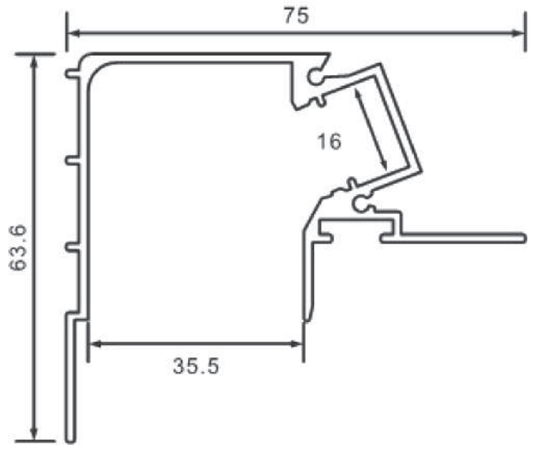

Surface color

- Matt Black
- Matt White


PC cover

- Milkey white
- Black
- Acrylic matte



Model: HG9758


Dimensions:

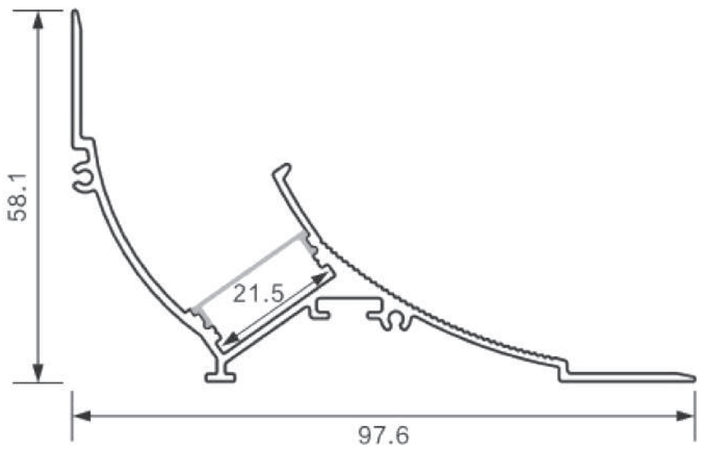




ART TRACK LIGHT


- Spot shaping/ Zoomable/ Projection/ Smart control
- Track Support



Three-line track




Four-line track




Six-line track

- Installation effect



- Spot effect

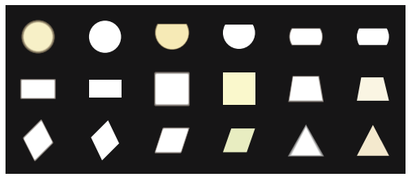

Control support



Support 1-10V. DMX, DALI, ZGEBI, and other mainstream control. Can also be connected with Huawei, Tuya, Xiaomi, Tmall Elf, Amazon, Google, and other smart AI control systems.

Projection support



Human Projection | Landscape physical projection | Logo icon projection | Marketing projection | Food projection

A-SERIES





Diffuser



ND filter

Color filter



CPL filter






UV filter

GND filter

Industrial Grade Optical Filter

It can match a variety of industrial-grade optical filters and support the customization of special narrowband and ultra narrowband optical filters. Some filter functions can be superimposed, such as HD UV+color filter, HD UV+soft filter, amongst others.

Color filter



The luminous color of the lamp can be adjusted according to your needs.

ND filter



With electronic dimming, the small-angle illumination can be reduced to less than 75LUX, which is generally used for authentic lighting.

UV filter



It can effectively filter UV rays in LED lamps and lanterns, thus protecting the illuminated object. It delivers superior performance in silk products lighting and cultural relics lighting.

CPL filter



It can eliminate the reflection of the object's surface so that the object in a high luminosity environment can also display its original appearance.

GND filter



GND filter are used to alter the light ratio into the lens. For example, in illuminating the oblique side of the square position of the object, the use of gradient filters allows the even and constant illumination of the object.

Body color

- Matt Black
- Matt White


Reflector color


- Matt White
- Matt Black





Model:	T6510A-4536	T6510B-4525
Power:	10W	10W
Luminious:	300-350lm	300-350lm
Beam angle:	Zoom 25°-36°	Zoom 15°-25°
Dimensions:		





General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

Body color

- Matt Black
- Matt White


Reflector color


- Matt White
- Matt Black





Model:	T7520A-7536	T7520A-7525
Power:	20W	20W
Lumini-	650-750lm	650-750lm
Beam angle:	zoom 20°-36°	zoom 15°-25°
Dimensions:		





General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

Body color

- Matt Black
- Matt White


Reflector color


- Matt White
- Matt Black





Model:	T8530A-7536	T8530A-7525
Power:	28W	28W
Luminious:	800-850lm	800-850lm
Beam angle:	Zoomable 20°-36°	Zoomable 15°-25°
Dimensions:		





General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color

- Matt Black
- Matt White


Reflector color


- Matt White
- Matt Black






Model:	T9540A-7536	T9540A-7525
Power:	37W	37W
Luminious:	1050-1200lm	1050-1200lm
Beam angle:	Zoomable 20°-35°	Zoomable 15°-25°
Dimensions:		





General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

Color filter



The luminous color of the lamp can be adjusted according to your needs.

ND filter



With electronic dimming, the small-angle illumination can be reduced to less than 75LUX, which is generally used for authentic lighting.

UV filter



It can effectively filter UV rays in LED lamps and lanterns, thus protecting the illuminated object. It delivers superior performance in silk products lighting and cultural relics lighting.

CPL filter



It can eliminate the reflection of the object's surface so that the object in a high luminosity environment can also display its original appearance.

GND filter



GND filter are used to alter the light ratio into the lens. For example, in illuminating the oblique side of the square position of the object, the use of gradient filters allows the even and constant illumination of the object.



Color filter



Diffuser



ND filter

CPL filter



UV filter

GND filter

Industrial Grade Optical Filter

It can match a variety of industrial-grade optical filters and support the customization of special narrowband and ultra narrowband optical filters. Some filter functions can be superimposed, such as HD UV+color filter, HD UV+soft filter, amongst others.

ART TRACK LIGHT

Body color

- Matt Black
- Matt White


Reflector color


- Matt White
- Matt Black





Model:	T6510B-3635	T6510B-3645
Power:	10W	10W
Luminious:	300-350lm	300-350lm
Beam angle:	Zoomable 20°-35°	Zoomable 25°-45°
Dimensions:		





General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Options:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track/ 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color

- Matt Black
- Matt White


Reflector color


- Matt White
- Matt Black





Model:	T7520B-6025	T7520B-6036
Power:	20W	20W
Luminious:	650-750lm	650-750lm
Beam angle:	Zoomable 15°-25°	Zoomable 20°-36°
Dimensions:		





General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color

- Matt Black
- Matt White

Reflector color


- Matt White
- Matt Black






Model:	T8530B-6025	T8530B-6036
Power:	28W	28W
Luminious:	850-950lm	850-950lm
Beam angle:	Zoomable 15°-25°	Zoomable 20°-36°

Dimensions:

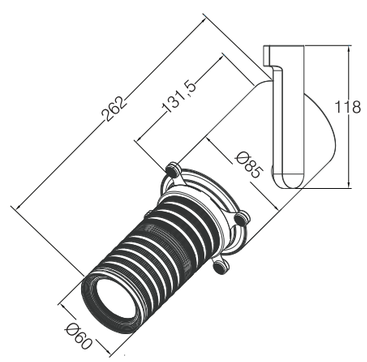

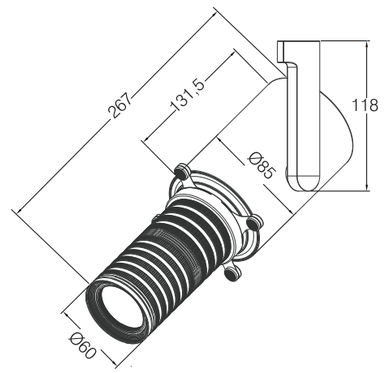

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color

- Matt Black
- Matt White

Reflector color


- Matt White
- Matt Black






Model:	T9540B-6025	T9540B-6036
Power:	37W	37W
Luminious:	1050-1200lm	1050-1200lm
Beam angle:	Zoomable 15°-25°	Zoomable 20°-36°

Dimensions:

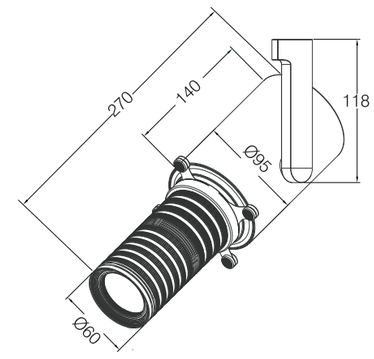

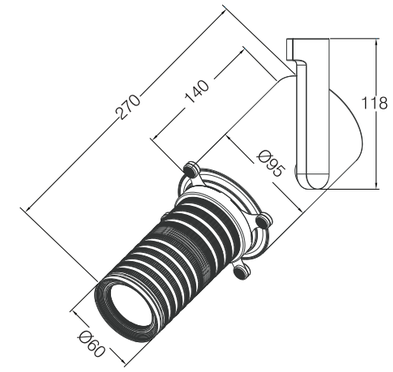

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

C-SERIES







ND filter



Diffuser



Color filter

Industrial Grade Optical Filter

It can match a variety of industrial-grade optical filters and support the customization of special narrowband and ultra narrowband optical filters. Some filter functions can be superimposed, such as HD UV+color filter, HD UV+soft filter, amongst others.

ND filter



With electronic dimming, the small-angle illumination can be reduced to less than 75LUX, which is generally used for authentic lighting.

UV filter



It can effectively filter UV rays in LED lamps and lanterns, thus protecting the illuminated object. It delivers superior performance in silk products lighting and cultural relics lighting.

GND filter




GND filter are used to alter the light ratio into the lens. For example, in illuminating the oblique side of the square position of the object, the use of gradient filters allows the even and constant illumination of the object.

CPL filter



It can eliminate the reflection of the CPL filter so that the object in a high luminosity environment can also display its original appearance.

Color filter

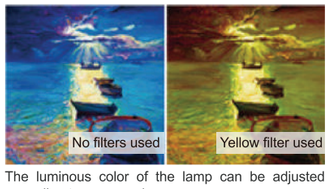

The luminous color of the lamp can be adjusted according to your needs.




CPL filter



UV filter

GND filter

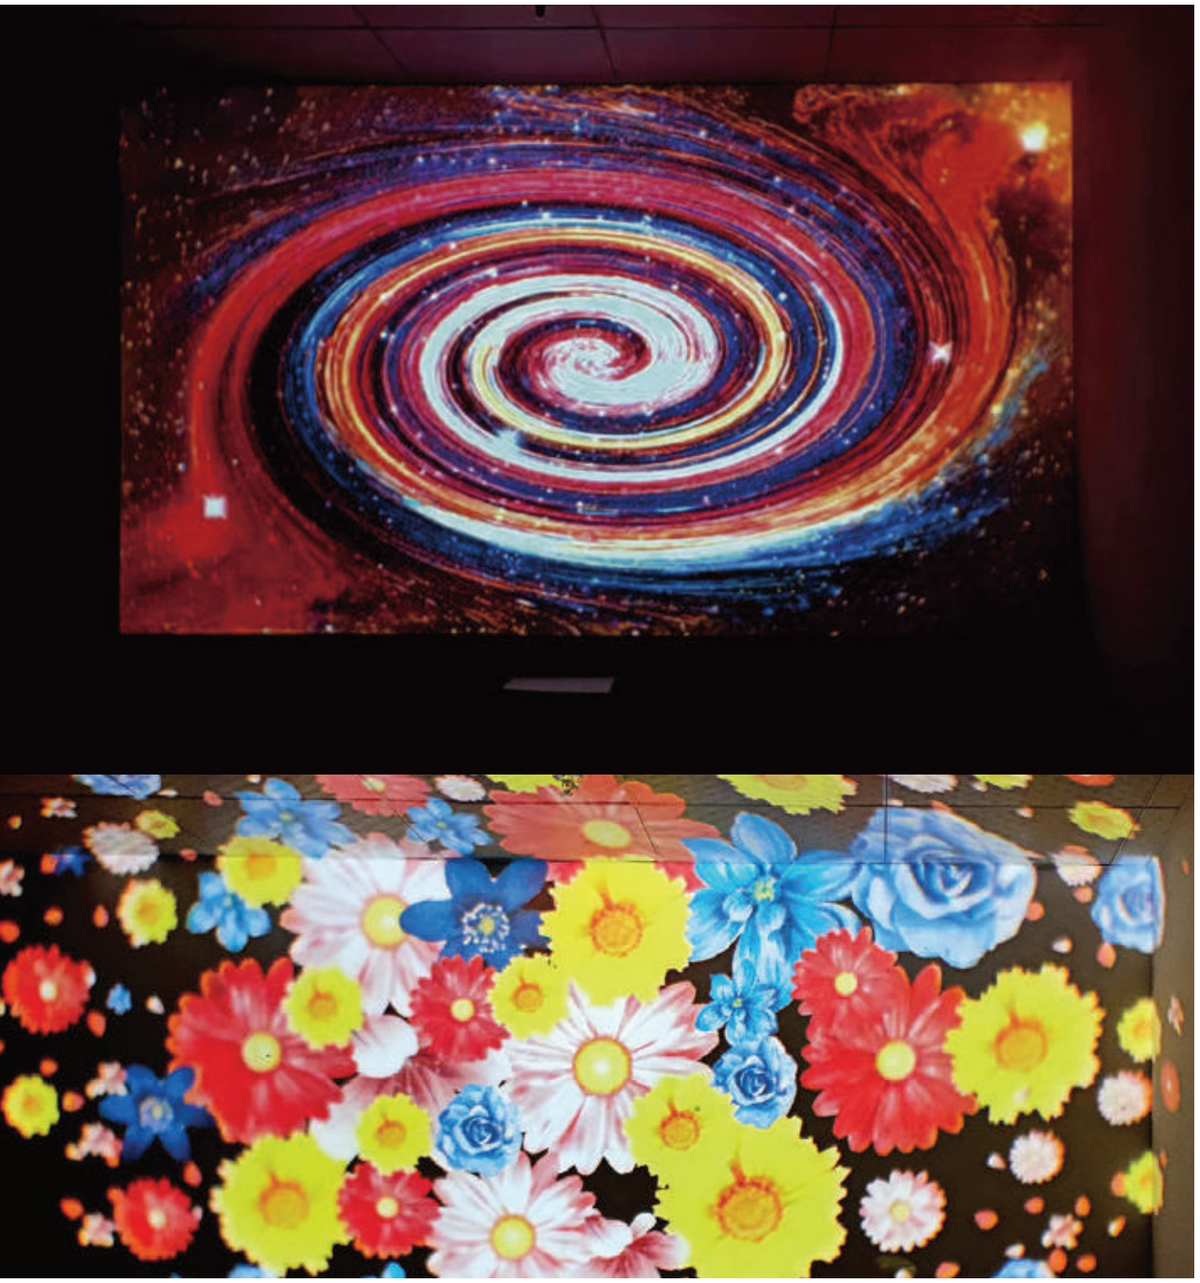



Body color

- Matt Black
- Matt White


Reflector color


- Matt White
- Matt Black



Model:	T7520C-4855	T7520C-4840
Power:	20W	20W
Luminious:	650-800lm	650-800lm
Beam angle:	55°	40°

Dimensions:



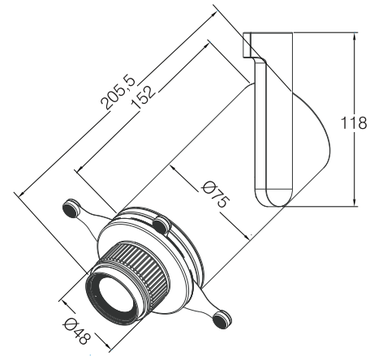

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track



Body color

Matt Black

Matt White

Reflector color

Matt White

Matt Black



Model:	T8530C-5855	T8530A-5840
Power:	28W	28W
Luminious:	1200-1500lm	1200-1500lm
Beam angle:	55°	40°

Dimensions:

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track



Body color

Matt Black

Matt White

Reflector color


Matt White


Matt Black



Model:	T9540C-5855	T9540C-5840
Power:	36W	36W
Luminious:	1600-1800lm	1600-1800lm
Beam angle:	55°	40°


Dimensions:

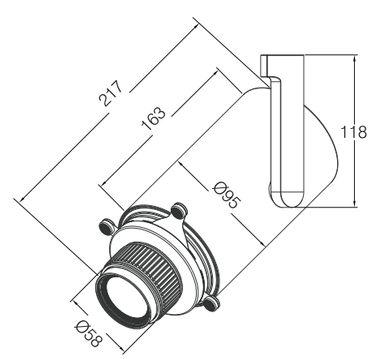

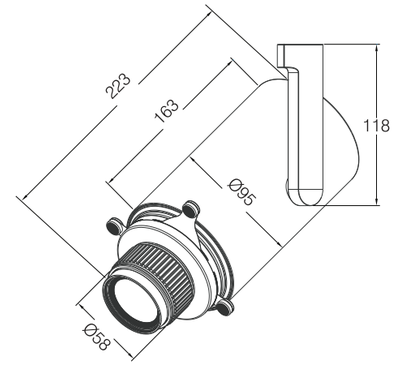

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track



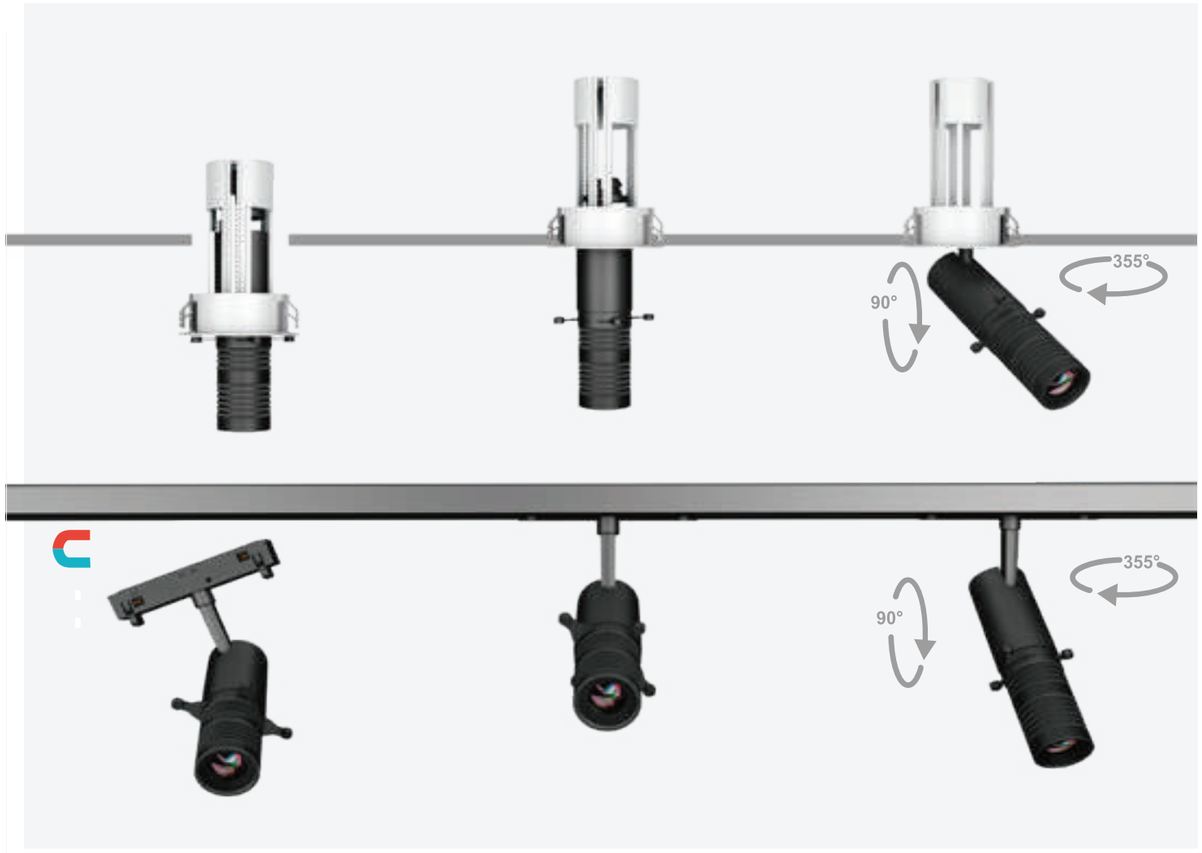






Body color

- Matt Black
- Matt White

Reflector color


- Matt White
- Matt Black






Model:	D7008B-3635	D7008B-3645
Power:	8W	8W
Luminious:	250-300lm	250-300lm
Beam angle:	Zoomable 25°-45°	Zoomable 20°-35°

Dimensions:



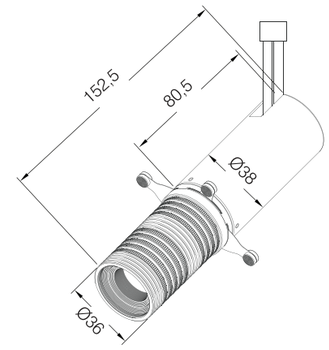

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth

Body color

- Matt Black
- Matt White

Reflector color


- Matt White
- Matt Black





Model:	C1070K-3836B
Power:	10W
Luminious:	350lm
Beam angle:	15°-36°

Dimensions:

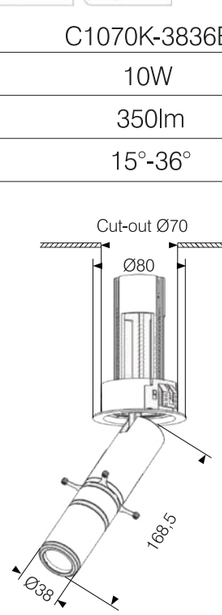

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth

Body color

- Matt Black
- Matt White

Reflector color


- Matt White
- Matt Black





Model:	C1070K-3855
Power:	10W
Luminious:	350lm
Beam angle:	55°

Dimensions:

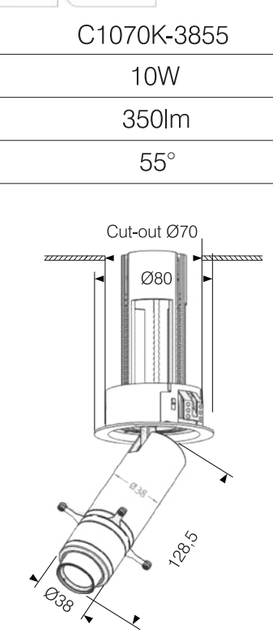

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi Zigbee, Bluetooth

ART TRACK LIGHT

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black



Model:	D1075K-3836B	D2095K-4836B	D30125K-5836B
Power:	10W	20W	28W
Luminious:	350lm	900lm	1300lm
Beam angle:		15°-36°	

Dimensions:

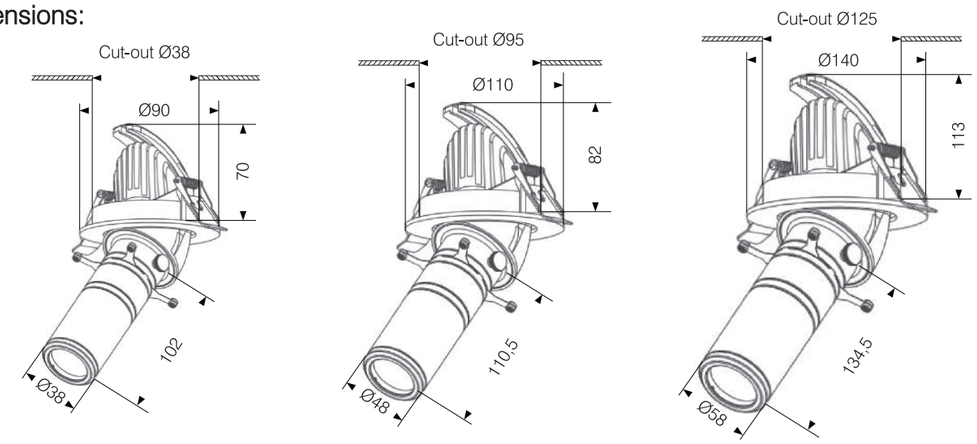

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth

ART TRACK LIGHT

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black



Model:	D1075K-3855	D2095K-4855	D30125K-5855
Power:	10W	20W	28W
Luminious:	350lm	850lm	1200lm
Beam angle:		55°	

Dimensions:

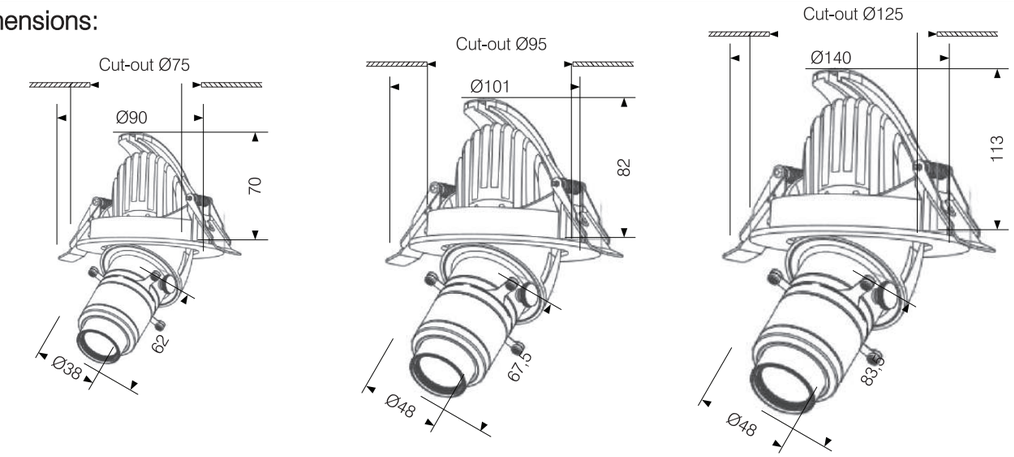

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth

Body color

Matt Black

Matt White

Reflector color


Matt White

Matt Black





Model:	T1003K-3836B
Power:	10W
Luminious:	350lm
Beam angle:	15°-36°
Dimensions:	

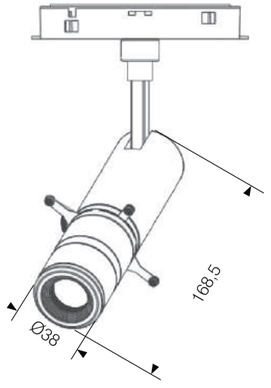

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512

ART TRACK LIGHT

Body color

Matt Black

Matt White

Reflector color


Matt White

Matt Black





Model:	T1003K-3855
Power:	10W
Luminious:	350lm
Beam angle:	55°
Dimensions:	

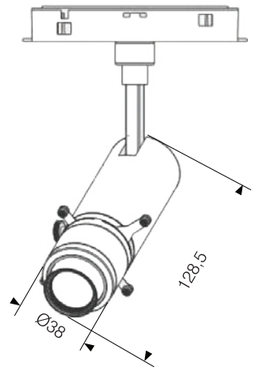

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512



Body color

- Matt White
- Matt Black

Reflector color


- Matt White
- Matt Black/ Shiny Black




TRACK AND LIGHT

Model:	MN2503
Power:	3W
Luminious:	225lm
Beam angle:	60°
Dimensions:	

Track	TMN101000	TMN101500	TMN102000



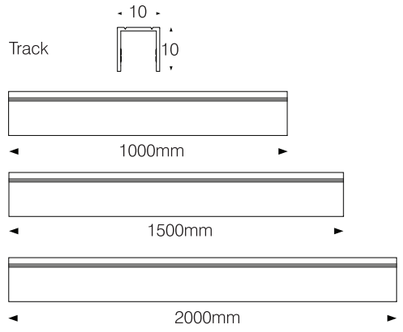

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

Matt Black


Reflector color

Black



ZOOMABLE RECESSED CEILING

Model:	DWY5503	DWY5505
Power:	3W	5W
Luminious:	240lm	400lm
Beam angle:	10°-40°	
Dimensions:		

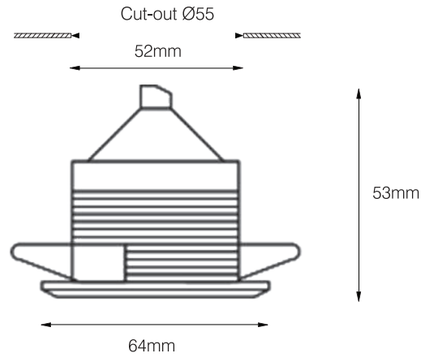

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V

Body color

Matt Black

Matt White

Reflector color


Black





ZOOMABLE RECESSED CEILING

Model:	DGWY5001	DGWY5503
Power:	1W	3W
Luminious:	60lm	180lm
Beam angle:	10°-50°	
Dimensions:		

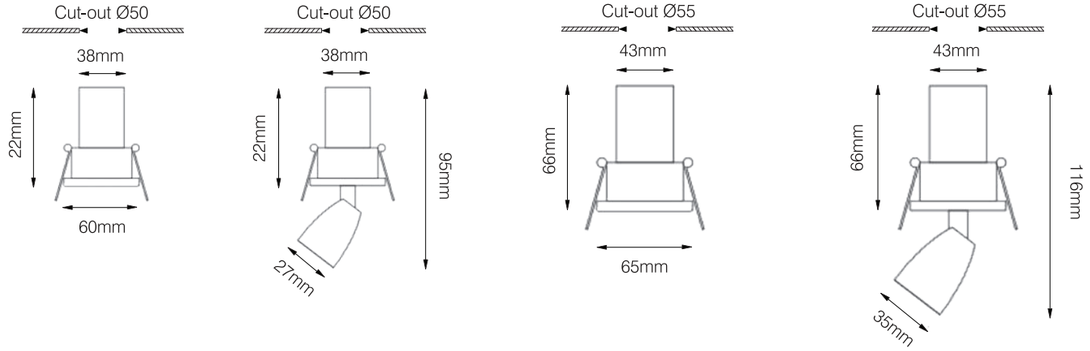

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Matetrial:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V

Body color

Matt Black

Reflector color

Black






Honey Comb

ZOOMABLE CABINET

Model:	DGCWY4501	DGCWY4503
Power:	1W	3W
Luminious:	80lm	240lm
Beam angle:	10°-40°	
Dimensions:		

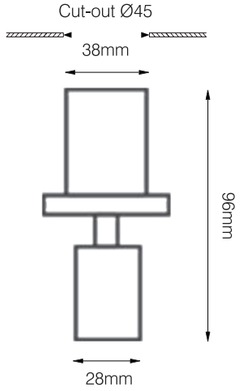

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V


Body color

Matt Black

Matt White



Model:	SWY3402MK
Power:	2W
Luminious:	100lm
Beam angle:	15°/ 24°/ 38°
Dimensions:	

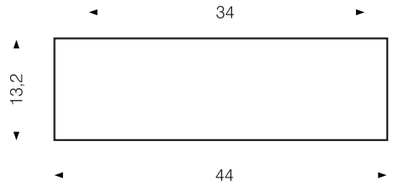

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	AC220V/ DC24V

Body color


Matt Black

Matt White



RECESSED CEILING

Model:	DWY3402MK
Power:	2W
Luminious:	100lm
Beam angle:	15°/ 24°/ 38°
Dimensions:	

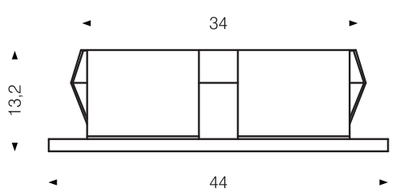

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	AC220V/ DC24V

Body color

Matt Black

Matt White

Reflector color

Black








Honey Comb

ZOOMABLE TRACK LIGHT

Model:	GWYD4205
Power:	5W
Luminious:	300lm
Beam angle:	10°-42°

Dimensions:

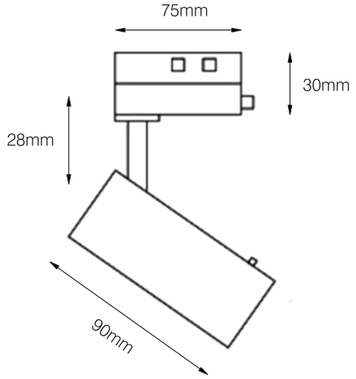

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	DC100-240V

Body color


Matt Black

Matt White

Reflector color

Black



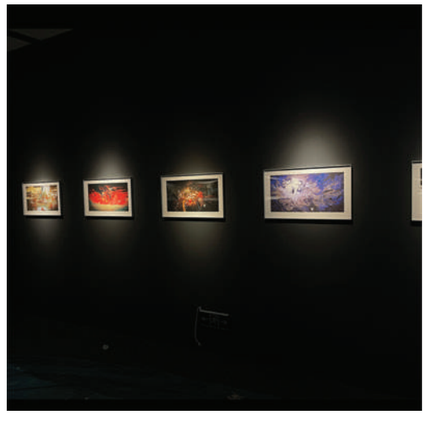




Honey Comb

ZOOMABLE TRACK LIGHT

Model:	GWYD5007	GWYD5010
Power:	7W	10W
Luminious:	420lm	600lm
Beam angle:	15°-45°	

Dimensions:

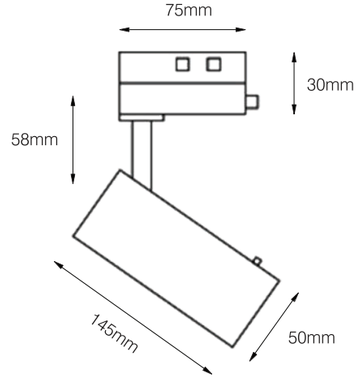

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V

TRACK LIGHT

Body color

- Matt Black
- Matt White

Reflector color

- Black







Shading fan leaf

ZOOMABLE TRACK LIGHT

Model:	TWYD702	TWYD703
Power:	1,5W	3W
Luminious:	90lm	240lm
Beam angle:	10°-40°	
Dimensions:		







Track:	T2727-1000	T2727-2000

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, 0-10V, customized
Voltage:	DC24V

SURFACE

Body color

- Matt Black

Reflector color

- Black







Honey Comb

ZOOMABLE SURFACE

Model:	SWY0501	SWY0503
Power:	1W	3W
Luminious:	80lm	240lm
Beam angle:	10°-40°	
Dimensions:		



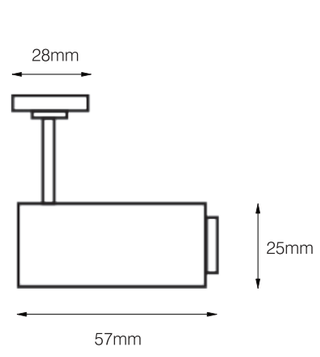

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V

Body color

Matt Black

Reflector color


Black





ZOOMABLE SURFACE

Model:	SWYD705
Power:	3W
Luminious:	225lm
Beam angle:	10°-40°
Dimensions:	

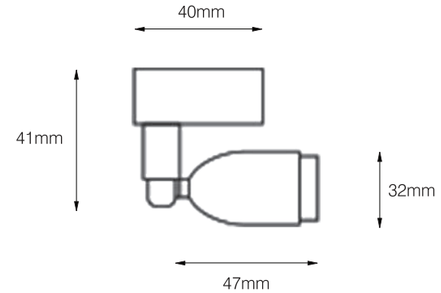

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V

Body color

Matt Black

Reflector color

Black






Honey Comb

ZOOMABLE CABINET

Model:	GPWY018	GPWY038
Power:	1W	3W
Luminious:	80lm	240lm
Beam angle:	8°-40°	
Dimensions:		

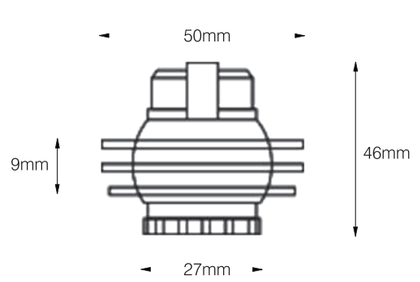

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	DC24V

Body color

Matt Black

Reflector color

Black






ZOOM PORTABLBE CHARGE

Model:	PCWY092
Power:	3W
Luminious:	240lm
Beam angle:	10°-40°

Dimensions:

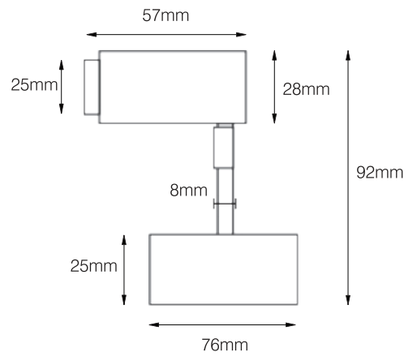

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95// 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Local dimming
Voltage:	C charing port

Body color

Matt Black

Reflector color

Black







ZOOM PORTABLE CHARGE

Model:	PCWY275	PCWY350
Power:	3W	
Luminious:	240lm	
Beam angle:	10°-40°	

Dimensions:

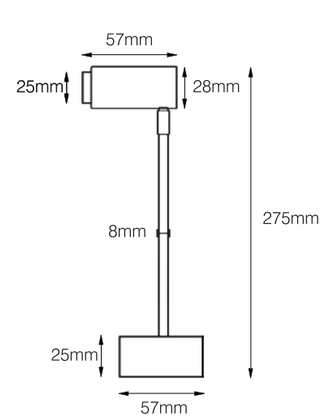

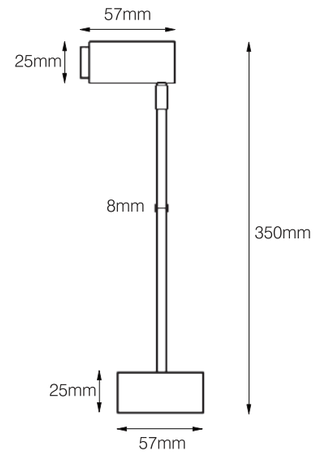

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Local dimming
Voltage:	C charing port

Body color

Matt Black

Reflector color

Black







ZOOMABLE FLOOR MOUNTED

Model:	GCWY045	GCWY057
Power:	1W	3W
Luminious:	80lm	240lm
Beam angle:	10°-40°	

Dimensions:

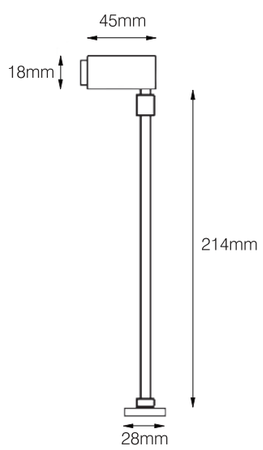

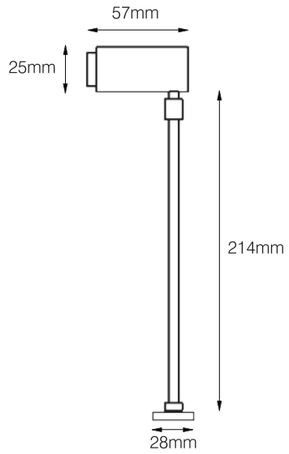

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	DC24V

Body color


Matt Black

Matt White

Reflector color

Black




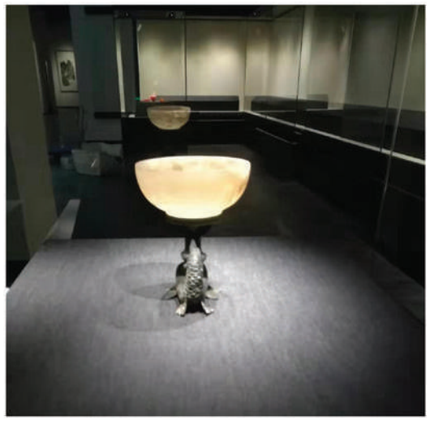


ZOOMABLE FLOOR MOUNTED

Model:	GSWY045	GSWY057
Power:	1W	3W
Luminious:	75lm	225lm
Beam angle:	10°-40°	

Dimensions:

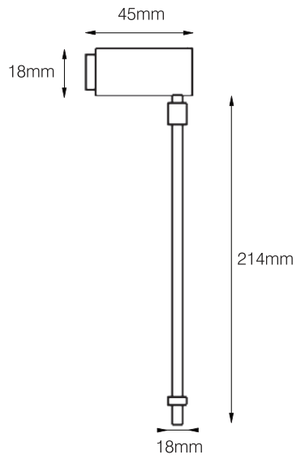

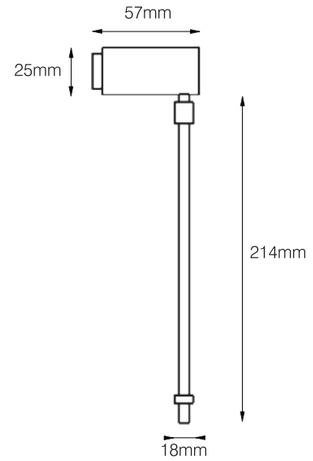

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	DC24V

Body color

Matt Black

Reflector color


Black



ZOOMABLE FLOOR MOUNTED

Model:	FNWY330
Power:	10W
Luminious:	750lm
Beam angle:	10°-60°

Dimensions:

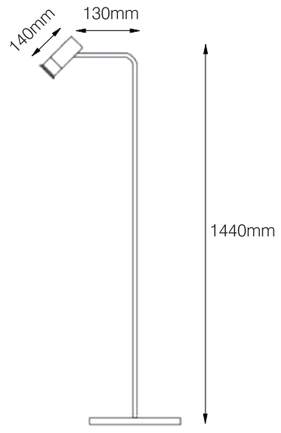

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material	Aluminum alloy lamp body
CCT:	3000K/ 4000K/6000K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Local dimming
Voltage:	AC100-240V

Body color

Matt Black

Reflector color

Black









ZOOMABLE FLOOR MOUNTED

Model:	FMWY0049
Power:	10W
Luminious:	660lm
Beam angle:	10°-60°

Dimensions:

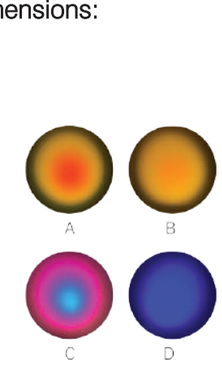

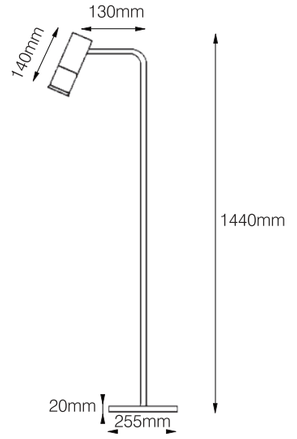

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	A style/ B style/ C style/ D style
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Local dimming
Voltage:	AC100-240V


Body color


Black

Golden



Model:	LWY520	LWY850
Power:	6W	12W
Luminious:	30lm	60lm
Beam angle:	60°	
Dimensions:		

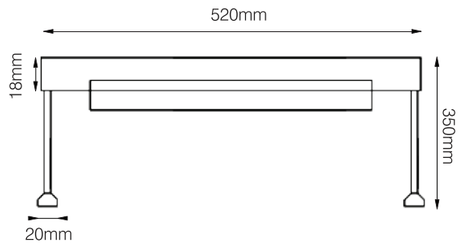

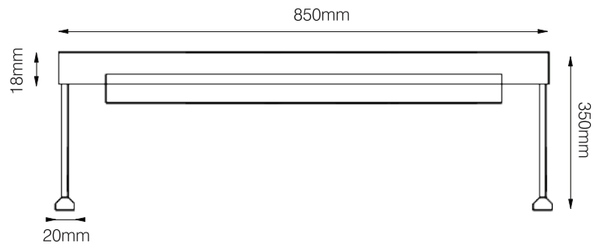

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
Material:	Aluminum alloy lamp body
CRI(Ra):	>92/ 95/ 97
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	DC24V

MAGNETIC SLIM

TRACK SYSTEM 4.0

Tunable White




TRACK MAGNETIC SLIM


Surface Mount track

Accessories



SS9001 SS9002 SS9003 SS9004 SS9005






Model:	SS1000/ SS1500/ SS2000/ SS3000
Dimensions:	1m/ 1,5m/ 2m / 3m
Colour:	Black, White
Output current:	DC48V


Recessed track with trim

Accessories



SR9006 SR9007 SR9008 SR9009 SR9010





Model:	SR1000/ SR1500/ SR2000/ SS3000
Dimensions:	1m/ 1,5m/ 2m/ 3m
Colour:	Black, White
Output current:	DC48V


Suspended Track

Accessories



SP9001 SP9002 SP9003 SP9004 SP9005





Model:	SP1000/ SP1500/ SP2000/ SP3000
Dimensions:	1m/ 1,5m/ 2m/ 3m
Colour:	Black, White
Output current:	DC48V

http://ades-lighting.com

MAGNETIC SLIM

Body color


- Matt Black
- Matt White

Reflector color

- Matt White
- Matt Black/ Shiny Black



Model:	AMS4807	AMS4810	AMS5820	AMS6825	AMS3080
Power:	7W	10W	20W	25W	30W
Luminious:	420lm	600lm	1200lm	1500lm	1800lm
Beam angle:			24°/ 36°		
Dimensions:					

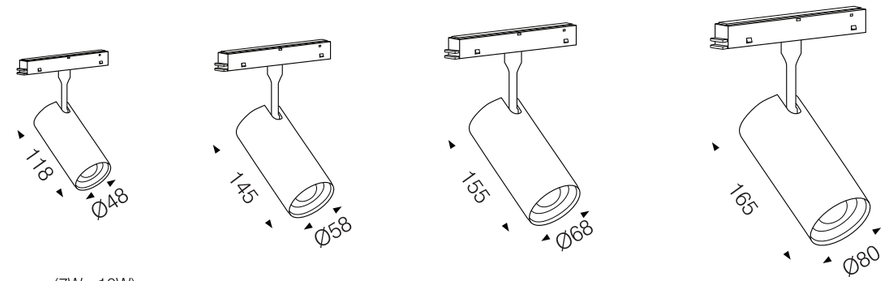

(7W - 10W)

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V

MAGNETIC SLIM

Body color


- Matt Black
- Matt White

Reflector color

- Black



Model:	AMGS11206	AMGS22012
Power:	6W	12W
Luminious:	360lm	720lm
Beam angle:	24°	120°
Dimensions:		

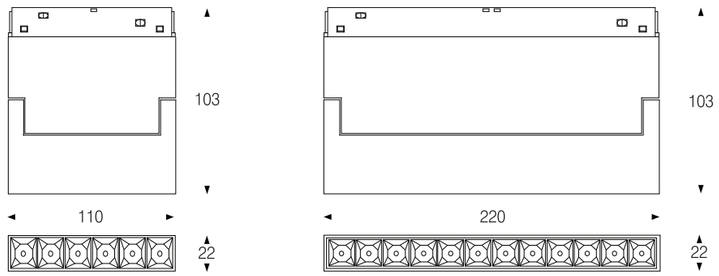

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V

MAGNETIC SLIM

Body color


- Matt Black
- Matt White

Reflector color

- Black



Model:	AMLS12006	AMLS24012	AMLS36018	AMLS48024
Power:	6W	12W	18W	24W
Luminious:	360lm	720lm	1350lm	1440lm
Beam angle:	24°/ 36°			
Dimensions:				

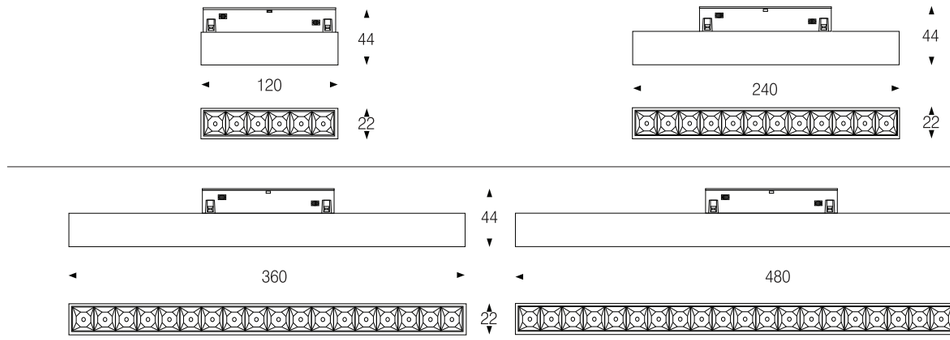

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V



MAGNETIC SLIM


Body color


- Matt Black
- Matt White





Model:	AMLL12006	AMLL30010	AMLL60020	AMLL90030
Power:	6W	10W	20W	30W
Luminious:	360lm	600lm	1200lm	1800lm
Beam angle:		120°		

Dimensions:



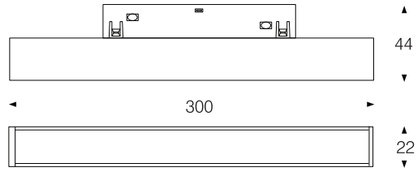

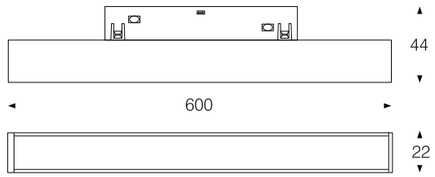

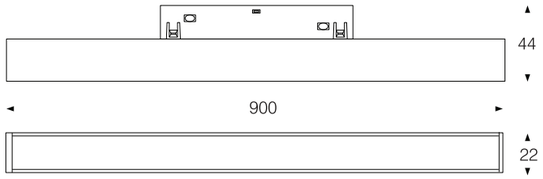

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable Whitte
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V

MAGNETIC SLIM

Body color


Brass

Reflector color

Shiny Black



Model:	AMS3507G
Power:	7W
Luminious:	420lm
Beam angle:	20°
Dimensions:	



General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V

Body color

- Matt White
- Matt Black

Reflector color


- Matt White
- Matt Black



ZOOMABLE MAGNETIC SLIM

Model:	AMS4507Z
Power:	7W
Luminious:	420lm
Beam angle:	Zoomable 6°-60°

Dimensions:



General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V

MAGNETIC SLIM

Body color

- Matt White
- Matt Black


Reflector color

- Matt White
- Matt Black



ZOOMABLE MAGNETIC SLIM

Model:	AMS3505Z	AMS4510Z	AMS5515Z	AMS6520Z	AMS7525Z
Power:	5W	10W	15W	20W	25W
Luminious:	300lm	600lm	1200lm	1200lm	1500lm
Beam angle:	Zoomable 10°-55°				
Dimensions:					

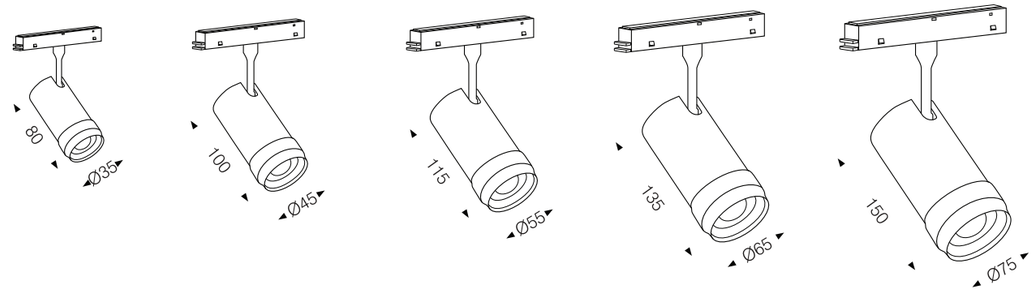

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V

MAGNETIC SLIM

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black



Model:	AMW10220
Power:	20W
Luminious:	730lm
Beam angle:	24°/ 36°

Dimensions:

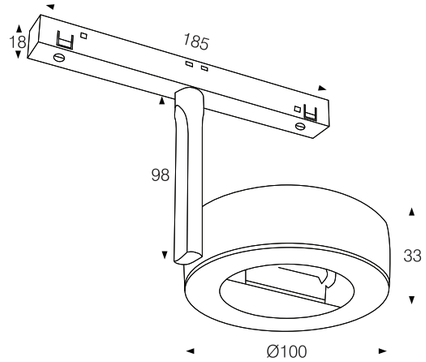


General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V



TRACK MAGNETIC
ULTRA THIN

Recessed track with trim




Accessories



SA9001 SA9002 SA9003 SA9004 SA9005

Model:	SA1000/ SA1500/ SA2000/ SA3000
Dimensions:	1m/ 1,5m/ 2m/ 3m
Colour:	Black, White
Output current:	DC48V

Surface Mount track



Accessories



SC9006 SC9007 SC9008 SC9009 SC9010

Model:	SC1000/ SC1500/ SC2000/ SC3000
Dimensions:	1m/ 1,5m/ 2m/ 3m
Colour:	Black, White
Output current:	DC48V

Body color

- Matt Black
- Matt White


Reflector color

- Black



Model:	UMNL40210	UMNL72020	UMNL104030
Power:	10W	20W	30W
Luminious:	600lm	1200lm	1800lm
Beam angle:		24°/ 36°	

Dimensions:

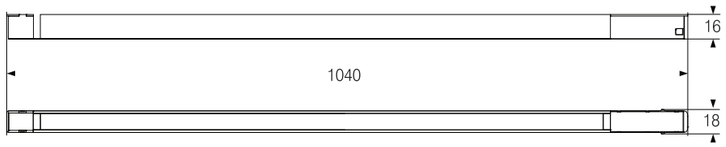

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V

MAGNETIC
ULTRA THIN

Body color

- Matt Black
- Matt White


Reflector color

- Black



Model:	UMLS34712	UMLS48018	UMLS61024
Power:	12W	18W	24W
Luminious:	720lm	1080lm	1440lm
Beam angle:		24°/ 36°	

Dimensions:

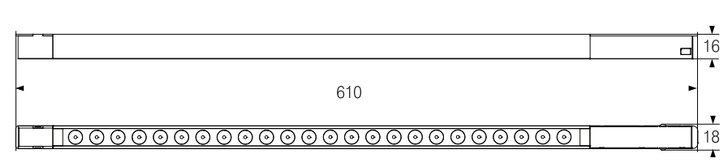

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V

A-PRO

Track Light



A range of track light led in black or white finish and single or multiple square cellular options. Round aperture optics for excellent glare control with a <3 step MacAdam ellipse tolerance – as ADES A-Pro track light range

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black



TRACK LIGHT

Model:	AP20430-6T	AP14936-9T	AP11016-4T	AP40560-12T
Power:	30W	9x4W	4x4W	2x30W
Luminious:	2550lm	3060lm	1360lm	5100lm
Beam angle:	12°/ 24°/ 38°/ 50°			
Dimensions:				

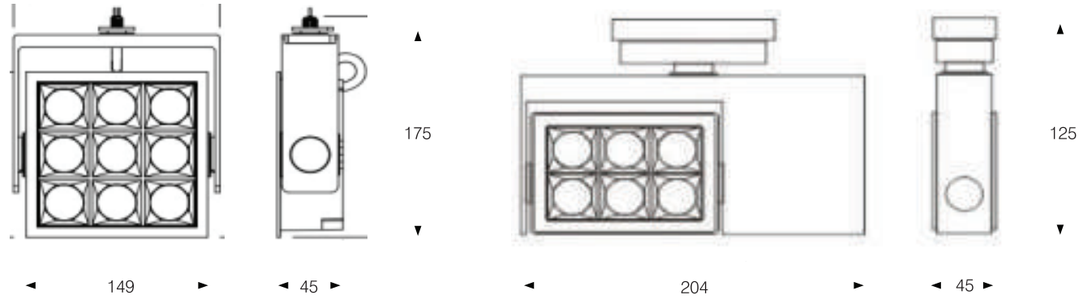

General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>80/ 90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



ERIS
TRACK LIGHT

Body color

- Matt White
- Matt Black


Reflector color


- Matt White
- Matt Black



TRACK LIGHT

Model:	E4510T	E6620T
Power:	10W	20W
Luminious:	750lm	1500lm
Beam angle:	24°	
Dimensions:		






General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track

TUBE T5


Body color

Aluminum

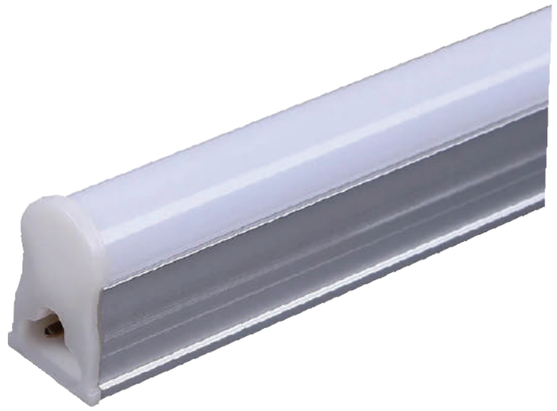

Model:	AD-T5-3003	AD-T5-6006	AD-T5-9010	AD-T5-12012
Power:	3W	6W	10W	12W
Luminious:	300lm	600lm	1000lm	1200lm
Beam angle:	120°			

Dimensions:

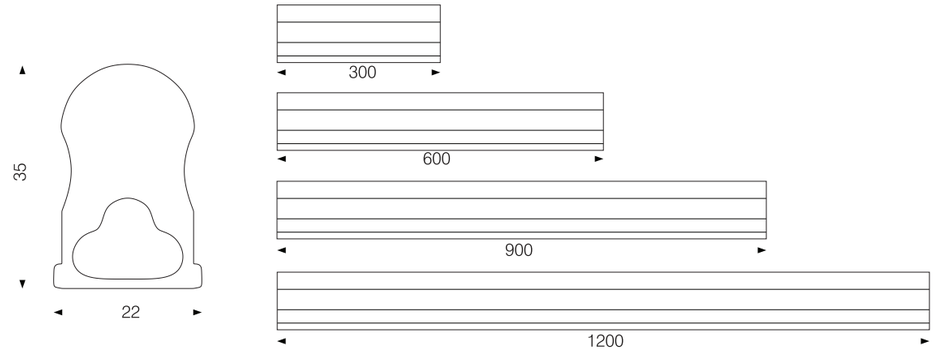


General specifications	
LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control::	On/ Off

FLEXIBLE Wall WASHER



Flexible wall washer light is accent lighting product that could wash the wall with special color light or create shadows, grazer lighting effect. It integrates the flexible housing with lens that could achieve 15-60 degree narrow beam and also waterproof for outdoor applications. It is flexible that could bend vertically or horizontally, maximum running length could up 20meters.






1 BIN | DC 24V | .IES | IP 67 | Anti-UV | 3 Years warranty | CE | RoHS

Model:	WWL1809-06	WWL1809-08	WL1809-18
Power:	6W	8W	18W
Luminious:	264lm	540lm	1900lm
Beam angle:	15°/ 30°/ 45°/ 15x60°		
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512		
Color:	RGB	RGBW	MONO
Voltage:	DC12V-24V		

Dimensions:


MONO

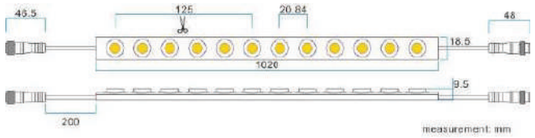

RGB



RGB

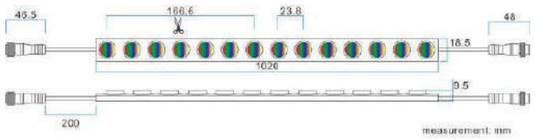

DMX512 RGB



Accessories


Metal Clips


Aluminum profile


Rotary bracket


Silicon clips


End cap



VHB tape





Model:	WWS2924-12	WWS2924-24
Power:	12W	24W
Luminious:	1200lm	1200lm
Beam angle:	15°/ 30°/ 50°/ 20x35°/ 18x20°/ 20x55°	
Color:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW	
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512	
Voltage:	DC12V-24V	

Dimensions:

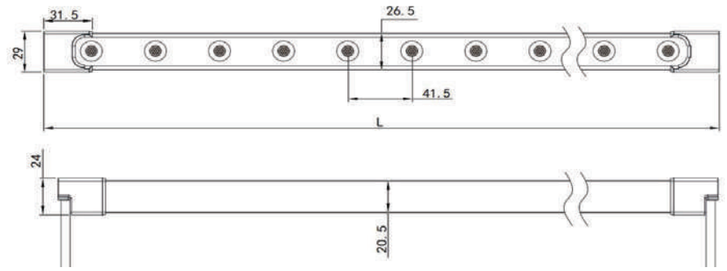

Bending diameter



Accessories option




Aluminum Clip




Adjustable Angle Clip



Aluminum Profile

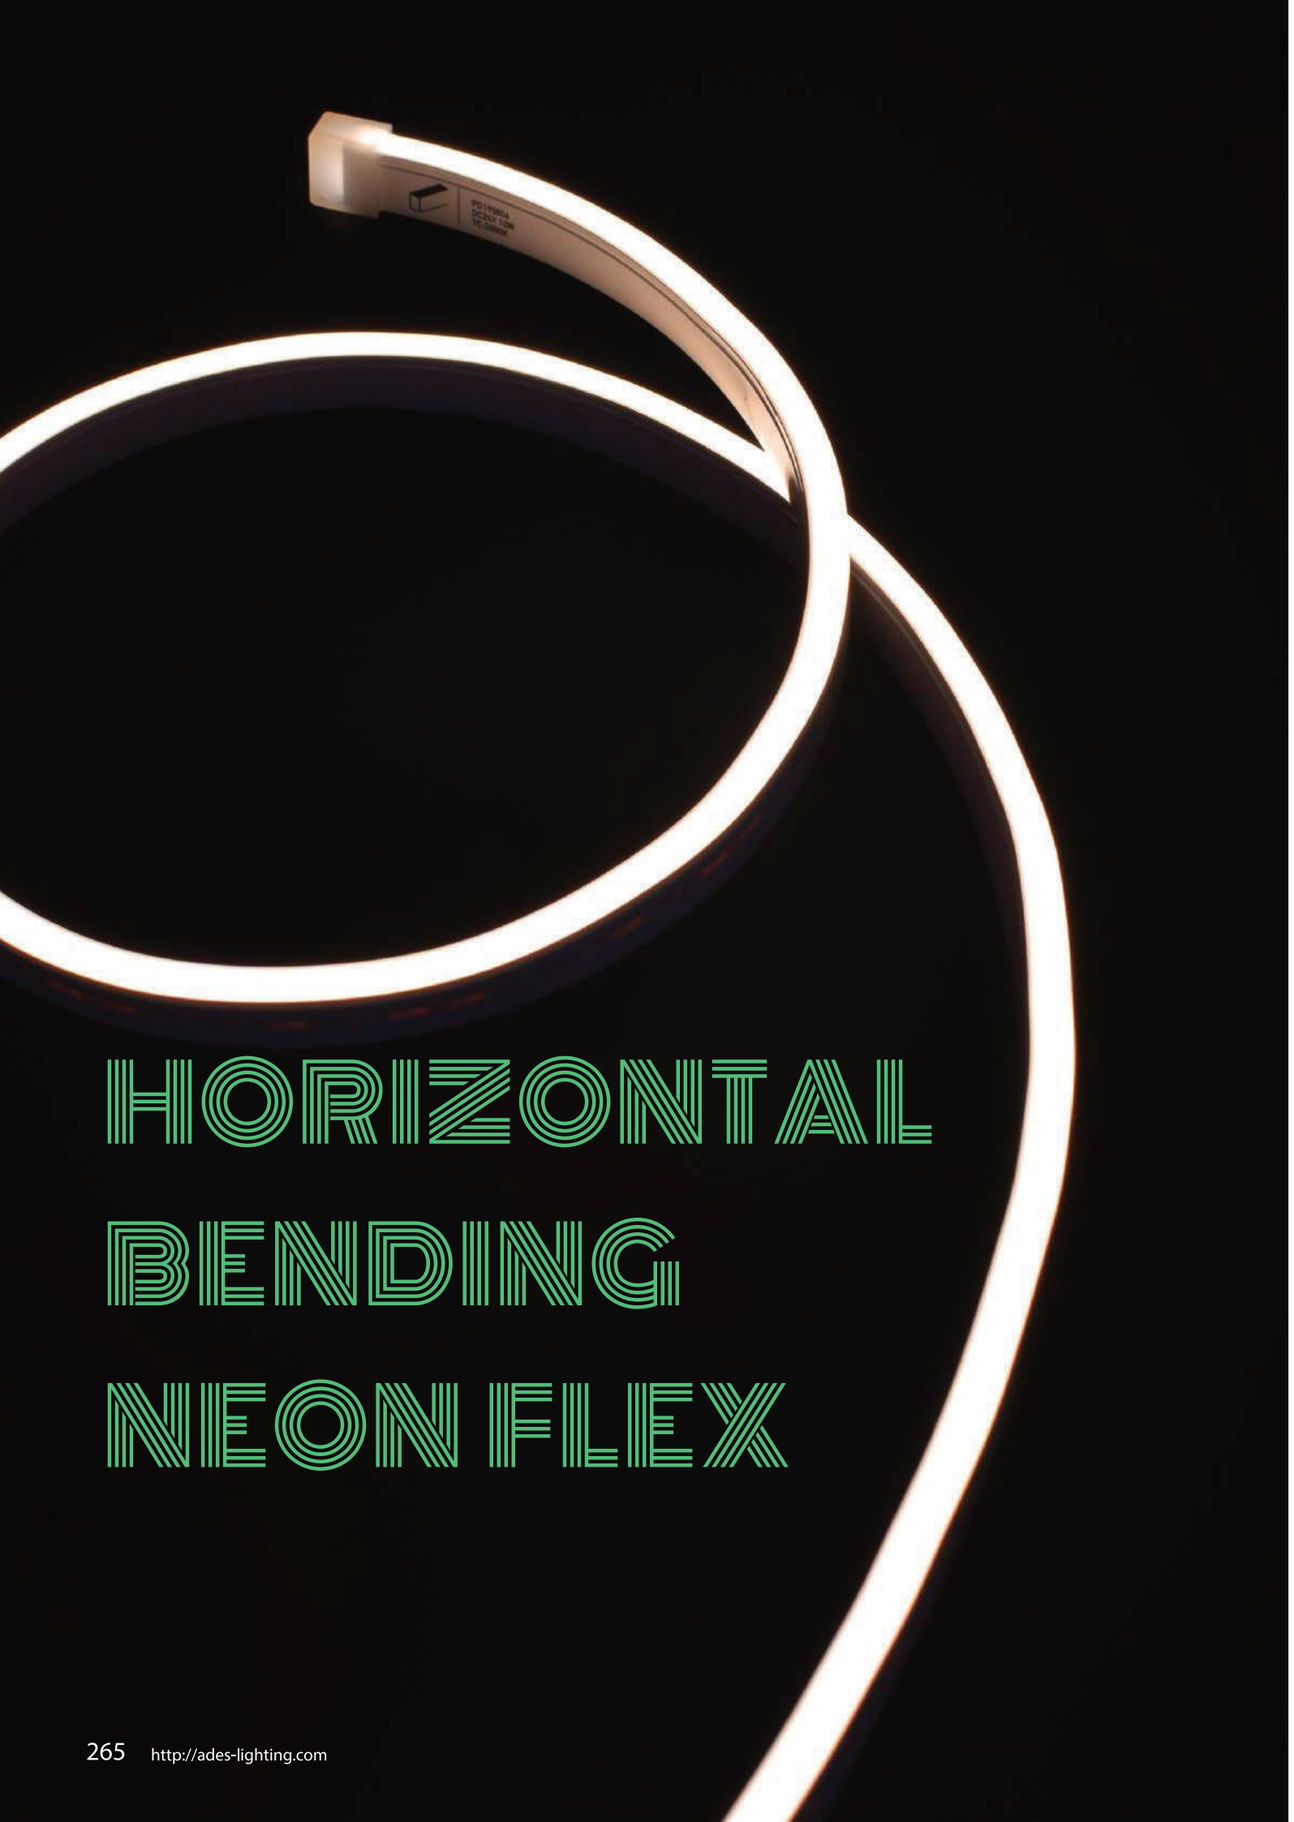






Model:	NTS1010-2405	NTS1010-2410
Power:	5W	10W

Dimensions:

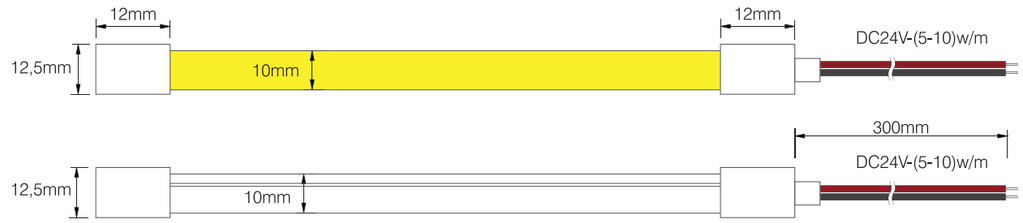

Accessories



Direct cable end cap


Side cable end cap


Bottom cable end cap


Sealing end cap



Aluminum profile


Aluminum clip



Stainless steel clip

General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V

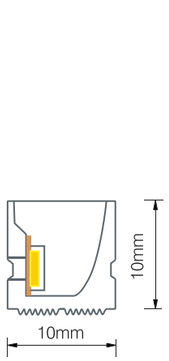







Model:	NS1010-05	NS1010-10	NS0612-05	NS0612-10
Power:	5W	10W	5W	10W

Dimensions:

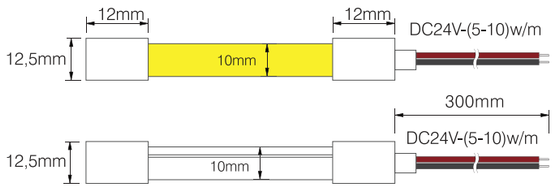

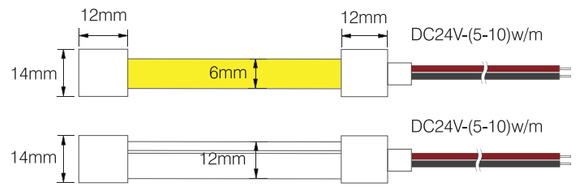

Accessories


Direct cable end cap



Side cable end cap


Bottom cable end cap


Sealing end cap



Aluminum profile



Flexible profile


Aluminum clip

General specifications


LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V




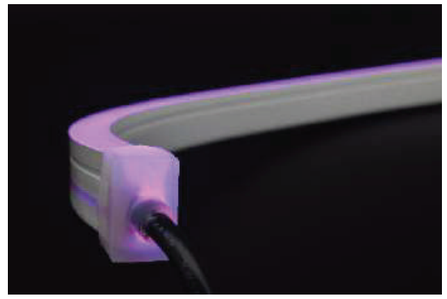


Model:	NT1010-05	NT0612-10	NT1010-10	NT1616-14	NT2020-14	NT3020-14
Power:	5W	10W	10W	14W	14W	14W

Dimensions:

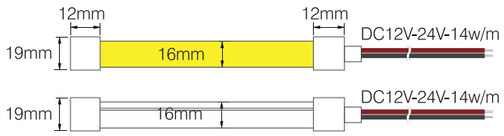

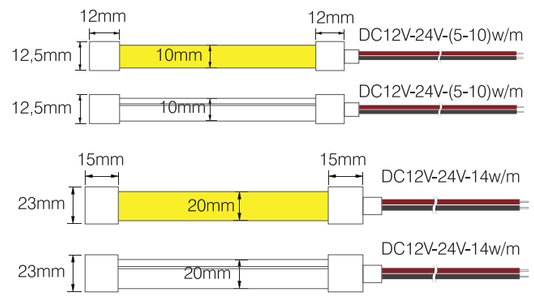

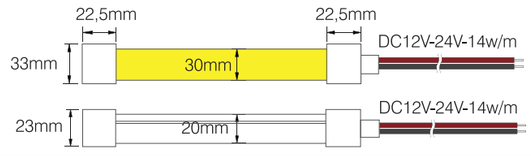


Accessories



Direct cable end cap


Side cable end cap


Bottom cable end cap


Seeling end cap



Aluminum profile


Aluminum clip


Stainless steel clip

General specifications


LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512
Voltage:	DC12V-24V





Model:	NS1017-05	NS1017-10
Power:	5W	10W

Dimensions:

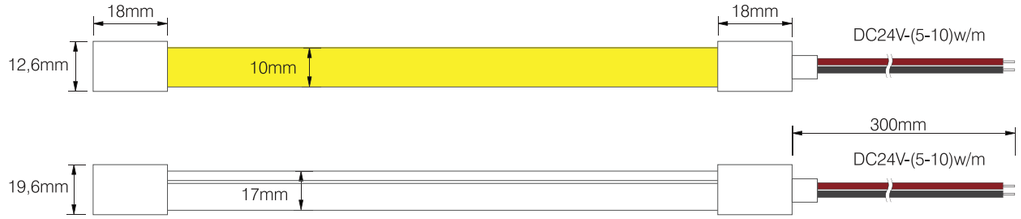


Accessories


Direct cable end cap


Side cable end cap



Sealing end cap


Aluminum profile


Aluminum clip

General specifications


LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V





Model:	NS1223-05	NT1223-10	NT1223-15
Power:	5W	10W	15W

Dimensions:

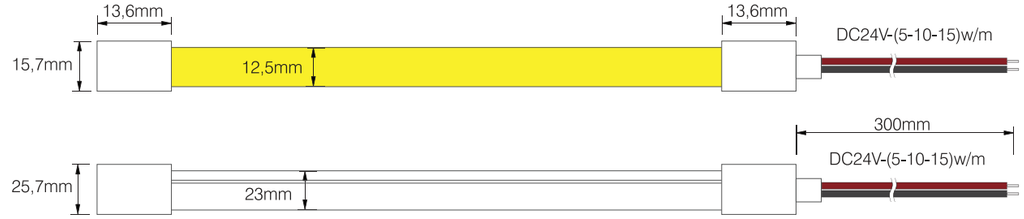


Accessories


Direct cable end cap



Seeling end cap


Aluminum profile


Aluminum clip

General specifications


LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V





Model:	NS1625-05	NS1625-10	NS1625-15
Power:	5W	10W	15W

Dimensions:

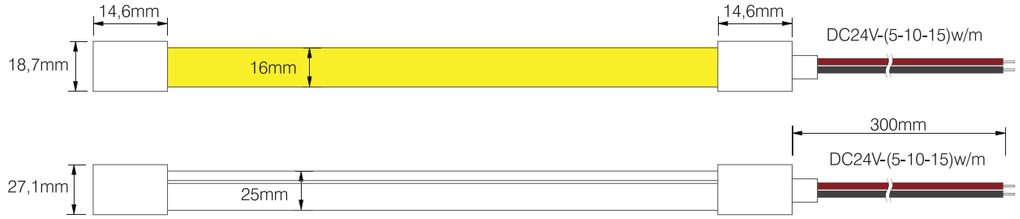


Accessories



Direct cable end cap | Sealing end cap | Aluminum profile | Aluminum clip

General specifications


LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V





Model:	NS1516-05	NS1516-10	NT1516-15
Power:	5W	10W	15W

Dimensions:

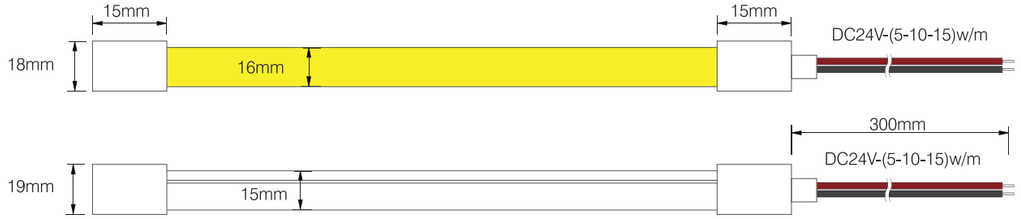


Accessories



Direct cable end cap | Side cable end cap | Bottom cable end cap | Sealing end cap | Aluminum profile | Aluminum clip

General specifications


LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V





Model:	NS2020-2405	NS2020-2410	NS2020-2415
Power:	5W	10W	15W

Dimensions:

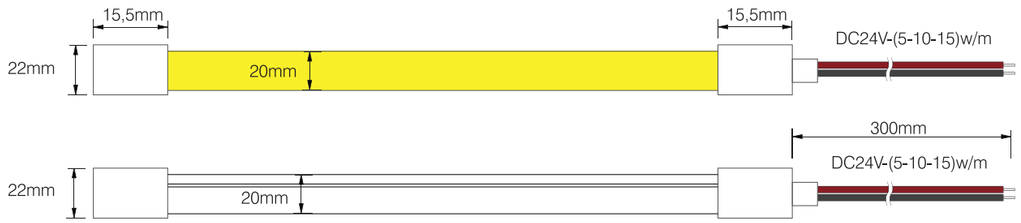


Accessories



Direct cable end cap



Sealing end cap




Aluminum clip



Aluminum profile

General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V








Model:	NS1720-2410
Power:	10W

Dimensions:

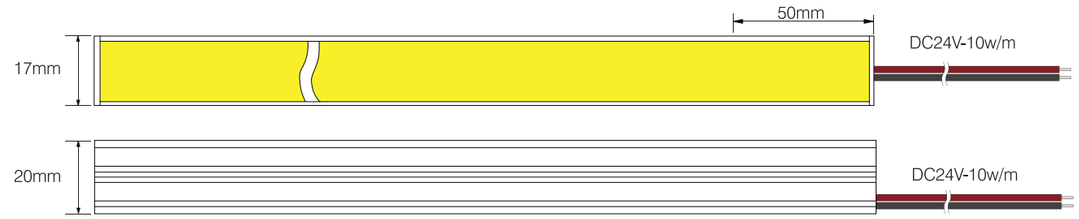

Accessories




End cap

General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V

3D BENDING








Model:	NS1819-2405	NS1819-2410
Power:	5W	10W

Dimensions:

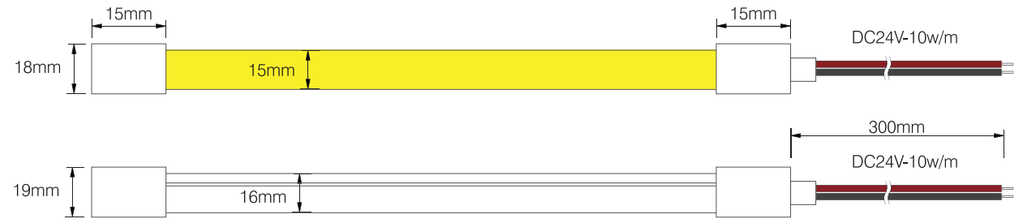

Accessories



Direct cable end cap



Side cable end cap



Bottom cable end cap




Sealing end cap



Aluminum profile




Flexible profile




Aluminum clip

General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V

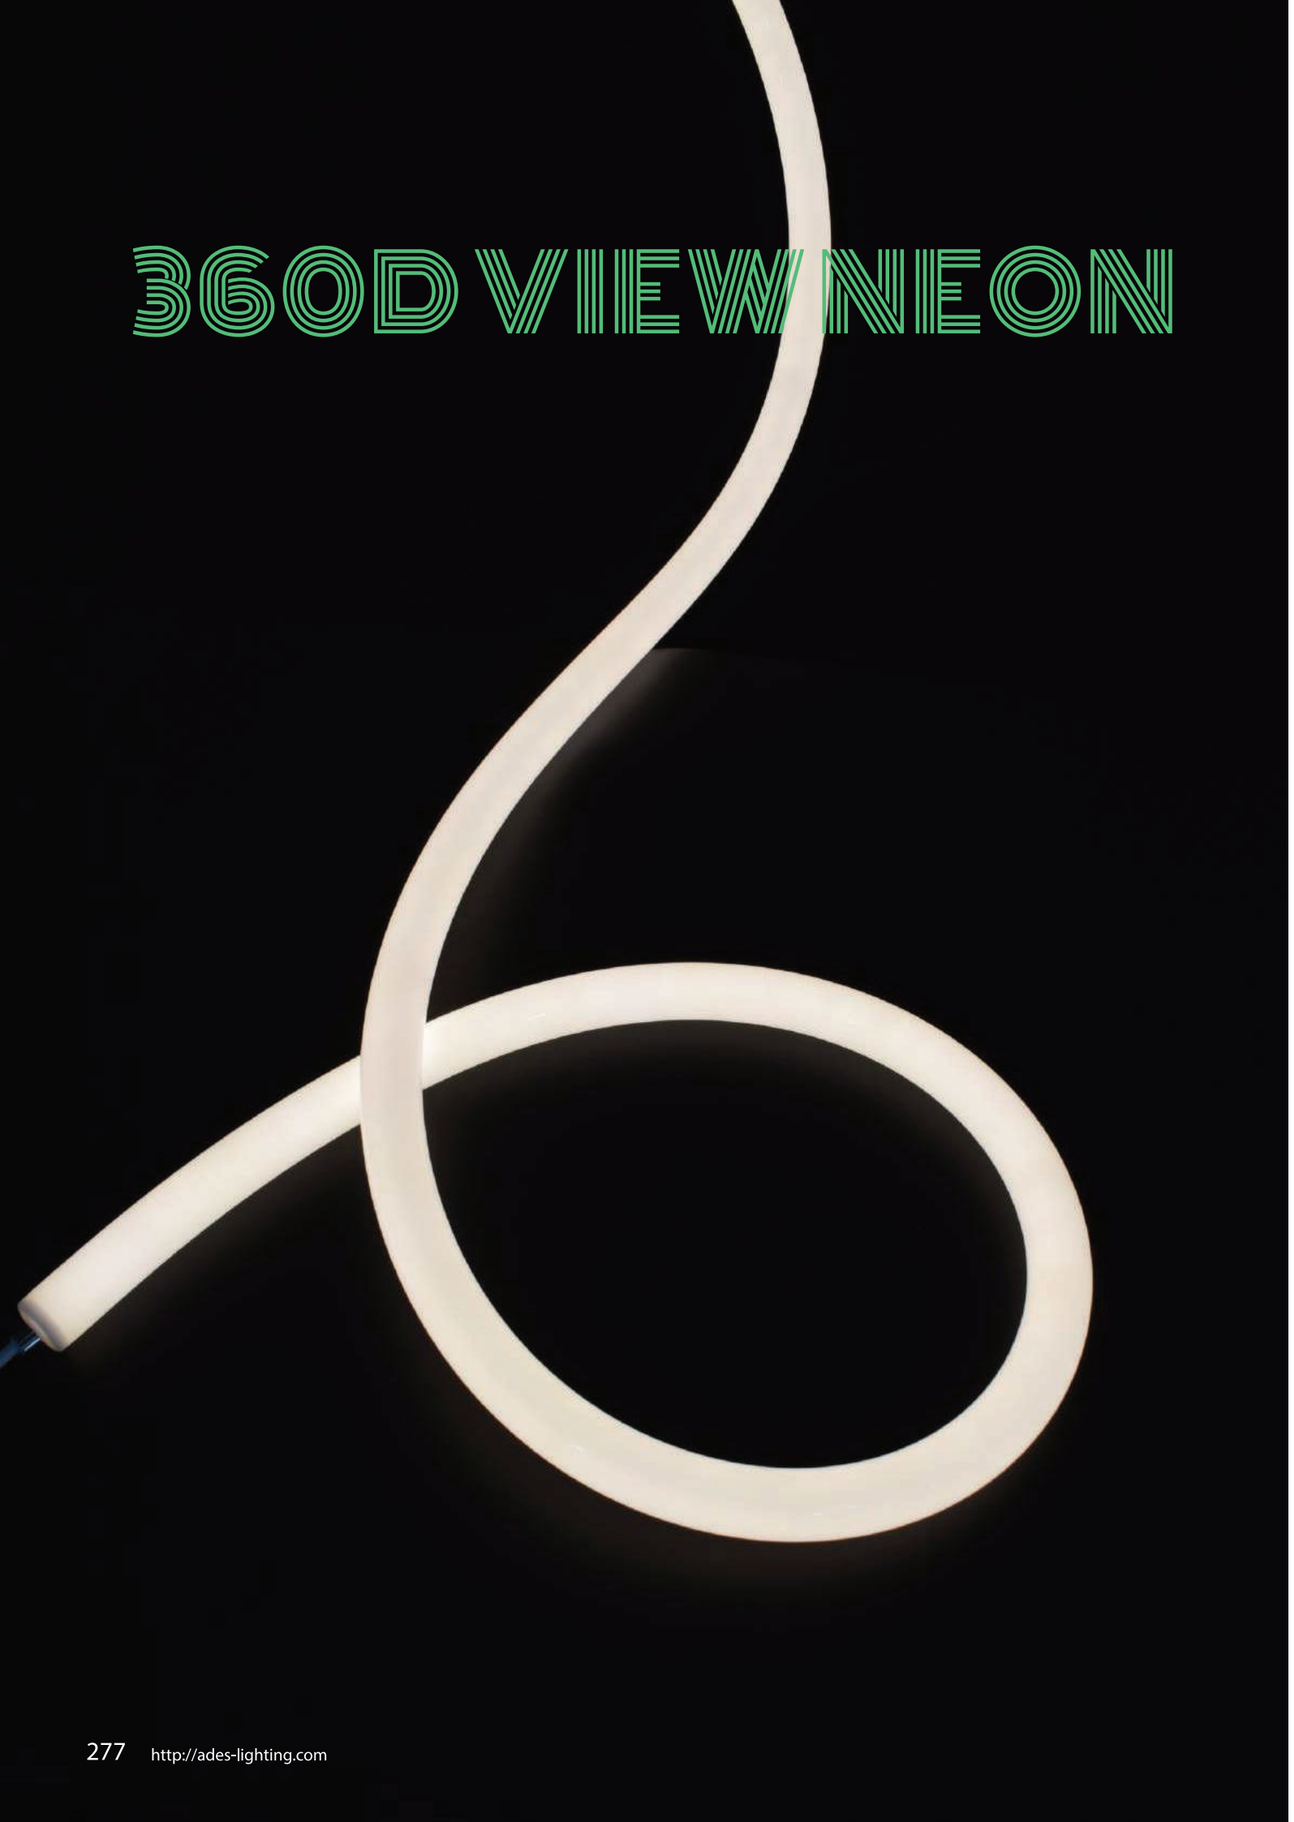






Model:	D16-05	D16-10
Power:	5W	10W

Dimensions:

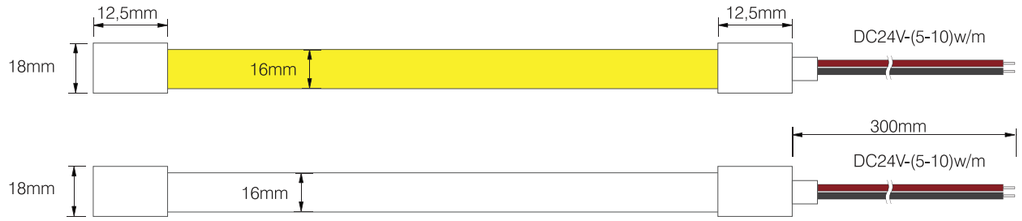

Accessories



Direct cable end cap




Silicone end cap



Clip

General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V





Model:	D25-05	D25-10
Power:	5W	10W

Dimensions:




Accessories



General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512
Voltage:	DC24V





Model:	D30-05	D30-10
Power:	5W	10W

Dimensions:



Accessories




Metal end cap | Joint end cap | Silicone end cap | Clip | Suspension kit

General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512
Voltage:	DC24V




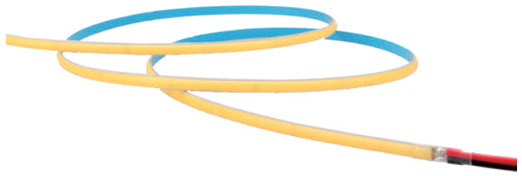



Model:	CLS48005	CLS42010	CLS42015
Power:	5W	10W	15W

Dimensions:

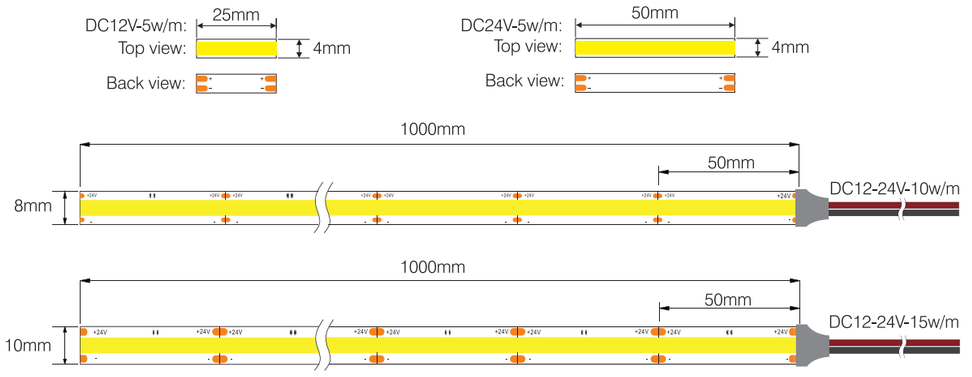

General specifications


LED:	COB
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC12V/ DC2V





Model:	SLS12012	SLS12020	SLS24024	SLS24028
Power:	12W	20W	24W	28W

Dimensions:

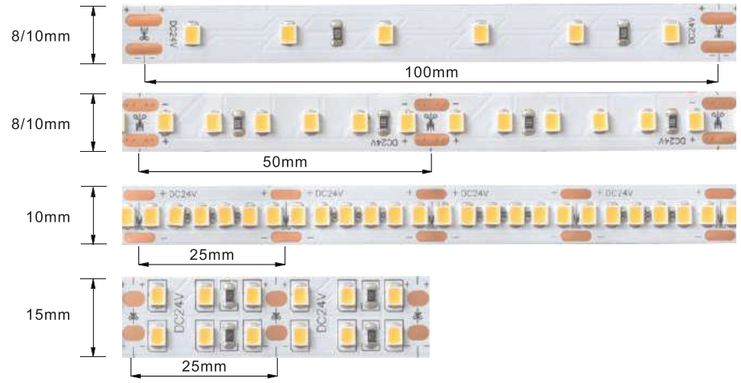


General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC12V/ DC24V




Model:	CL07-68	CL14-68
Power:	7,2W	14,4W

Dimensions:

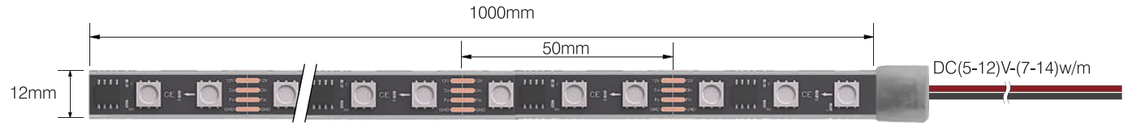


General specifications	
LED:	WS IC 2815/ WS IC 16703
Pixels:	10px/m - 20px/m - 30px/m - 60px/m - 144px/m
CRI(Ra):	>80
CCT:	Full Color
IP rating:	68
Lifetime:	>50.000h
Control:	Dmx512
Voltage:	DC(5-12)V

LED STRIP



Model:	CL07-20	CL14-20
Power:	7,2W	14,4W

Dimensions:

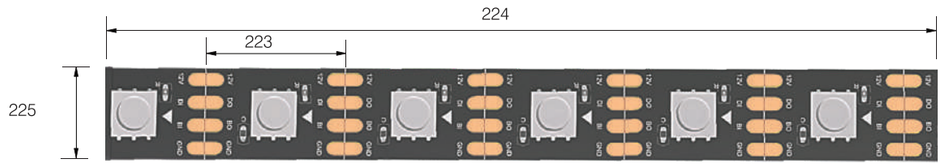

General specifications

LED:	SMD
Pixels:	10px/m - 20px/m - 30px/m - 60px/m - 144px/m
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC(12-24)V

MOON

Body color


- Matt Black
- Matt White



RECESSED CEILING

Model	M100-03
Power	3W
Luminious	210lm

Dimensions

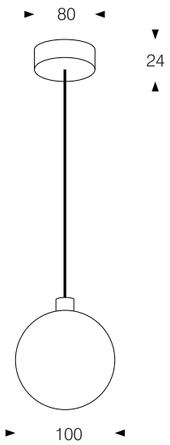

General specifications	
CCT:	2700K/ 3000K/ 4000K
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali

UFO

Body color


- Matt Black
- Matt White




RECESSED CEILING

Model	U400-28	U500-36
Power	28W	36W
Luminious	1800lm	2700lm
Beam angle	60°	60°

Dimensions

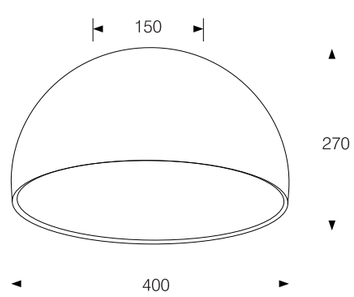

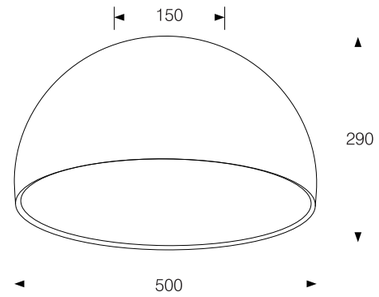

General specifications	
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

DECORATE



Air Gesture



Specifications

Size: D400mm/ D580mm

Body Color: Gold Rose/ Bright Black

Plating Chrome/ Chrome



Tunable white 2700K - 5700K


Tunable white enables you to perfectly illuminate work plain and ideally emphasise environment. Warm white light colours is suitable for relaxing and winter time. Neutral or cool white light colours are ideal for helping maintain performance and concentration for a longer time.




Dimmable 5%-100%

Dimmable function give you flexibility to choose the preferred illuminance level.

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.

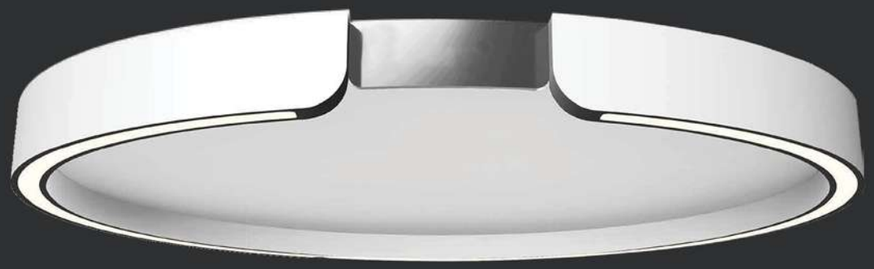



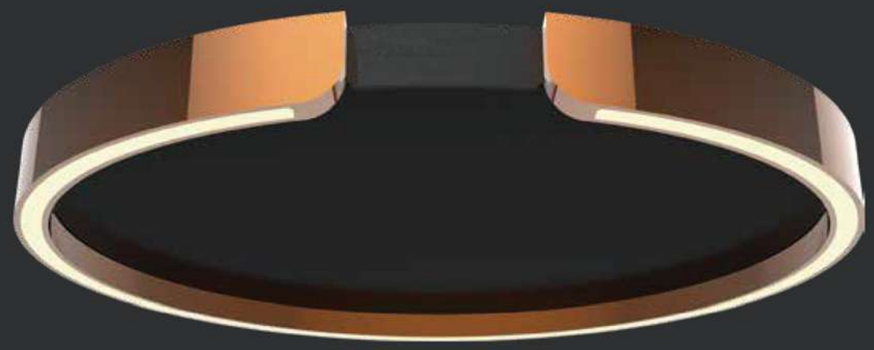



UNMATCHED LIGHT EFFECT PERFORMANCE

SMALL SIZE	LED / 24W
BIG SIZE	LED / 36W

Ultra-high-quality surface treatment, 5 procedures, double-layer plating process, quality texture

Original installation structure, no exposed screws, concise and technological sense

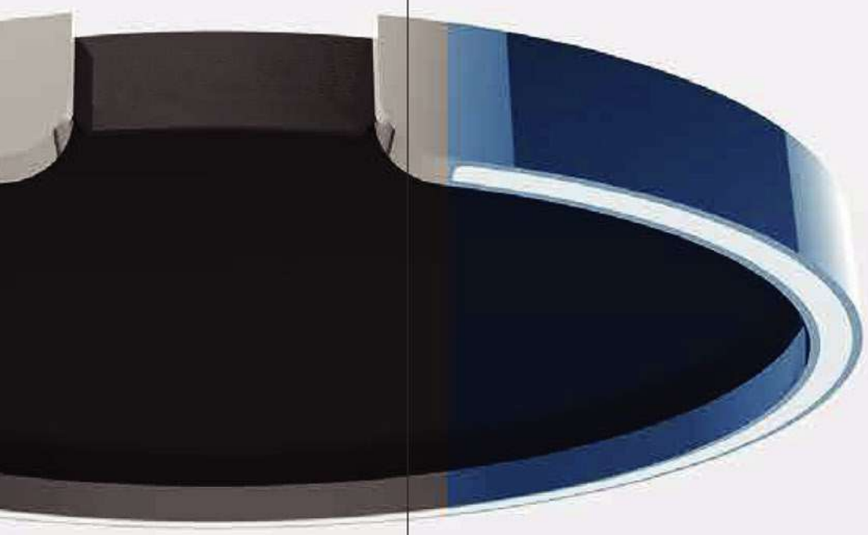


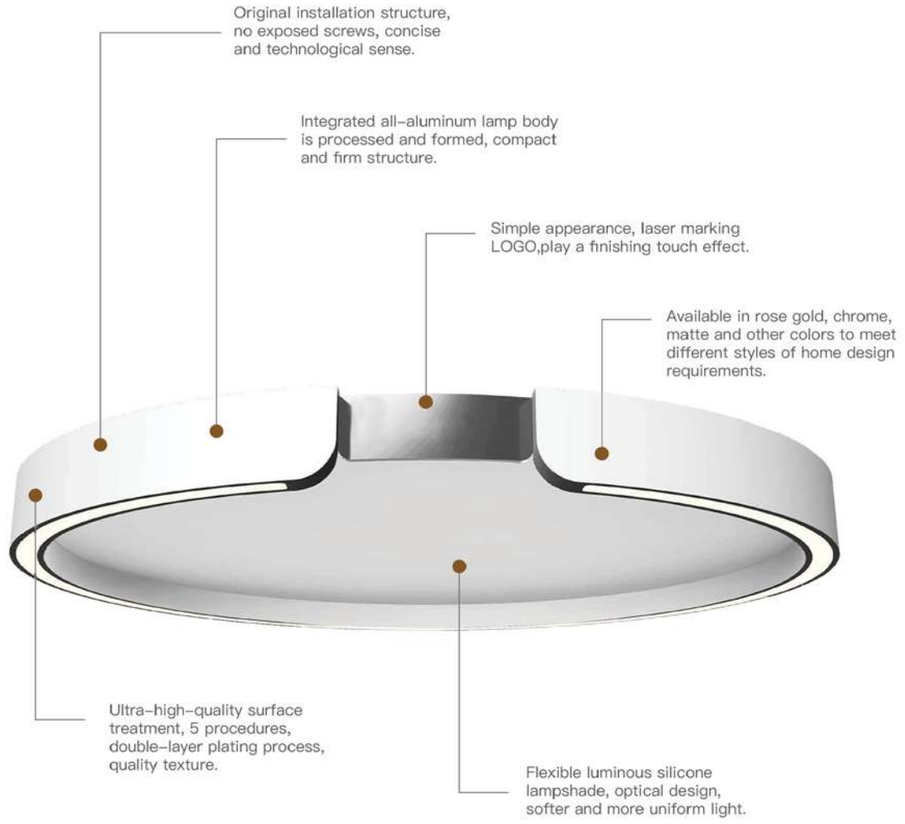



PRODUCT DESCRIPTION

Perceived light gives
the world artistic charm.

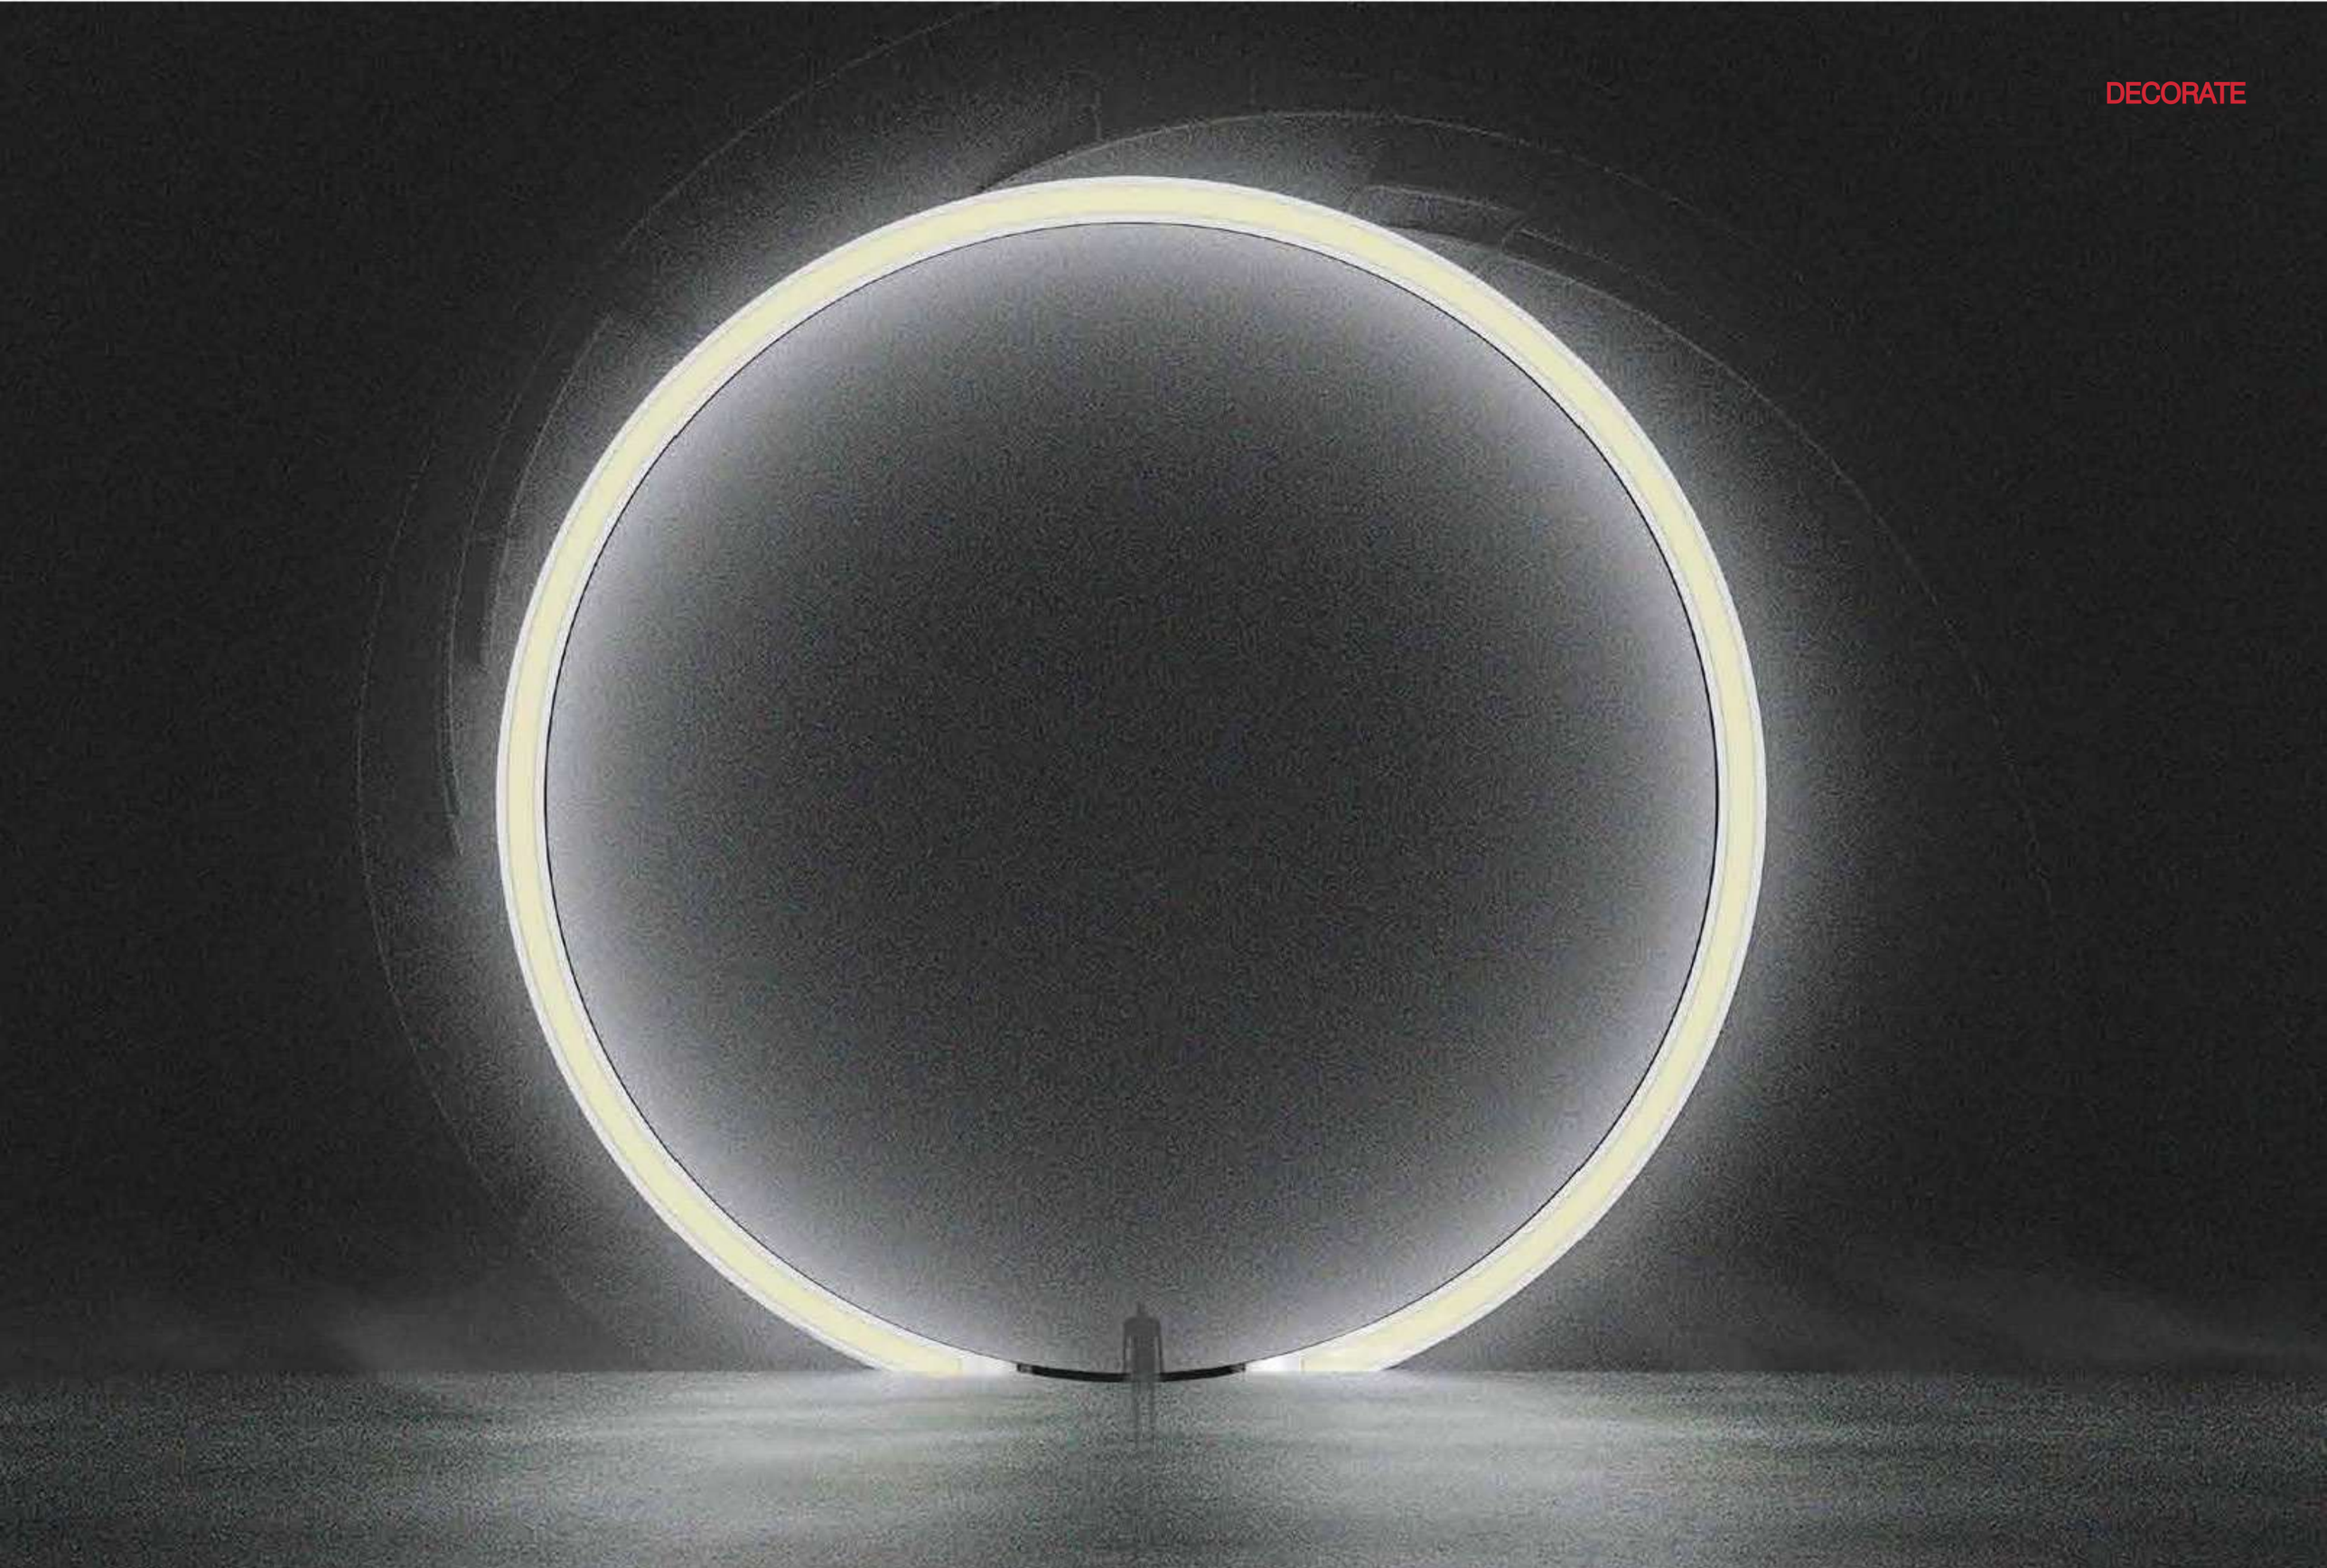




SOFT
ART
COMFORTABLE

CHARACTERISTIC



Install

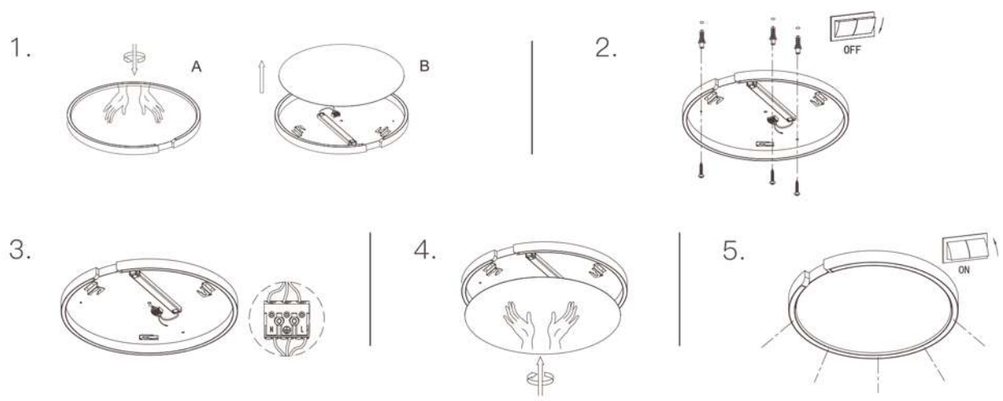

SURFACE

SCL0049-01A-024



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Ceiling lamp	Surface mount	Φ400*60	Rose Gold	IP20	24W	1680Lm	120°	2700K 4000K	Ra≥90
Other Finish	Chrome/Matte White								

SCL0049-01A-036



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Ceiling lamp	Surface mount	Φ580*60	Matte White	IP20	36W	2520Lm	120°	2700K 4000K	Ra≥90
Other Finish	Rose Gold/Chrome								

CRESCENT SERIES

C-shaped ceiling light



Characteristic

IP20 | HIGH CRI | LDT | 3D | RFA

[Crescent Series] C-shaped ceiling light,The design inspiration comes from a crescent moon, which means that a beautiful hope is coming, giving people infinite hope, and setting out a soft and comfortable home art atmosphere.

Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.

Integrated aluminum lamp body precision processing, compact and reliable structure.

Ultra-high-quality surface treatment, 5 procedures, double-layer electroplating process, high-quality texture.

German craft optical lens, precise optical design, high transmittance material, to ensure perfect spot effect.

International top-level AC-COB light source configuration, integrated design of drive power and light source, more stable, safer and more reliable.



Exquisite and round design, perfect combination of aesthetics and engineering.

Simple installation structure, stable and safe.



Exquisite packaging and display, thoughtful design, so that every time a customer opens a product, it is full of ritual.

PRODUCT DESCRIPTION

Perceived light gives
the world artistic charm






COMFORTABLE SOFT DESIGN

CHARACTERISTIC






Install

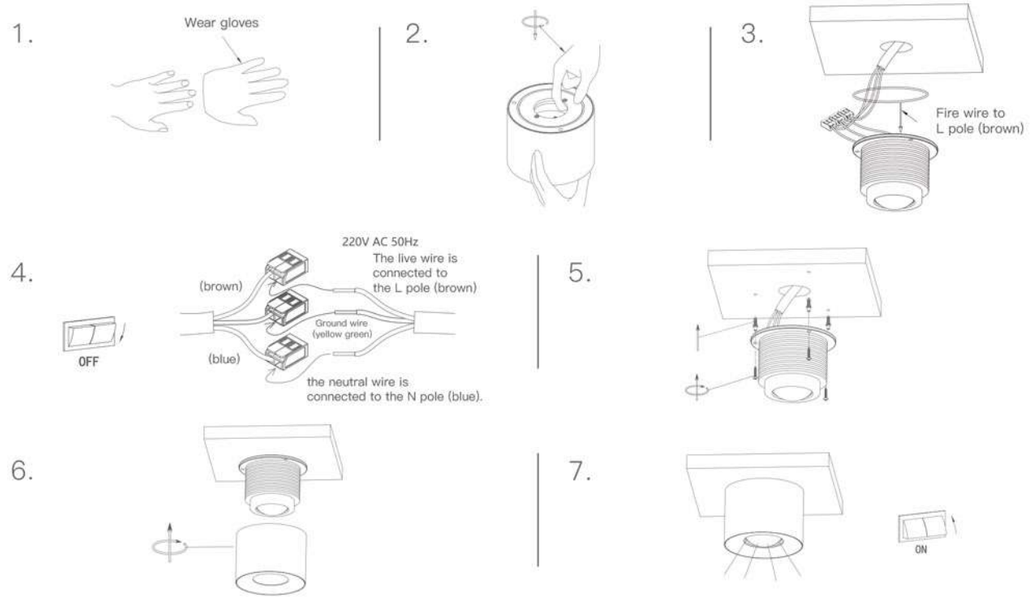

Install

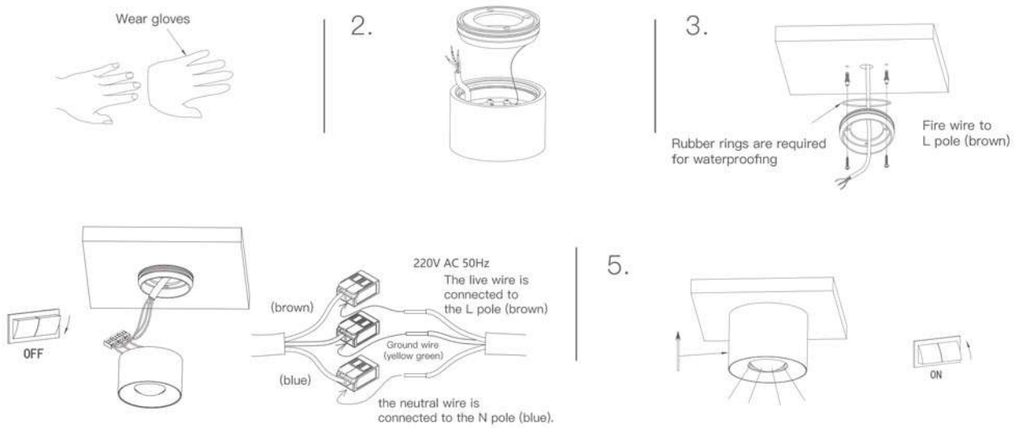

SCL0046-01A-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Surface mounted downlight	Surface mount	Φ80*48	Chrome	IP20	8W	290Lm	70°	2700K 4000K 5000K	Ra≥90
Other Finish	Rose Gold/Sand white/Bright black								

SDL0046-01A-012



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Surface mounted downlight	Surface mount	Φ110*80	Chrome	IP20	12W	560Lm	70°	2700K 4000K 5000K	Ra≥90
Other Finish	Rose Gold/Sand white/Bright black								

MAGIC MIRROR SERIES

Surface mounted convex lens downlight



Characteristic



[Magic mirror series] Surface mounted convex lens downlight, he appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.







Luminous angle

LED / 8W

LED / 12W

UNMATCHED LIGHT EFFECT PERFORMANCE

GERMAN CRAFT OPTICAL LENS, PRECISE OPTICAL DESIGN

The lighting quality of the art gallery level, the perfect combination of craftsmanship and art, meets the highest demands of function and aesthetics.

With the perfect combination of craftsmanship and art, create a museum-level space experience.





Wide light distribution
70°

THE ART OF MINIMALISM

LIGHTING



Exquisite and round design, perfect combination of aesthetics and engineering.
Ultra-high-quality surface treatment, 5 procedures,
double-layer electroplating process, high-quality texture.



LIGHTING SCHEME


Feel the simple beauty of space

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restau–rants, bars, and hotel clubs.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space, Rigart Light provides the best solution for home space.
2.艺术空间



Hotel club lighting design is the best way to show the style and taste of hotel clubs. Lighting must not only consider functionality, but also consider the integra–tion of artistry and style. Rigart Light creates an exclusive artistic atmosphere for the hotel club.



In addition to highlighting the characteristics of the brand, the lighting can also reflect the best visual effects of the display, expressing the characteristics of the product, allowing consumers to stop and have a good impression on the store. Rigart illuminates exclusive lighting aesthetics for brand stores.




The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.

COMFORTABLE
ART
ELEGANT

CHARACTERISTIC




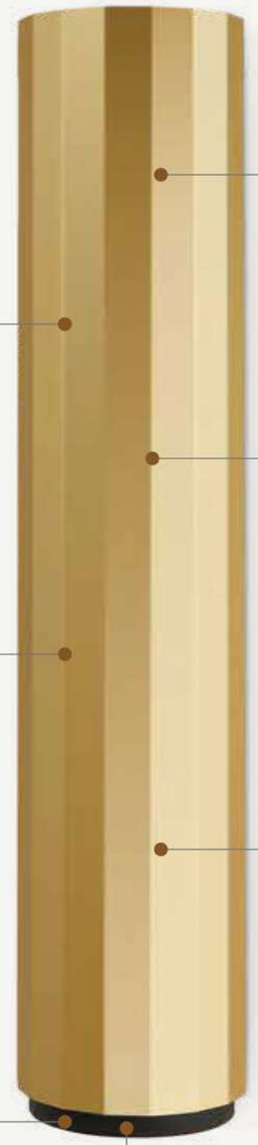








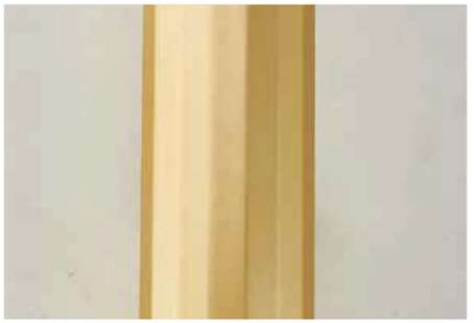

PRODUCT DESCRIPTION

Perceived light gives
the world artistic charm.

Install

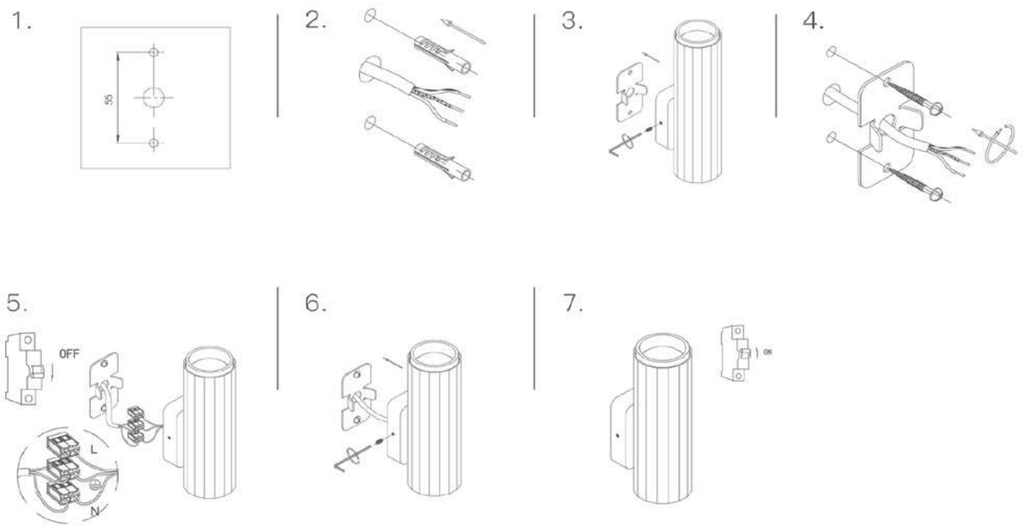

SWA0041-01A-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	160*50*68	Green gold	IP20	8W	300Lm	80°	2700K 4000K	Ra>90
Other Finish	Matte white/Matte Black								

SWA0041-01B-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	210*50*68	Green gold	IP20	8W	300Lm	80°	2700K 4000K	Ra>90
Other Finish	Matte white/Matte Black								

SWA0041-01C-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	260*50*68	Green gold	IP20	8W	300Lm	80°	2700K 4000K	Ra>90
Other Finish	Matte white/Matte Black								

SWA0041-01D-008




Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Recessed	310*50*68	Green gold	IP20	8W	300Lm	80°	2700K 4000K	Ra>90
Other Finish	Matte white/Matte Black								




CHARACTERISTIC


COMFORTABLE ART ELEGANT

DIAMOND

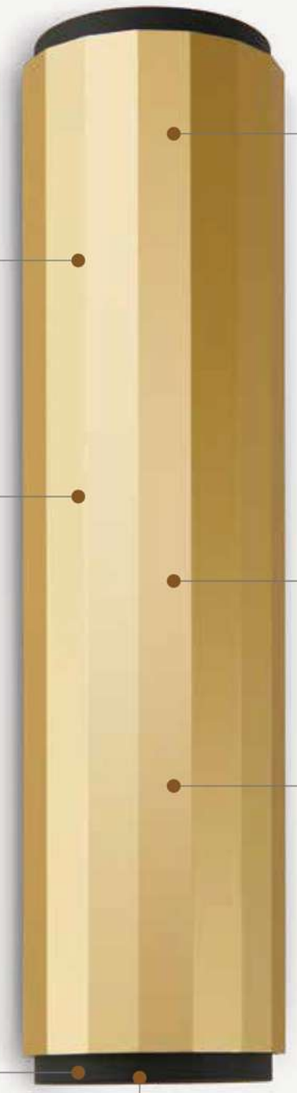

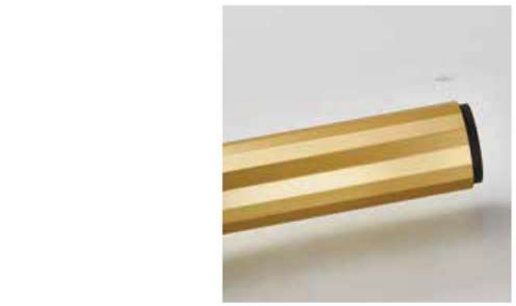



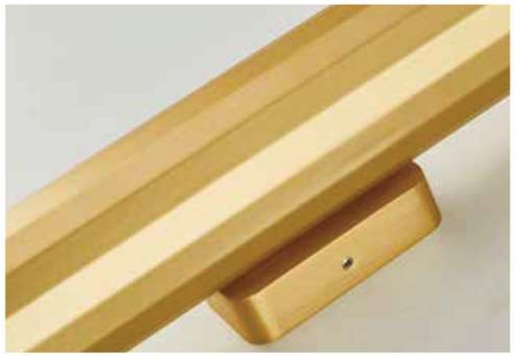




PRODUCT DESCRIPTION

Perceived light gives
the world artistic charm.



Install

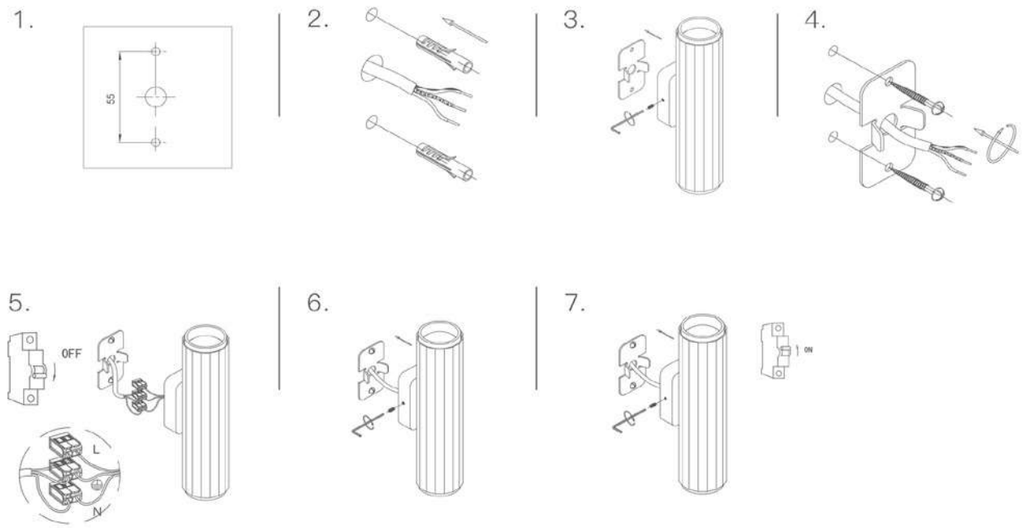

SWA0041-01A-016



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	210*50*68	Green gold	IP20	16W	540Lm	80°	2700K 4000K	Ra≥90
Other Finish	Matte white/Matte Black								

SWA0041-01B-016



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	310*50*68	Green gold	IP20	16W	540Lm	80°	2700K 4000K	Ra≥90
Other Finish	Matte white/Matte Black								

SWA0041-01C-016



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	410*50*68	Green gold	IP20	16W	540Lm	80°	2700K 4000K	Ra≥90
Other Finish	Matte white/Matte Black								

SWA0041-01D-016



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	510*50*68	Green gold	IP20	16W	540Lm	80°	2700K 4000K	Ra≥90
Other Finish	Matte white/Matte Black								

MAGIC MIRROR SERIES

Convex lens wall light



Characteristic

IP20 | HIGH CRI | A++ | LDT | 3D | RFA | 350°

[Magic mirror series] Convex lens wall light, the appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.



Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.





Luminous angle

— LARGE CONVEX LENS WALL LIGHT




LED / 4Wx2

LED / 6Wx2

UNMATCHED LIGHT EFFECT PERFORMANCE

THE ART OF MINIMALISM

LIGHTING

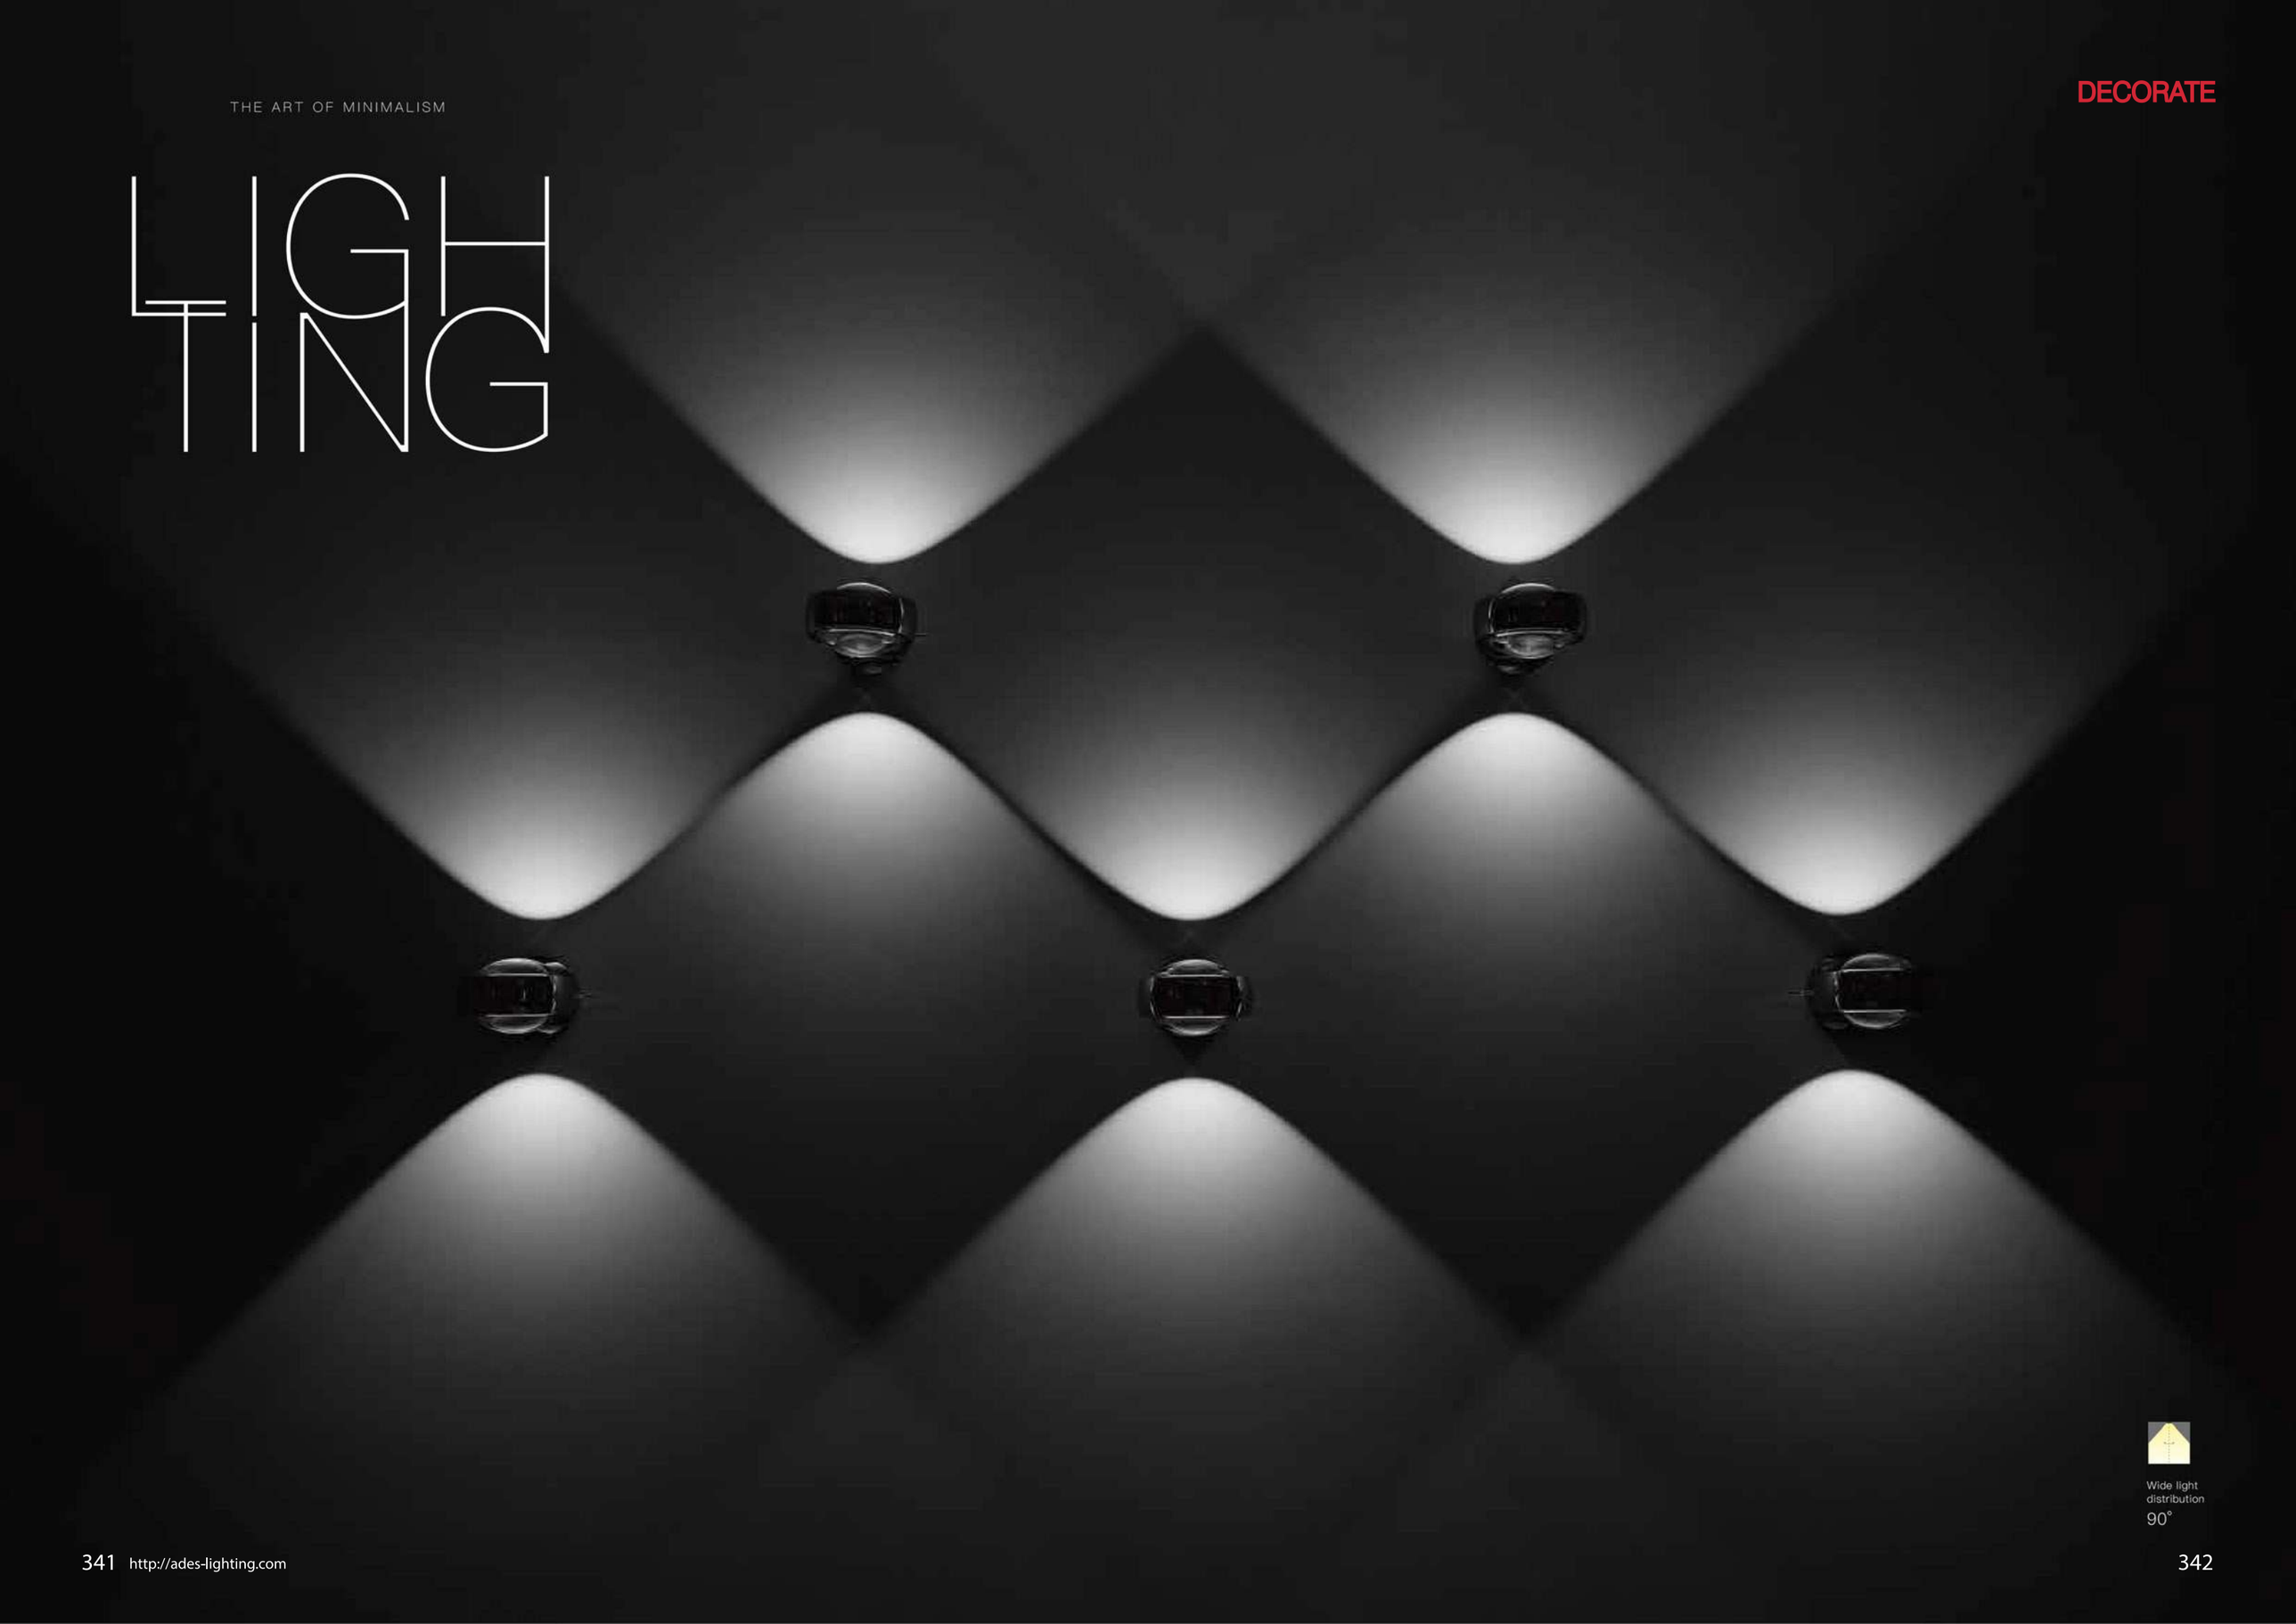

Wide light
distribution
90°



LIGHTING SCHEME

Feel the simple beauty of space

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space, Rigart Light provides the best solution for home space.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart tailored a reasonable, healthy and comfortable light environment for the office.



Each piece of art is the crystallization of tempering thoughts. Under the light, its artistic beauty penetrates the heart and soul, and instantly fills the space with inspiration. Rigart creates exclusive lighting aesthetics for the art space.




The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.

PRODUCT DESCRIPTION

Perceived light gives
the world artistic charm

350 degree rotation design, easy to achieve artistic lighting effects.

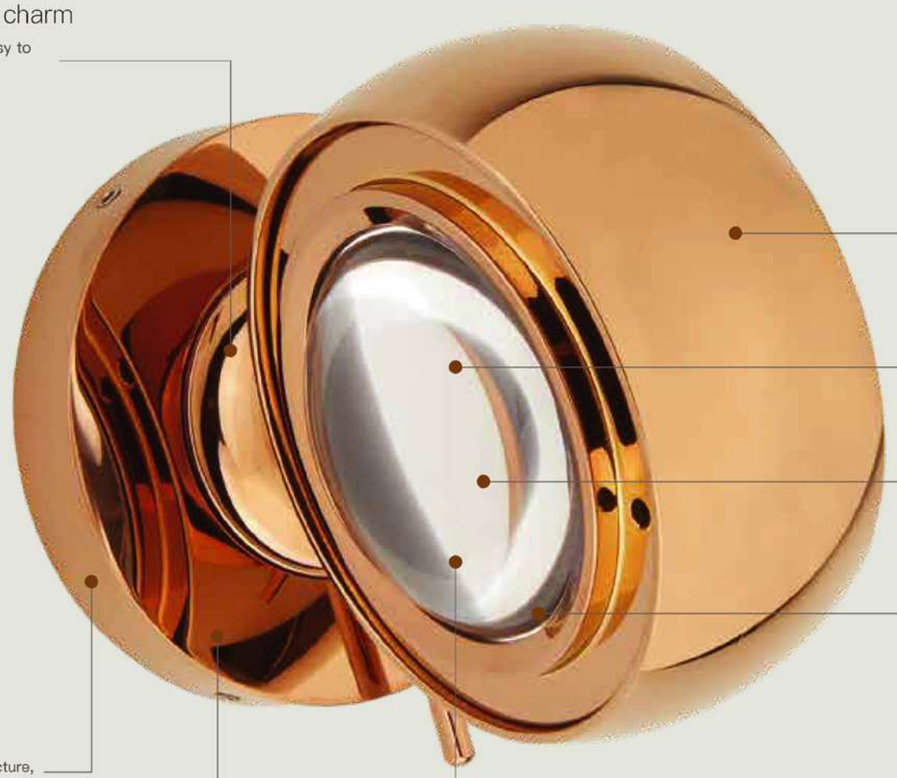

Exquisite and round design, perfect combination of aesthetics and engineering.

Integrated aluminum lamp body precision processing, compact and reliable structure.


Ultra-high-quality surface treatment, 5 procedures, double-layer electroplating process, high-quality texture.

International top-level AC-COB light source configuration, integrated design of drive power and light source, more stable, safer and more reliable.

Simple installation structure, stable and safe.

Exquisite packaging and display, thoughtful design, so that every time a customer opens a product, it is full of ritual.

German craft optical lens, precise optical design, high transmittance material, to ensure perfect spot effect.





MAGIC MIRROR SERIES

The appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.




COMFORTABLE SOFT DESIGN

CHARACTERISTIC



Install

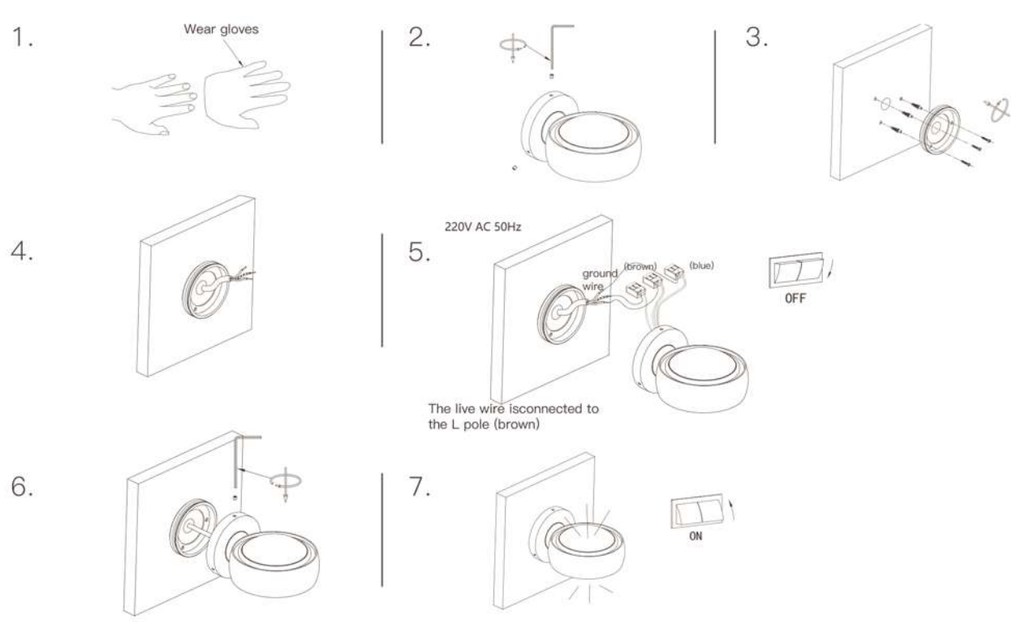

SWA0042-01A-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT
Wall lamp	Surface mount	105.6*80*34	Chrome	IP20	4Wx2	290Lm	90°	2700K 4000K 5000K
Finish Other	Sand white/Bright black							

SWA0042-01B-012



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT
Wall lamp	Surface mount	142.6*120*40	Chrome	IP20	6Wx2	410Lm	90°	2700K 4000K 5000K
Other Finish	Rose Gold/Sand white/Bright black							

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.



Narrow light Wide light Extremely wide light



LED / 5W

UNMATCHED LIGHT EFFECT PERFORMANCE

THE LIGHT IS SOFT AND NATURAL LIKE WATER SEEPING OUT

The outer surface is designed with edges, and the outline is clear. Multiple edges make the product more agile and full of line.





Narrow light distribution 15°

Naka Hirohikaru matching light 24°

Wide light distribution 36°

VISUAL COMFORT

More natural soft beam, more beautiful artistic atmosphere



Light effect is natural, comfortable, soft and even, let you indulge in the atmosphere full of artistic beauty

Commercial Lighting



2700K

Warm light is suitable for warm and quiet environments such as restaurants, hotels, cafes, and private clubs.



4000K

Neutral light is close to natural light, which is suitable for places such as living room and lobby that need warm white light.



5000K

Cold white light is like the bright sun at noon, which has high lumen and color rendering, and has a wide range of applications.

710lm **/Model**

Provide a wide range of luminous power levels and beam angles, making it suitable for uniform lighting design of facades of different heights

710 lm

—

Reference neutral white model

710 lm	Ø55, 103, 308	**5W**
710 lm	Ø55, 103, 308	**5W**
710 lm	Ø55, 103, 408	**5W**
710 lm	Ø55, 103, 508	**5W**

The value of the flux and power of the beam is rated.

LIGHTING SCHEME

Feel the simple beauty of space



DECORATE

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space, Rigart Light provides the best solution for home space.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.



In addition to highlighting the characteristics of the brand, the lighting can also reflect the best visual effects of the display, expressing the characteristics of the product, allowing consumers to stop and have a good impression on the store. Rigart illuminates exclusive lighting aesthetics for brand stores.




Each piece of art is the crystallization of tempering thoughts. Under the light, its artistic beauty penetrates the heart and soul, and instantly fills the space with inspiration. Rigart creates exclusive lighting aesthetics for the art space.



PRODUCT DESCRIPTION

Perceived light gives
the world artistic charm.

Perceive the artistic
charm of the world

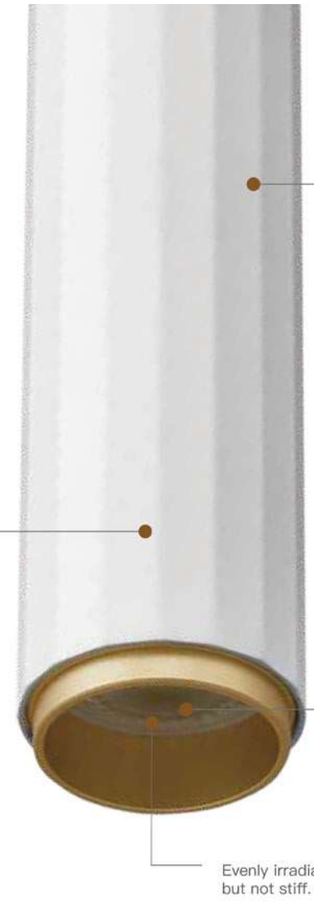

The outer surface is designed with edges, and the outline is clear. Multiple edges make the product more agile and full of line.


Appearance color contrast
Pantone color card, blending with the light luxury style and simple style in home decoration.

Different from traditional spotlights, the light is soft and natural like water seeping out.


Evenly irradiated, natural but not stiff.





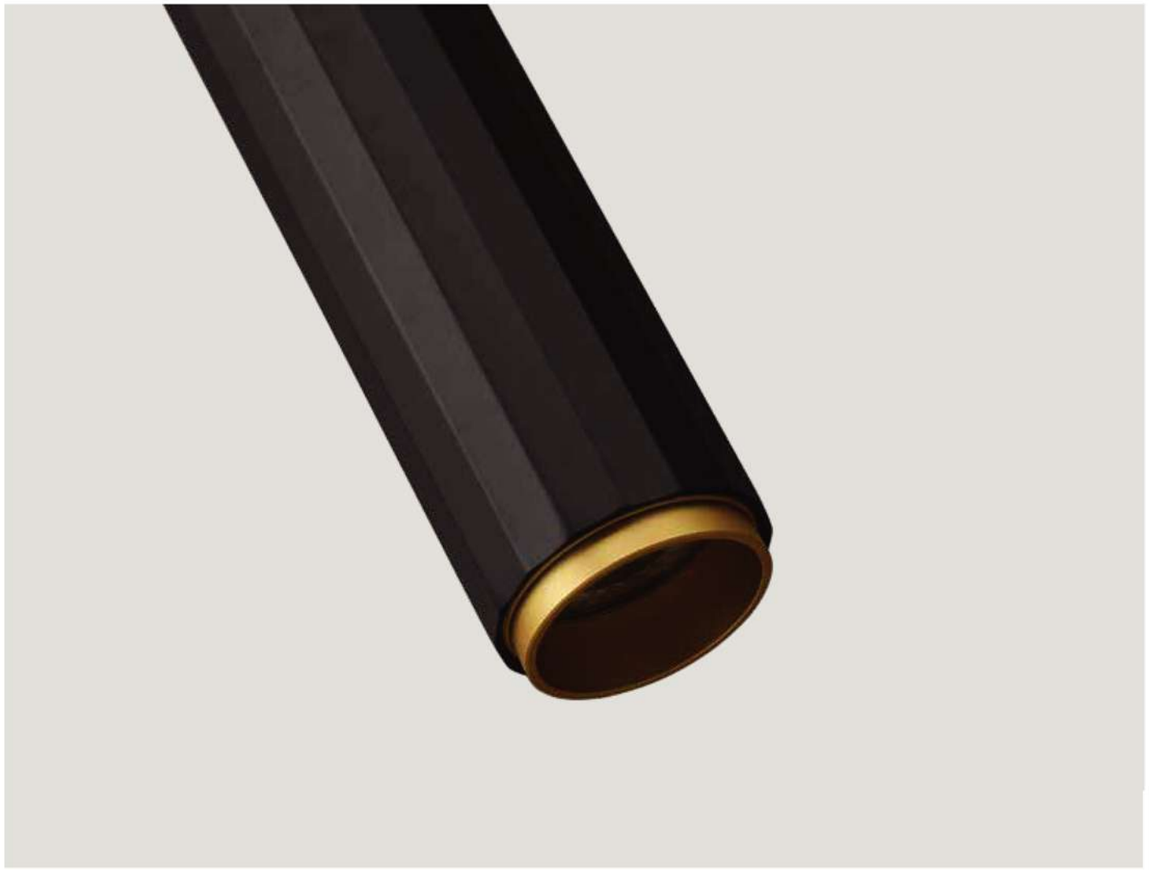

Install

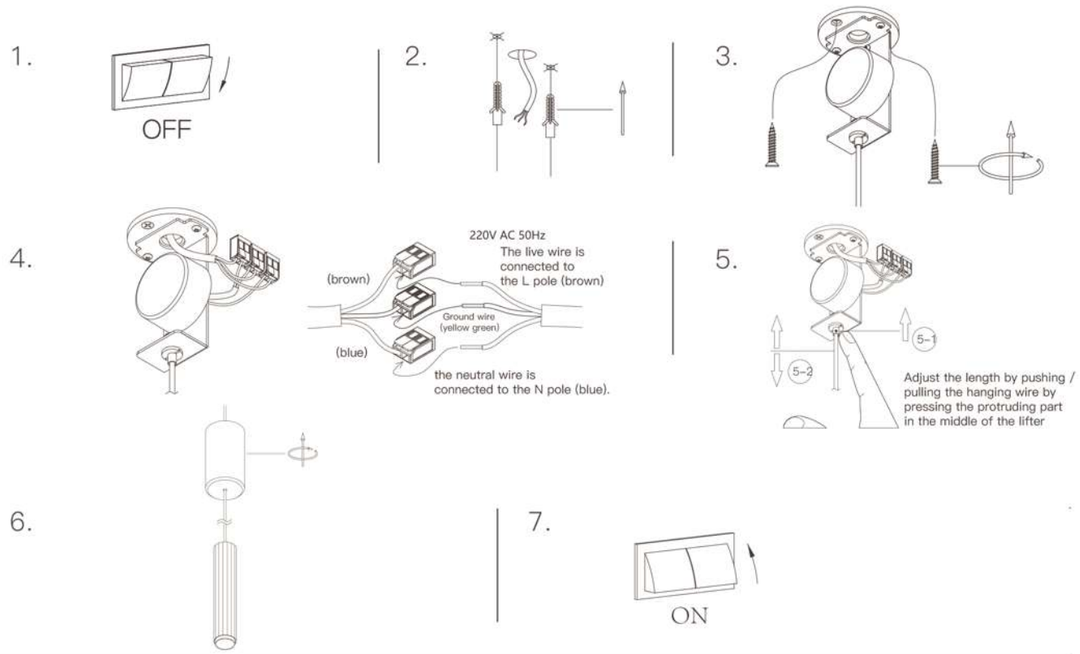

PENDANT

SPL0010-01A-005



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Pendant lamp	Surface mount	Φ55*2200	White + Gold	IP20	5W	710Lm	15°/24°/36°	2700K 4000K 5000K	Ra≥90
Other Finish	White + Black/Black + Gold/Black + Black/Gold + Black								

SPL0010-01B-005



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Pendant lamp	Surface mount	Φ55*2300	Gold + Black	IP20	5W	710Lm	15°/24°/36°	2700K 4000K 5000K	Ra≥90
Other Finish	White + Gold/Black + Gold/Black + Black/Gold + Black								

SPL0010-01C-005



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Pendant lamp	Surface mount	Φ55*2400	Black + Gold	IP20	5W	710Lm	15°/24°/36°	2700K 4000K 5000K	Ra≥90
Other Finish	White + Black/White + Gold/Black + Gold/Black + Black								

SPL0010-01D-005

Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Pendant lamp	Surface mount	Φ55*2500	White + Black	IP20	5W	710Lm	15°/24°/36°	2700K 4000K 5000K	Ra≥90
Other Finish	White + Gold/Black + Gold/Black + Black/Gold + Black								

EXPLORE SERIES

Flashlight chandelier



Characteristic




[Explore series] Flashlight chandelier, the unique appearance design pays tribute to the early days of the development of the lamp design. The necessary flashlight to go out is retro and modern industrial style with unique charm.



Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.

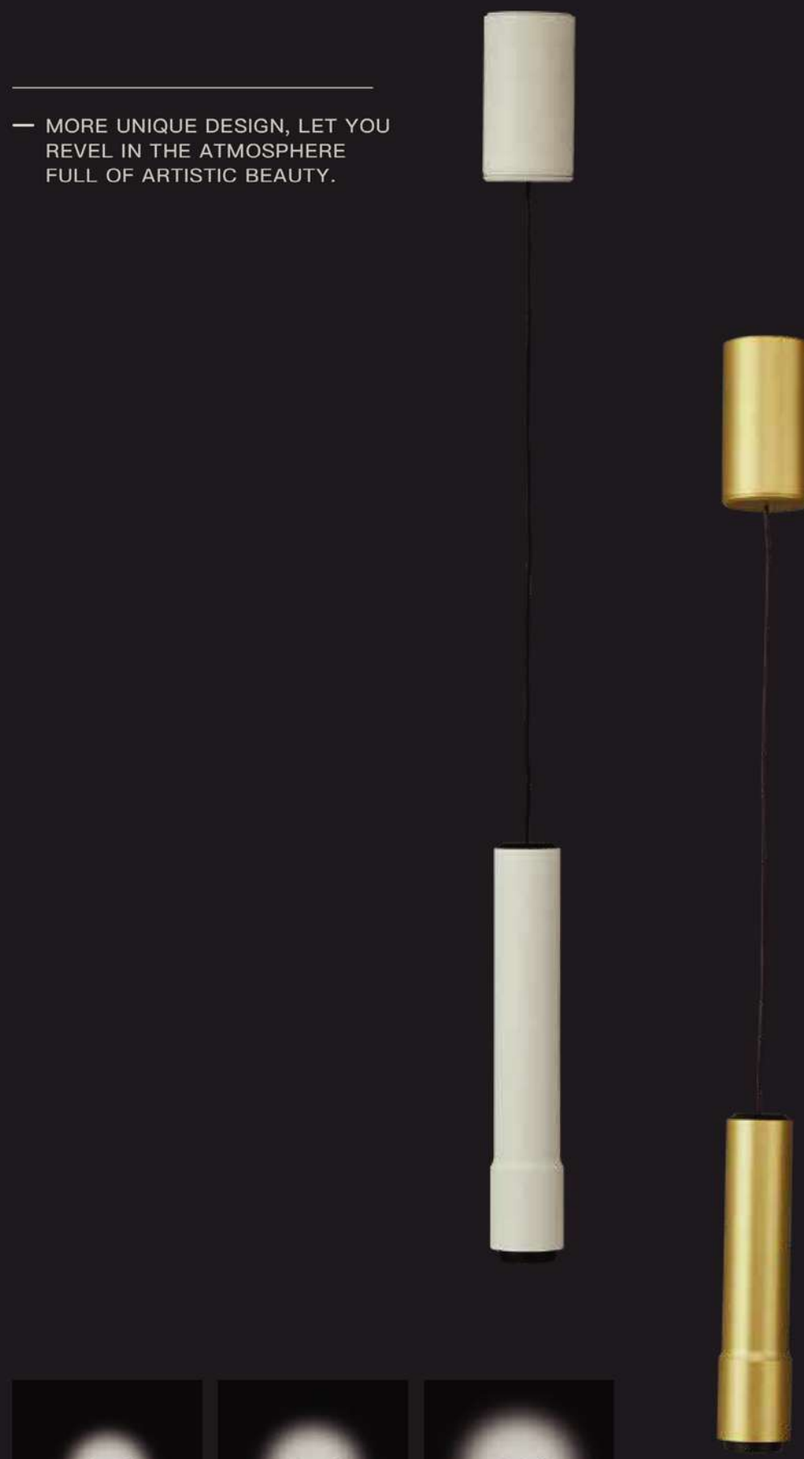

Narrow light Wide light Extremely wide light



LED / 5W

UNMATCHED LIGHT
EFFECT
PERFORMANCE

LIGHTING SCHEME

Feel the simple beauty of space

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restau–rants, bars, and hotel clubs.



Hotel club lighting design is the best way to show the style and taste of hotel clubs. Lighting must not only consider functionality, but also consider the integration of artistry and style. Rigart Light creates an exclusive artistic atmosphere for the hotel club.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space, Rigart Light provides the best solution for home space.




In addition to highlighting the characteristics of the brand, the lighting can also reflect the best visual effects of the display, expressing the characteristics of the product, allowing consumers to stop and have a good impression on the store. Rigart illuminates exclusive lighting aesthetics for brand stores.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart tailored a reasonable, healthy and comfortable light environment for the office.





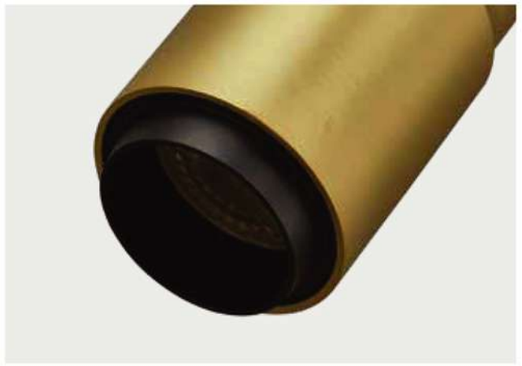





PRODUCT DESCRIPTION

Perceived light gives
the world artistic charm.



DSEIGN
INDUSTRIAL WIND
SIMPLE

CHARACTERISTIC





THE LIGHT IS SOFT AND NATURAL LIKE WATER SEEPING OUT

Unique flashlight-like design, retro and modern industrial style, can be used in LOFT style space



Narrow light distribution
15°

Naka Hirohikaru matching light
24°

Wide light distribution
36°

MAGIC MIRROR SERIES

Convex lens chandelier



Characteristic

IP20 | HIGH CRI | LDT | 3D | RFA

[Magic mirror series] Convex lens chandelier, the appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.



Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.

— LARGE CONVEX LENS CHANDELIE





Luminous angle

LED / 12W

UNMATCHED LIGHT EFFECT PERFORMANCE

GERMAN CRAFT OPTICAL LENS, PRECISE OPTICAL DESIGN

The lighting quality of the art gallery level, the perfect combination of craftsmanship and art, meets the highest demands of function and aesthetics.

With the perfect combination of craftsmanship and art, create a museum-level space experience.






Wide light distribution
90°

Comfortable

DESIGN

Exquisite and round design, perfect combination of aesthetics and engineering.Ultra-high-quality surface treatment, 5 procedures, double-layer electroplating process, high-quality texture.

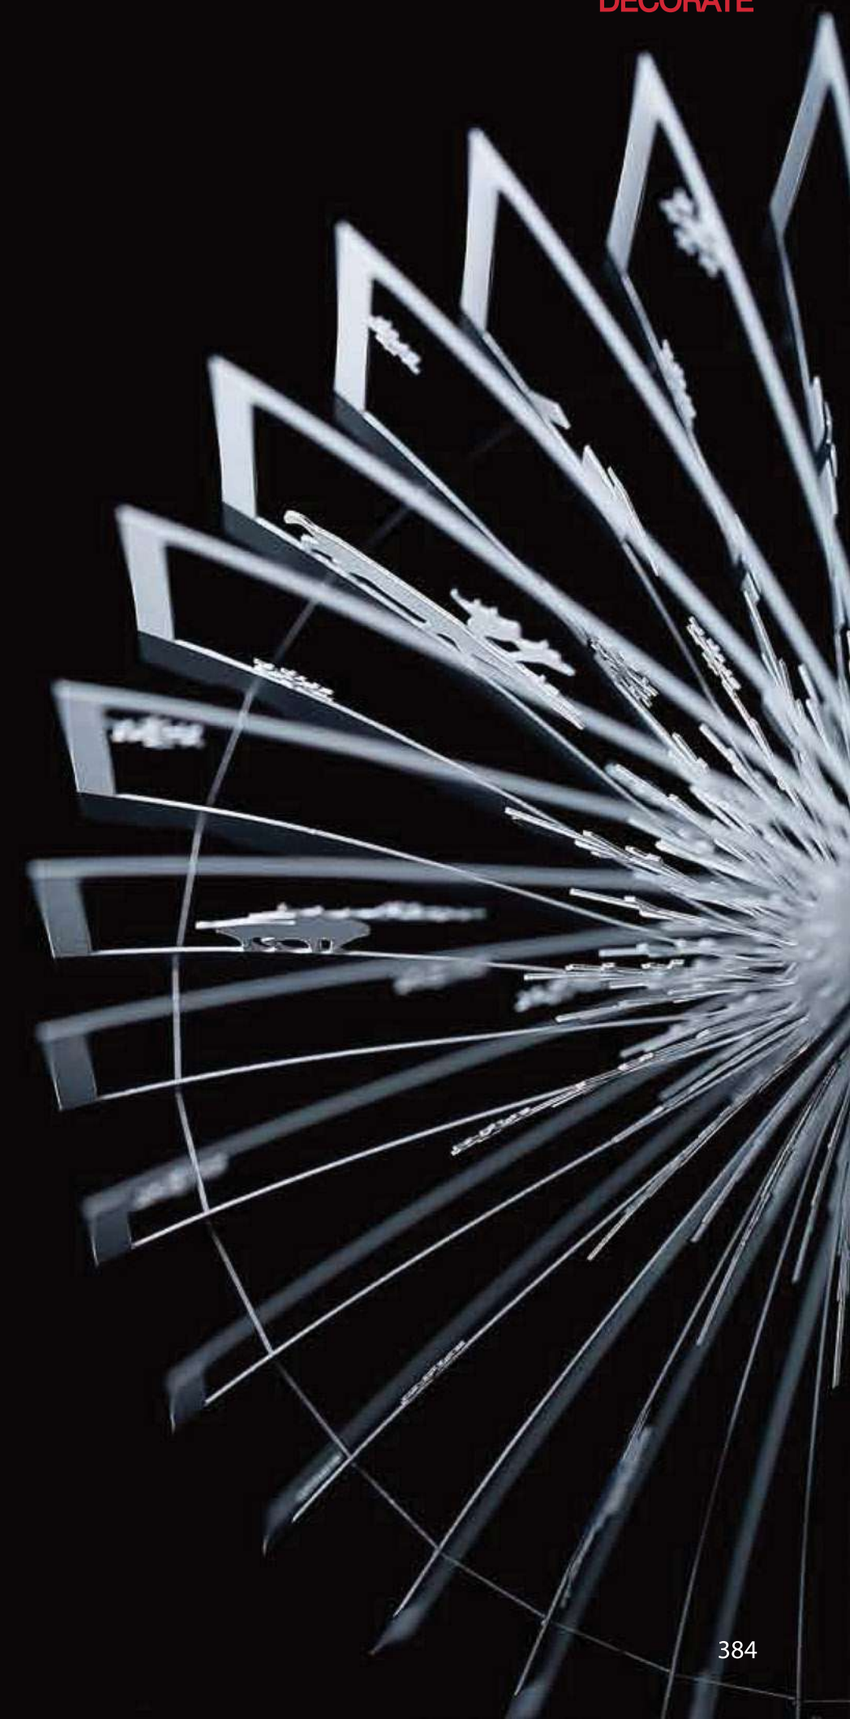

LIGHTING SCHEME

Feel the simple beauty of space

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space, Rigart Light provides the best solution for home space.



Each piece of art is the crystallization of tempering thoughts. Under the light, its artistic beauty penetrates the heart and soul, and instantly fills the space with inspiration. Rigart creates exclusive lighting aesthetics for the art space.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart tailored a reasonable, healthy and comfortable light environment for the office.



PRODUCT DESCRIPTION

Perceived light gives
the world artistic charm



Perceive the artistic
charm of the world





MAGIC MIRROR SERIES

The appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.



MAGIC MIRROR SERIES



DESIGN
SOFT
COMFORTABLE

CHARACTERISTIC





SPL0042-01B-012



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous Flux	Beam Angle	CCT	CRI
Pendant Lamp	Surface Mount	Ø120x1200	Chrome	IP20	12W	860lm	90°	2700K 4000K 5000K	Ra≥90
Other Finish	Rose Gold/ Brushed Gold/ Black Plating								

SPL0025-01A-018



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous Flux	Beam Angle	CCT	CRI
Pendant Lamp	Surface Mount	Ø120x1200	Chrome	IP20	18W	860lm	90°	2700K 4000K 5000K	Ra≥90
Other Finish	Rose Gold/ Brushed Gold/ Black Plating								

MAGIC MIRROR SERIES

Convex lens spotlight



19


Characteristic

IP20 | HIGH CRI | LDT | 3D | RFA | 90°

[Magic mirror series] Convex lens spotlight, the appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.

Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.



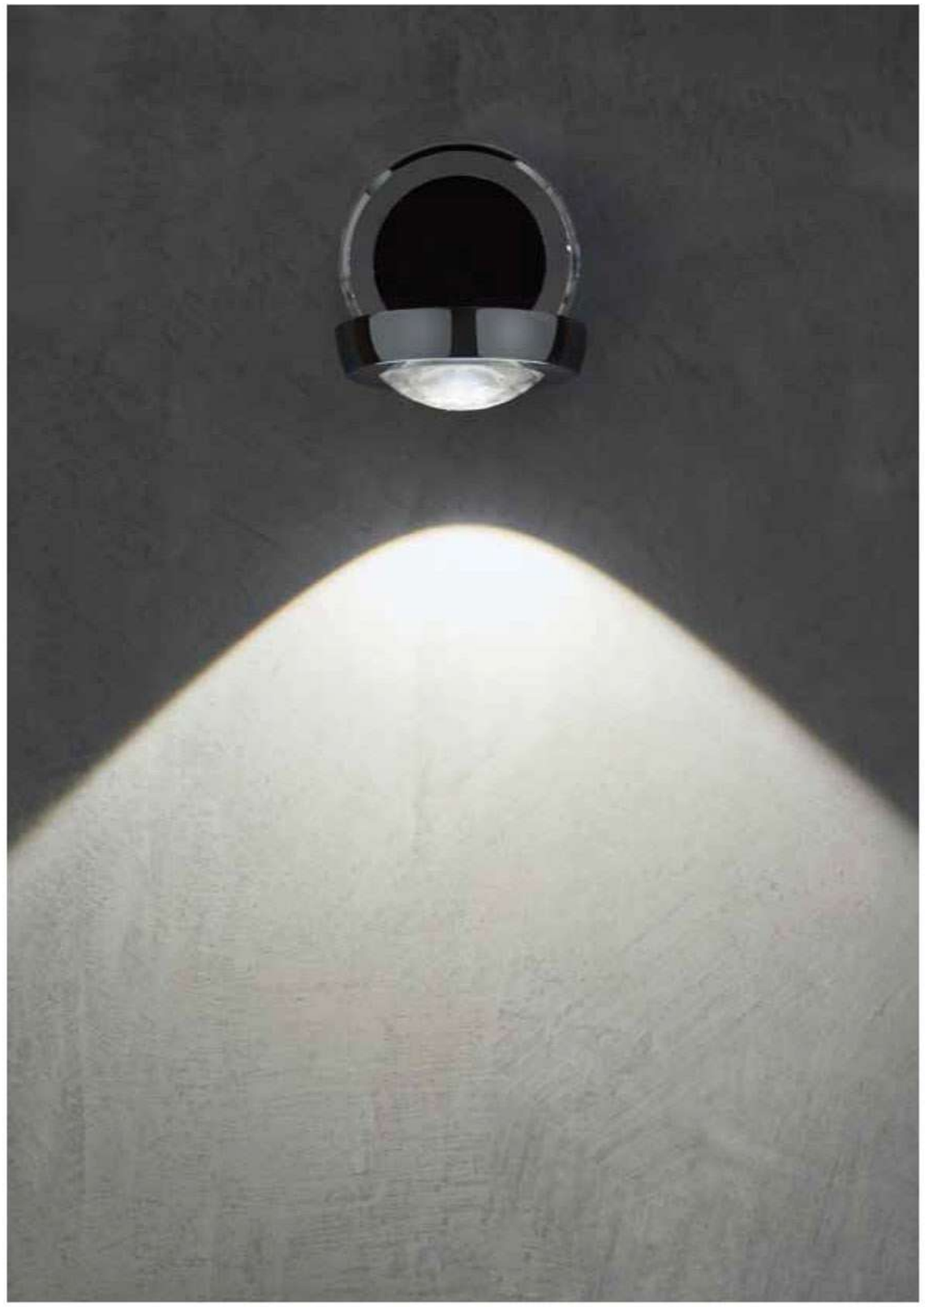

With the perfect combination of
craftsmanship and art,
create a museum-level space experience.


GERMAN CRAFT OPTICAL LENS, PRECISE OPTICAL DESIGN

The lighting quality of the art gallery level, the perfect combination of craftsmanship and art, meets the highest demands of function and aesthetics.





Wide light distribution
90°

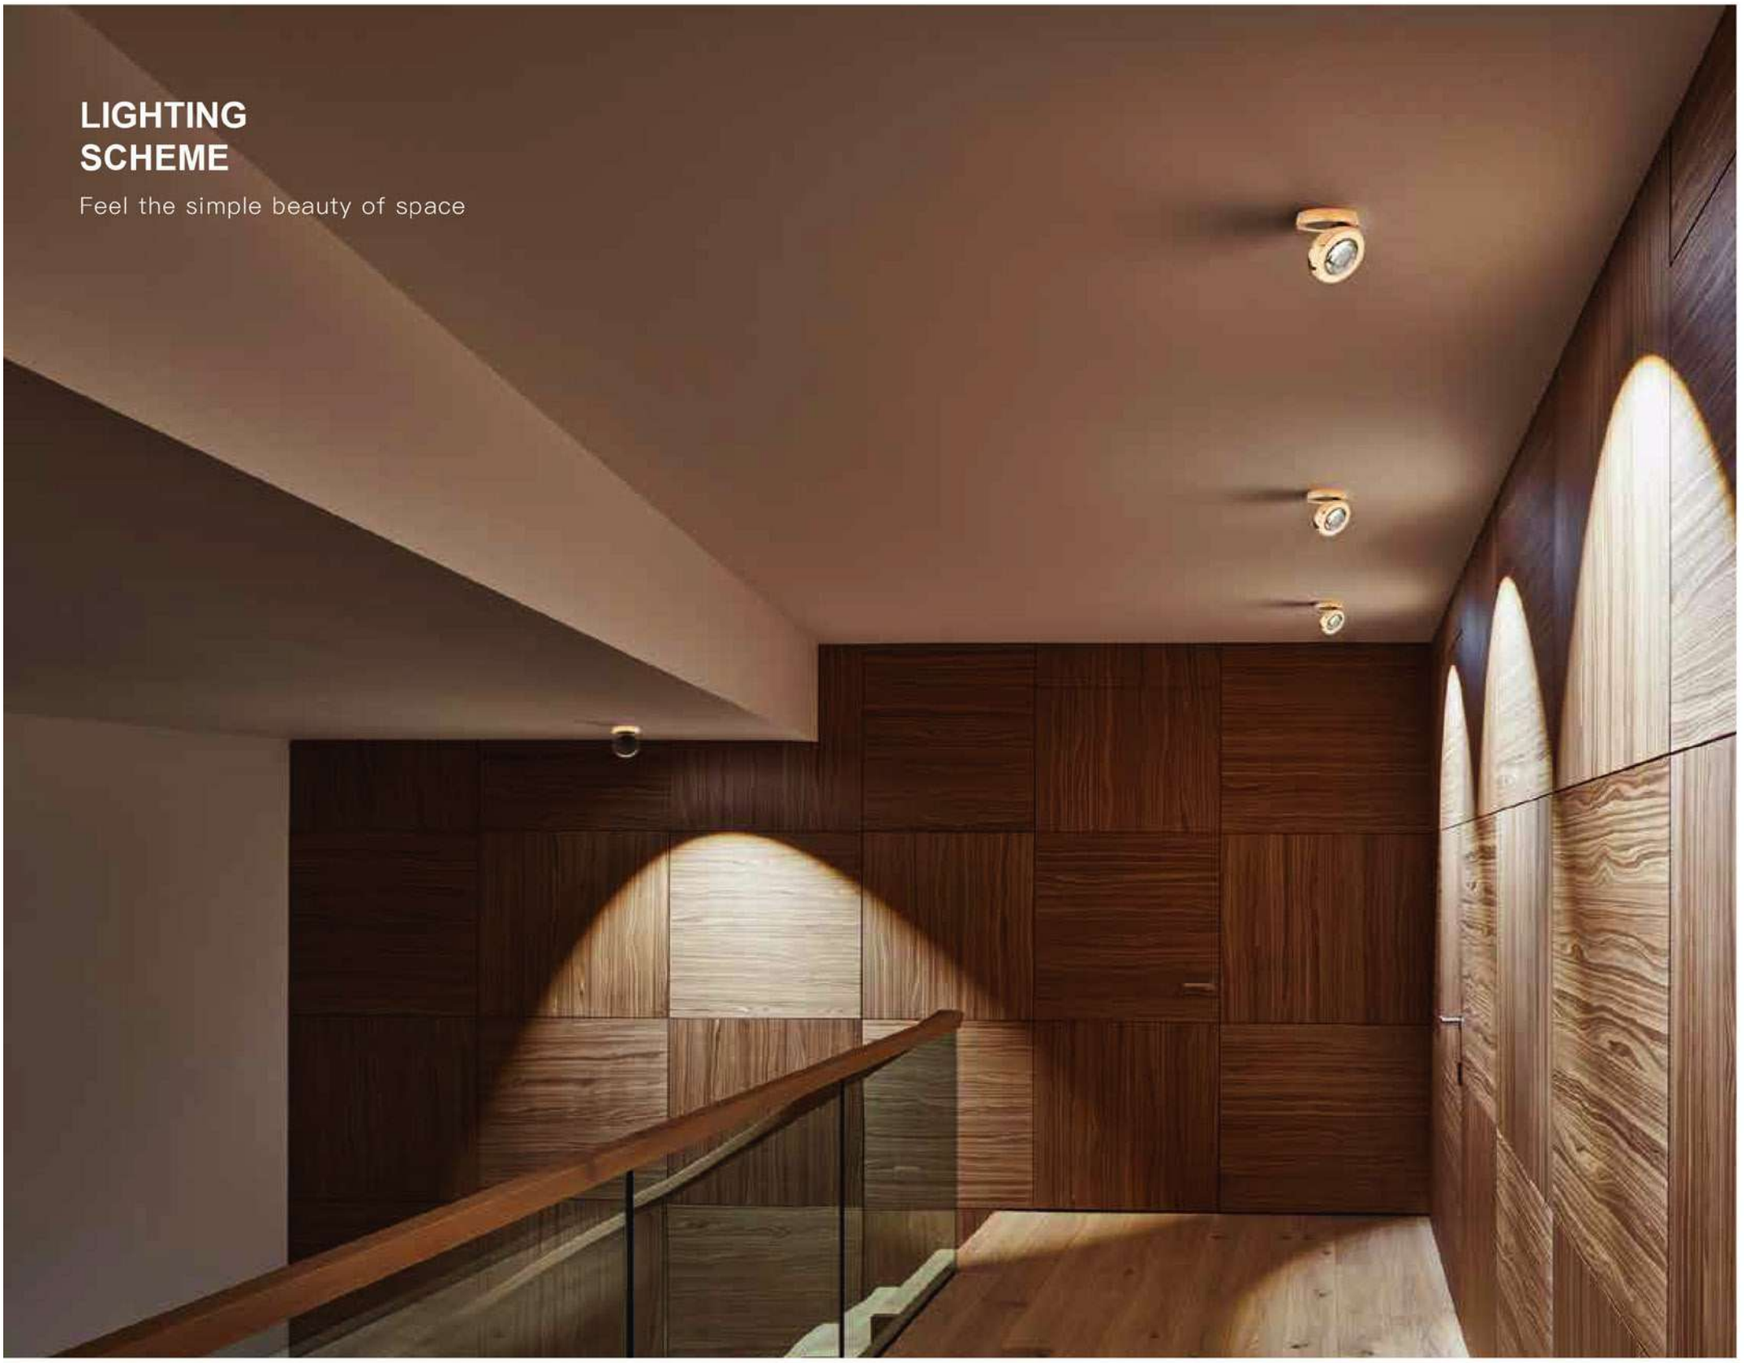

LIGHTING SCHEME

Feel the simple beauty of space

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Each piece of art is the crystallization of tempering thoughts. Under the light, its artistic beauty penetrates the heart and soul, and instantly fills the space with inspiration. Rigart creates exclusive lighting aesthetics for the art space.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space, Rigart Light provides the best solution for home space.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart tailored a reasonable, healthy and comfortable light environment for the office.

Exquisite and round design, perfect combination of aesthetics and engineering.

International top-level AC-COB light source configuration, integrated design of drive power and light source, more stable, safer and more reliable.

German craft optical lens, precise optical design, high transmittance material, to ensure perfect spot effect.

Ultra-high-quality surface treatment, 5 procedures, double-layer electroplating process, high-quality texture.

Rotate 350 degrees horizontally, swing up and down 90 degrees, universal angle adjustment function, dual-use ceiling / wall mount, providing more possibilities for achieving excellent lighting design.



Provide a variety of colors to meet the high-end space design requirements of different styles.

Integrated aluminum lamp body precision processing, compact and reliable structure.

Exquisite packaging and display, thoughtful design, so that every time a customer opens a product, it is full of ritual.

Simple installation structure, stable and safe.

PRODUCT DESCRIPTION

Perceived light gives
the world artistic charm







SOFT COMFORTABLE DESIGN

More natural and soft light beam, let you indulge in the atmosphere full of artistic beauty.






Install


1.




2.

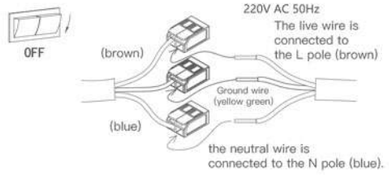

3.




4.



5.



6.



SCL0047-01A-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Surface mounted downlight	Surface mount	Φ134*75.5	Rose Gold	IP20	8W	290Lm	90°	2700K 4000K 5000K	Ra≥90
Other Finish	Chrome/Sand white/Bright black								

MAGIC MIRROR SERIES

Recessed convex lens downlight





Characteristic

IP20 | HIGH CRI | LOT | 3D | RFA

[Magic mirror series] Recessed convex lens downlight, the appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.

Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.



— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.







Luminous angle

LED / 8W

LED / 16W

UNMATCHED LIGHT
EFFECT
PERFORMANCE

GERMAN CRAFT
OPTICAL LENS,
PRECISE OPTICAL DESIGN

The lighting quality of the art gallery level, the perfect combination of craftsmanship and art, meets the highest demands of function and aesthetics.

With the perfect combination of craftsmanship and art, create a museum-level space experience.






Wide light distribution
90°



Comfortable

DESIGN

Exquisite and round design, perfect combination of aesthetics and engineering.Ultra-high-quality surface treatment, 5 procedures, double-layer electroplating process, high-quality texture.

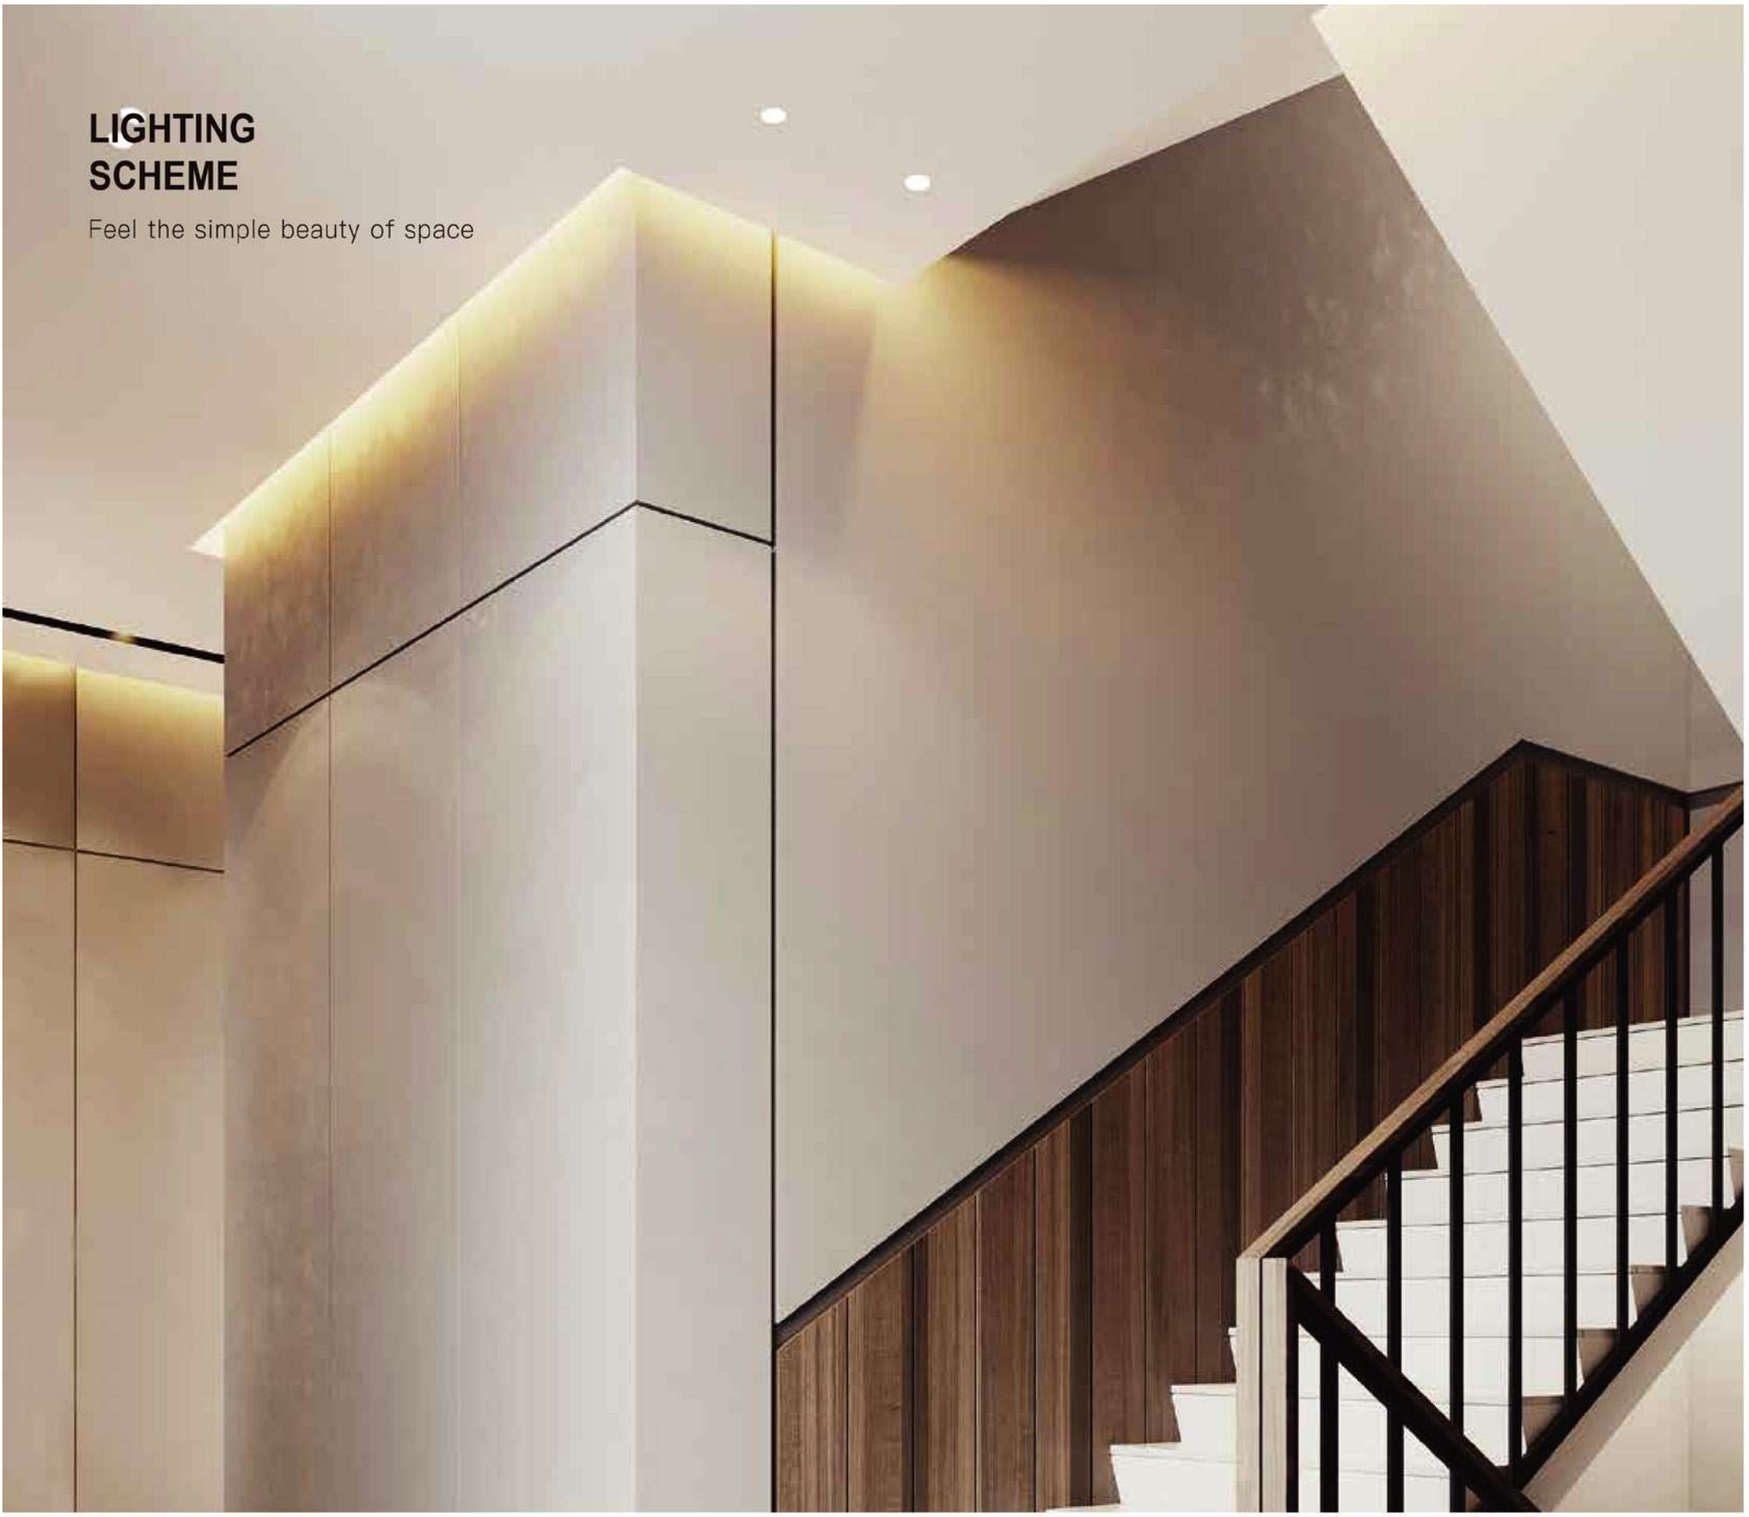

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space, Rigart Light provides the best solution for home space.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart tailored a reasonable, healthy and comfortable light environment for the office.



Each piece of art is the crystallization of tempering thoughts. Under the light, its artistic beauty penetrates the heart and soul, and instantly fills the space with inspiration. Rigart creates exclusive lighting aesthetics for the art space.

CHARACTERISTIC

COMFORTABLE SOFT DESIGN

MAGIC MIRROR



FORECAST SERIES

Recessed spotlight



Characteristic



[Forecast series] Recessed spotlight,derived from the design concept of less is more, simple geometric shape, pure white appearance, with bright chrome front ring, outlines modern and light luxury tones, in order to echo the modern high-quality life with simplicity and mood.



Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.


— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.







LARGE SIZE

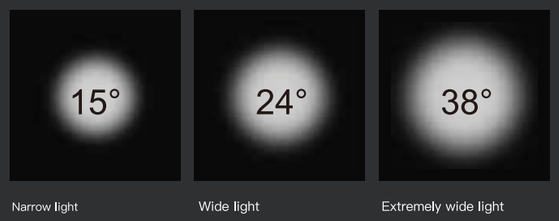

Narrow light | Wide light | Extremely wide light

SMALL SIZE & MEDIUM SIZE



Narrow light | Wide light | Extremely wide light

SMALL SIZE	LED / 7W
MEDIUM SIZE	LED / 10W
LARGE SIZE	LED / 20W

UNMATCHED LIGHT EFFECT PERFORMANCE



The lamp can be rotated 350 degrees horizontally and swung 90 degrees back and forth. The light is naturally soft and has a high degree of color reduction for the illuminated object.






LONG-LASTING LIGHTING QUALITY

Light moves with your heart



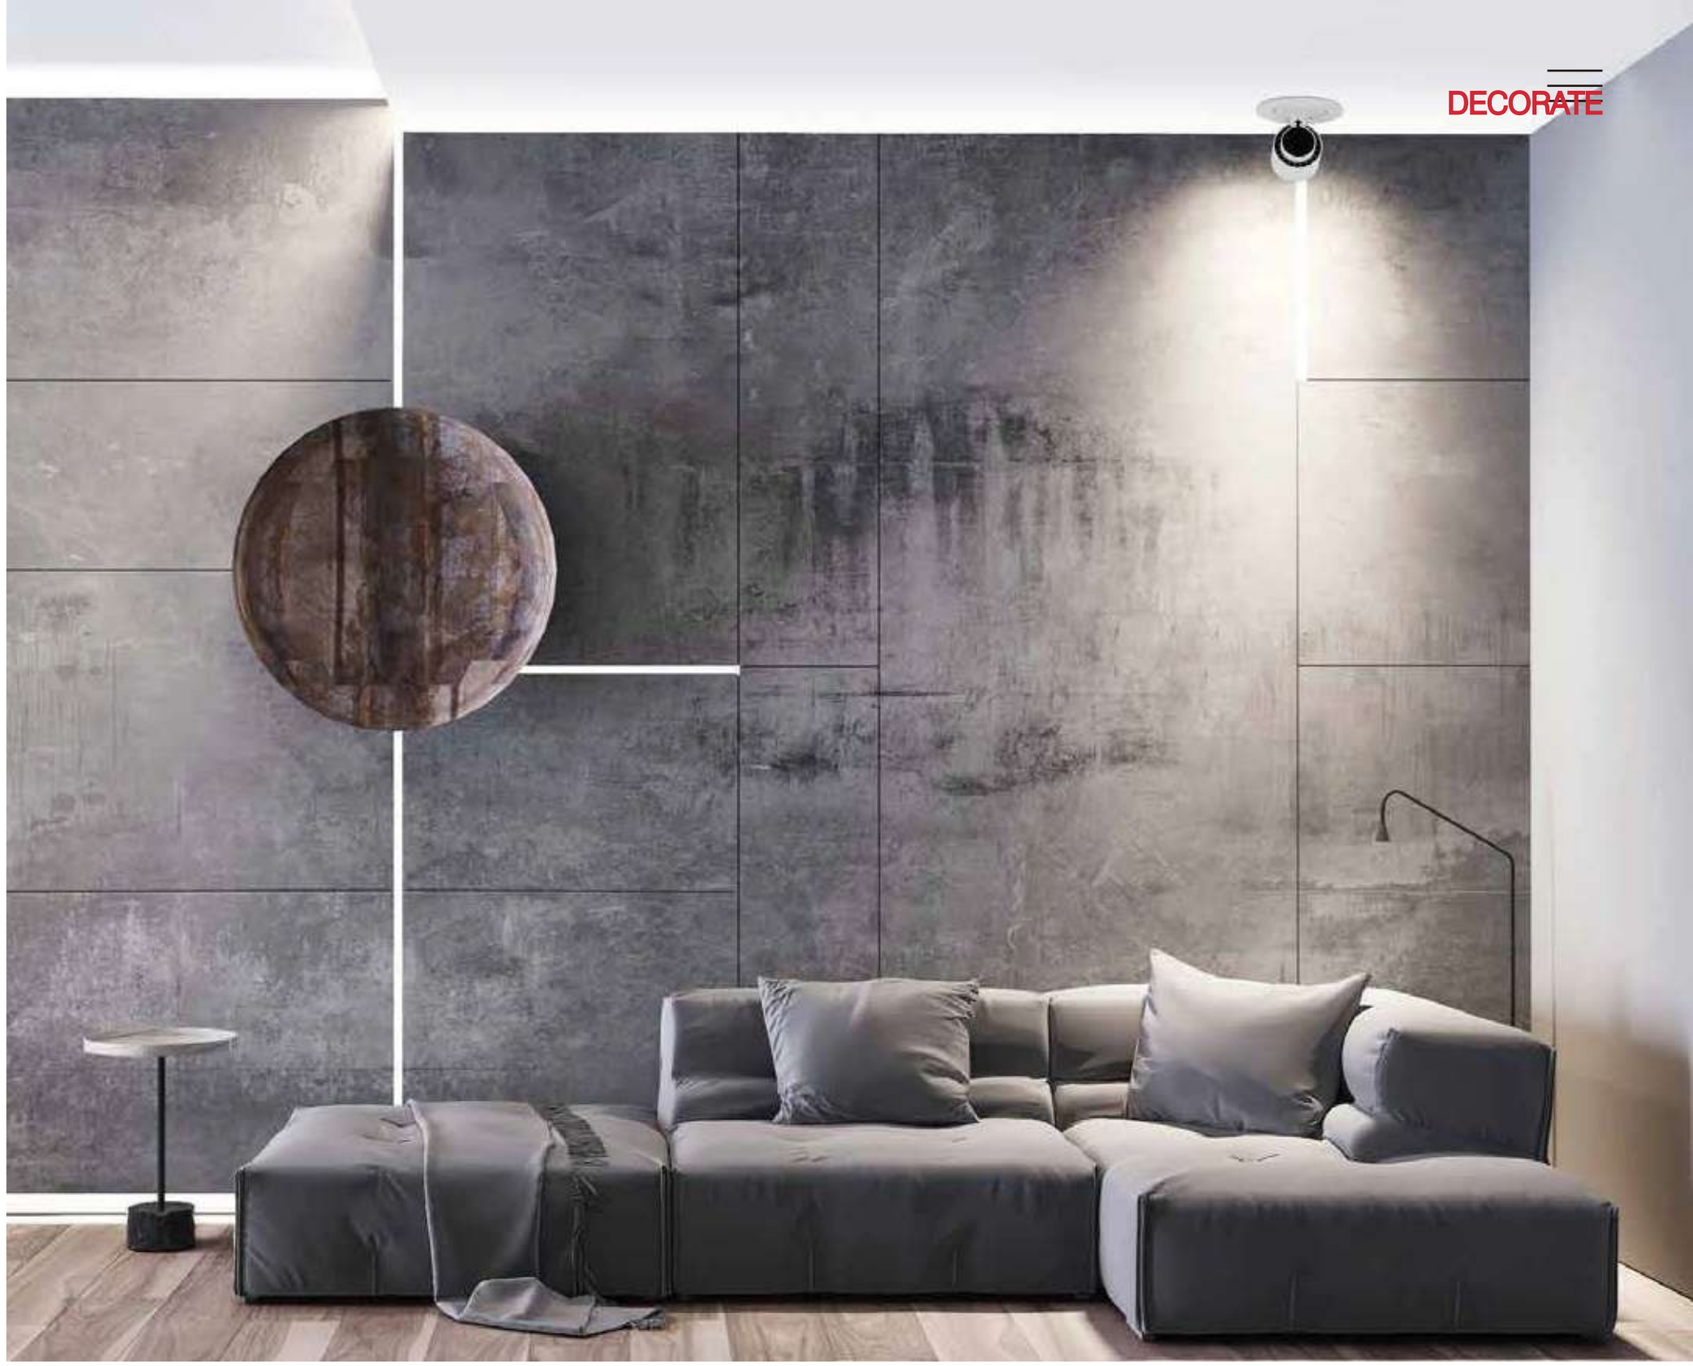

VISUAL COMFORT

More natural soft beam, more beautiful artistic atmosphere



Light effect is natural, comfortable, soft and even, let you indulge in the atmosphere full of artistic beauty

Commercial Lighting



2700K

Warm light is suitable for warm and quiet environments such as restaurants, hotels, cafes, and private clubs.



4000K

Neutral light is close to natural light, which is suitable for places such as living room and lobby that need warm white light.



5000K




Cold white light is like the bright sun at noon, which has high lumen and color rendering, and has a wide range of applications.

610lm
2590lm/**Model**

Provide a wide range of luminous power levels and beam angles, making it suitable for uniform lighting design of facades of different heights

610lm
/
2590 lm

—
Reference neutral white model

610lm		**7W**
1430lm		**10W**
2590lm		**20W**

The value of the flux and power of the beam is rated.



LIGHTING SCHEME

Feel the simple beauty of space

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space, Rigart Light provides the best solution for home space.



In addition to highlighting the characteristics of the brand, the lighting can also reflect the best visual effects of the display, expressing the characteristics of the product, allowing consumers to stop and have a good impression on the store. Rigart illuminates exclusive lighting aesthetics for brand stores.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart tailored a reasonable, healthy and comfortable light environment for the office.



PRODUCT DESCRIPTION

Perceived light gives
the world artistic charm

Perceive the artistic
charm of the world

Derived from the design concept of less is more, simple geometric shape, pure white appearance, with bright chrome front ring, outlines modern and light luxury tones, in order to echo the modern high-quality life with simplicity and mood.



The lamp can be rotated 350 degrees horizontally and swung 91 degrees back and forth. The light is naturally soft and has a high degree of color reduction for the illuminated object.

The well-designed lamp body structure is convenient for assembly production and installation. There are no exposed screws or fixing parts on the outer surface, which is more simple and beautiful.

The luminaire adopts a modular design, which can be used with different components to convert between surface-mounted and flush-mounted structures to meet different installation requirements.





SPACE

FORECAST



Derived from the design concept of less is more, simple geometric shape, pure white appearance, with bright chrome front ring, outlines modern and light luxury tones, in order to echo the modern high-quality life with simplicity and mood.



CHARACTERISTIC

FORECAST SERIES





MINIMALIST
FREEDOM
SMART

CHARACTERISTIC



SDL0030-01A-007



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Retractable spotlight	Recessed	Φ75*122 Lamp bodyΦ35	Matte white	IP20	7W	610Lm	15°/24°/36°	2700K 4000K 5000K	Ra≥90
Other Finish	Matte Black							Cut out(mm)	60

SDL0030-01B-010




Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Retractable spotlight	Recessed	Φ95*122 Lamp bodyΦ50	Matte white	IP20	10W	1430Lm	15°/24°/36°	2700K 4000K 5000K	Ra≥90
Other Finish	Matte Black							Cut out(mm)	75

SDL0031-01A-020



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Retractable spotlight	Recessed	Φ140*152 Lamp bodyΦ80	Matte white	IP20	20W	2590Lm	15°/24°/38°	2700K 4000K 5000K	Ra≥90
Other Finish	Matte Black							Cut out(mm)	110

Install

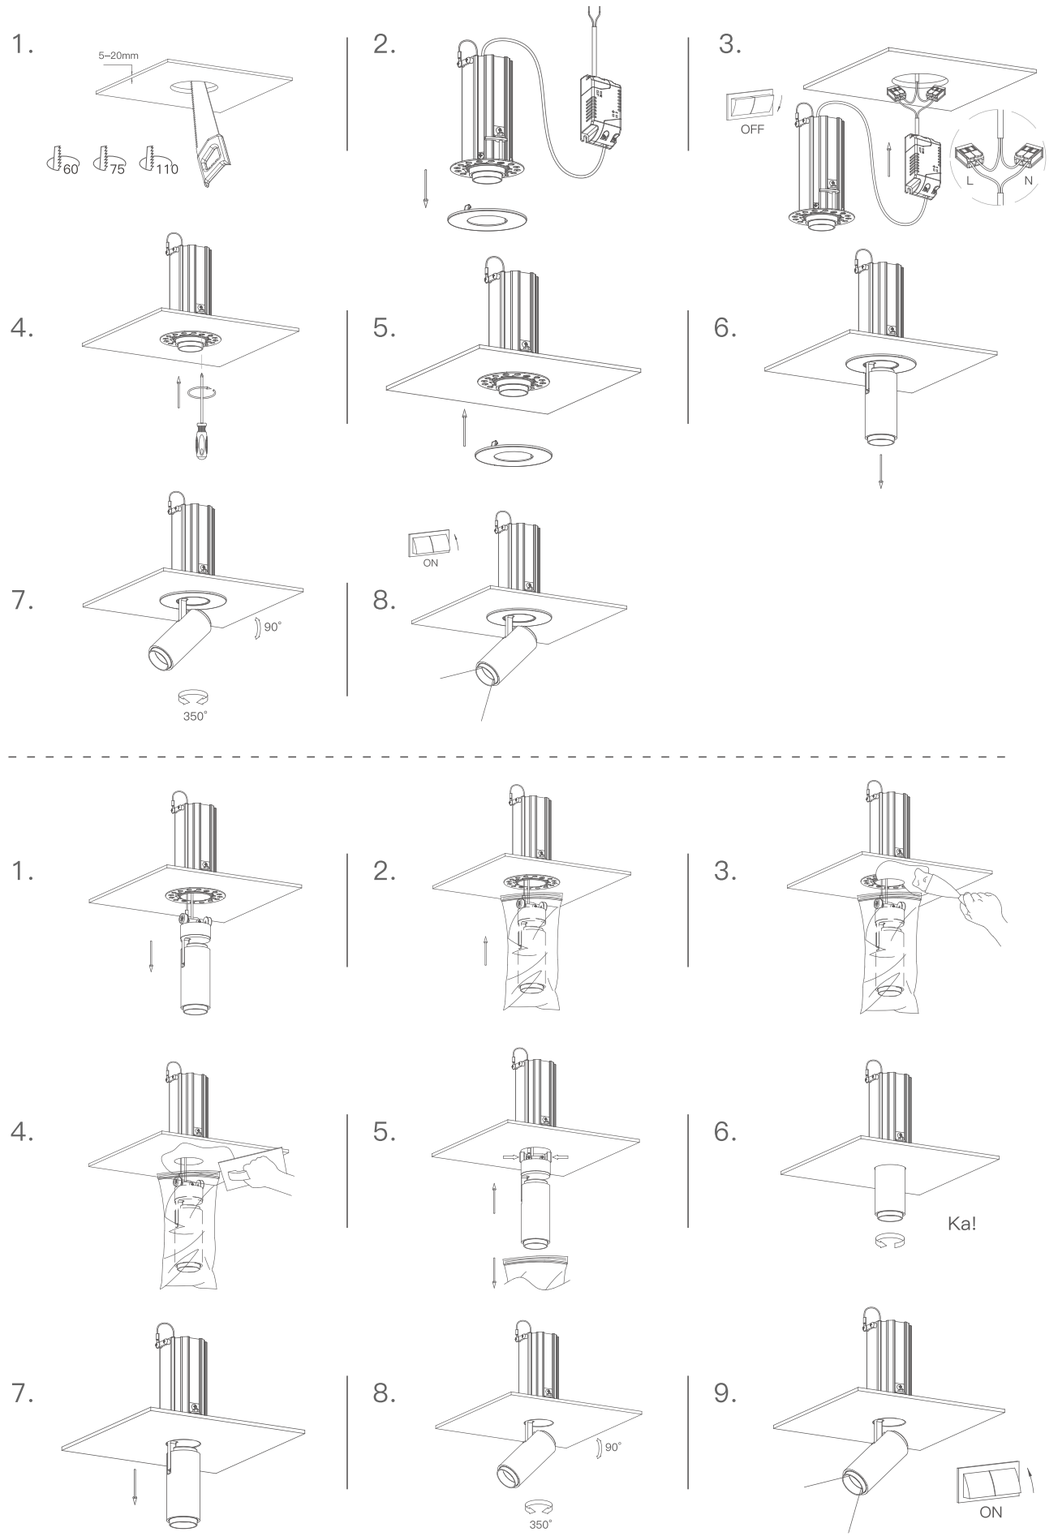

OUTDOOR





London Eye & Country Hall, London, England, United Kingdom
Photo credits: Ali Khademolhosseini






Model:	FL65-1.5SL	FL65-03SL
Power:	1,5W	3W
Beam angle:	15°/ 28°	
Dimensions:		








General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB, RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	FL7003-3SL	FL7006-3SL
Power:	3W	6W
Beam angle:	8°/ 12°/ 20°/ 30°/ 45°/ 15°x30°/ 10°x60°	

Dimensions:

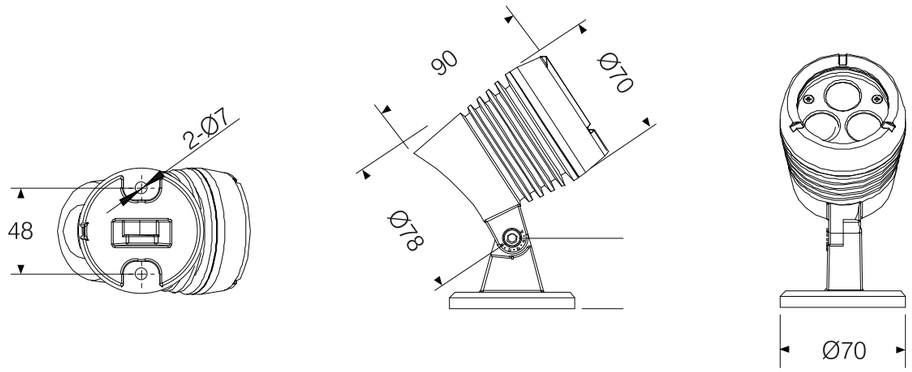


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb



Model:	FL9507-6SL	FL9512-6SL	FL9516-7SL
Power:	7W	12W	16W
Beam angle:	8°/ 12°/ 20°/ 30°/ 45°/ 15°x30°/ 10°x60°		

Dimensions:

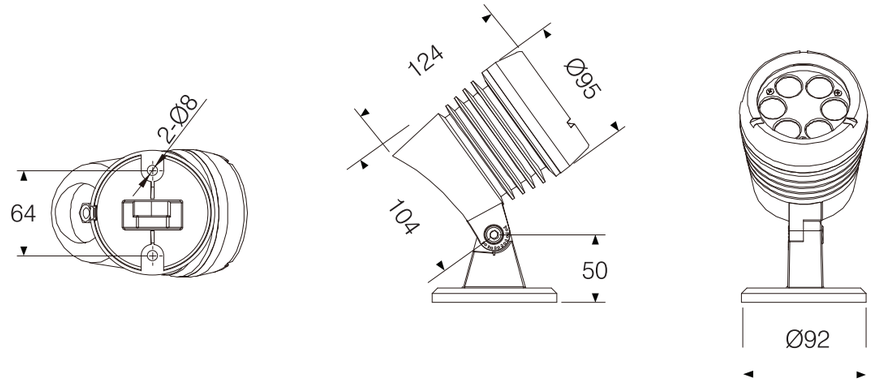

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb








Cylindrical Screen



Honeycomb Screen

Model:	FL9003-05RL	FL9012-05RL
Power:	3W	12W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x40°	
Dimensions:		

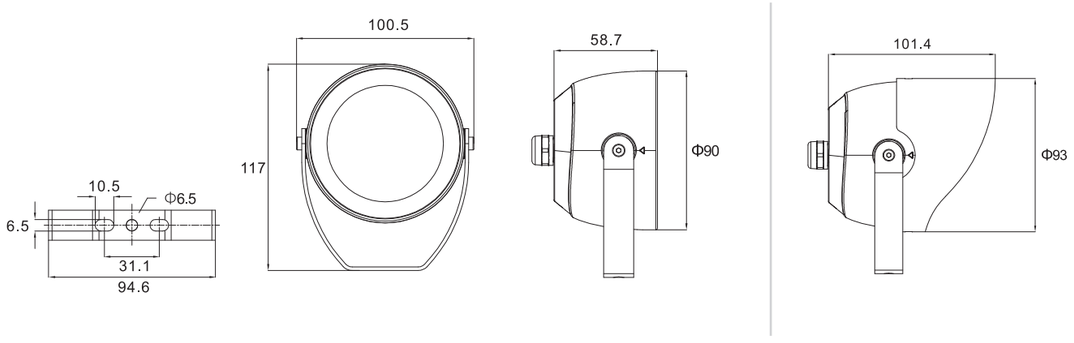

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-40°C～+50°C










Model:	FL9010R-01RL
Power:	10W
Beam angle:	15°/ 22°/ 36°
Dimensions:	

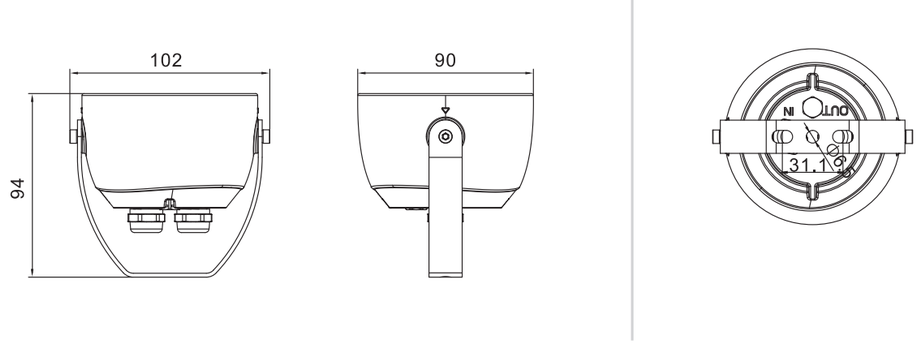

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC48V
Operating temperature:	-40°C～+45°C









Cylindrical Screen




Honeycomb Screen

Model:	FL14018-12RL	FL14024-18RL
Power:	12W	18W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x64°	
Dimensions:		







General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb









Model:	FL14020R-01RL
Power:	20W
Beam angle:	15°/ 22°/ 36°
Dimensions:	









General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ Bicolor
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC48V
Operating temperature:	-40°C～+45°C









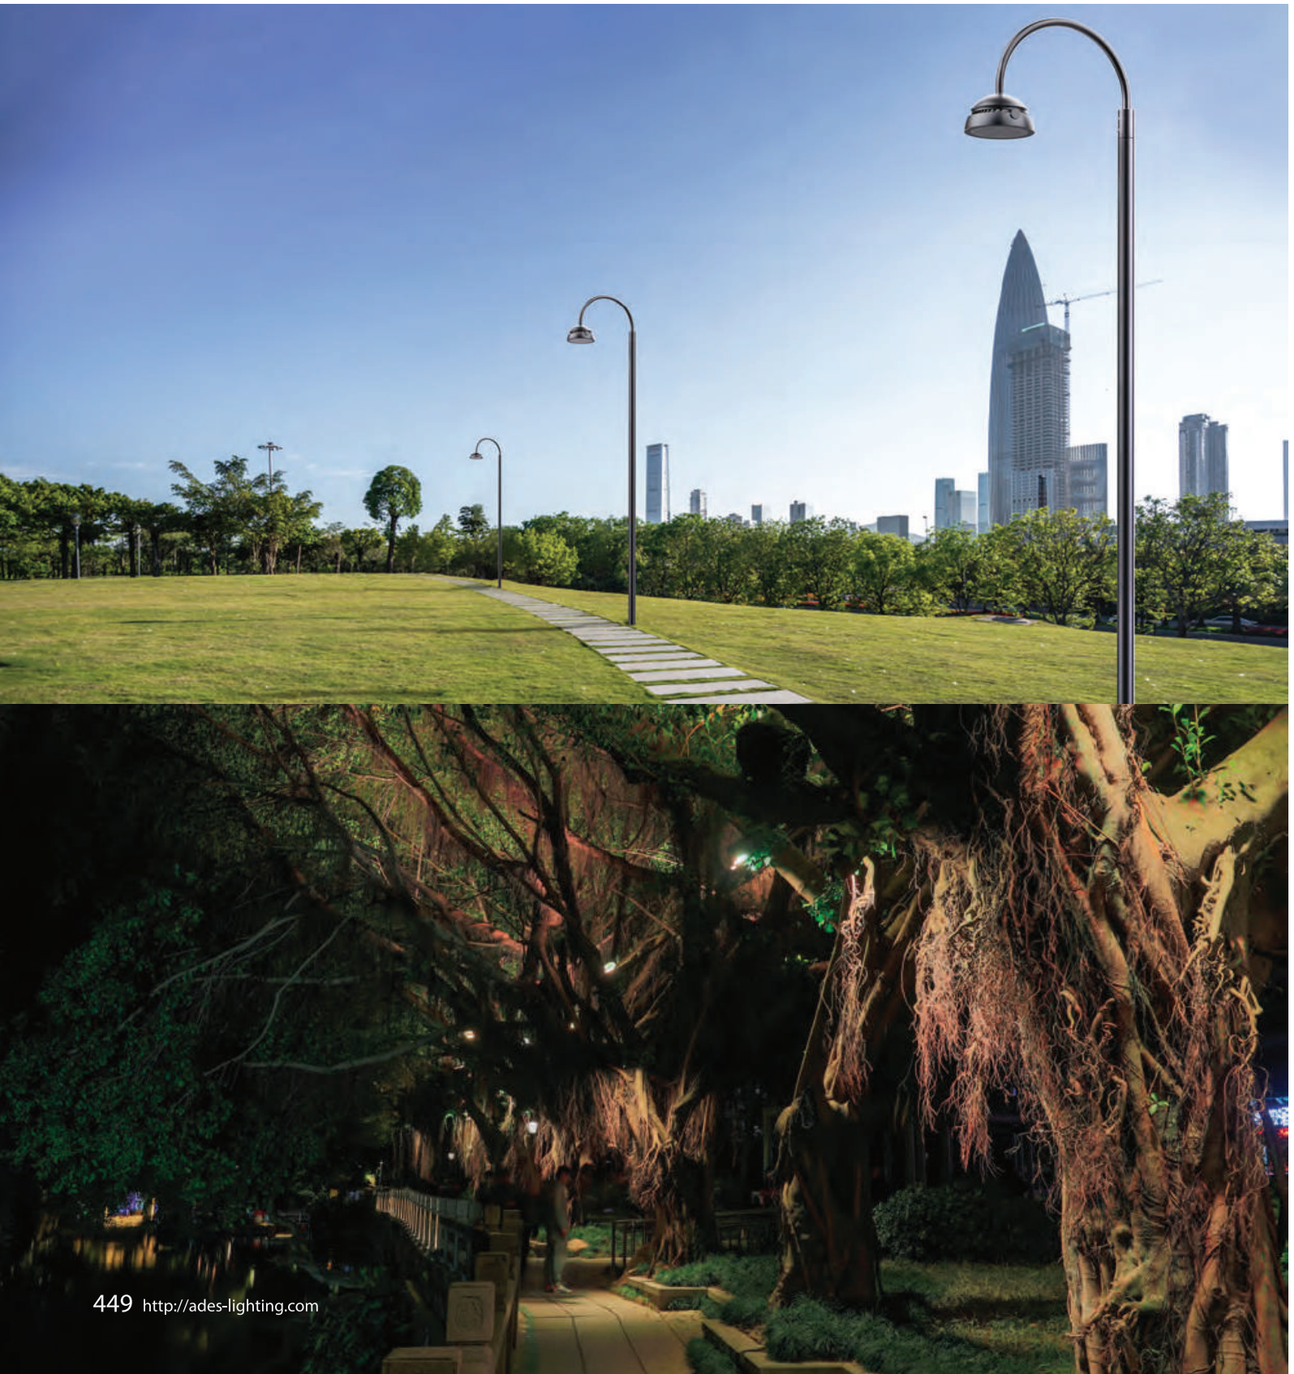








Cylindrical Screen



Honeycomb Screen


Model:	FL19024-09RL	FL19036-18RL	FL19048-18RL
Power:	24W	36W	48W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x64°		


Dimensions:

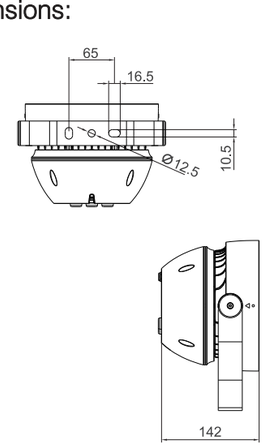









General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-40°C～+50°C
Ancessory	Honeycomb








Cylindrical Screen



Honeycomb Screen

Model:	FL22048-30RL	FL22060-30RL	FL22072-30RL
Power:	48W	60W	72W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x64°		

Dimensions:

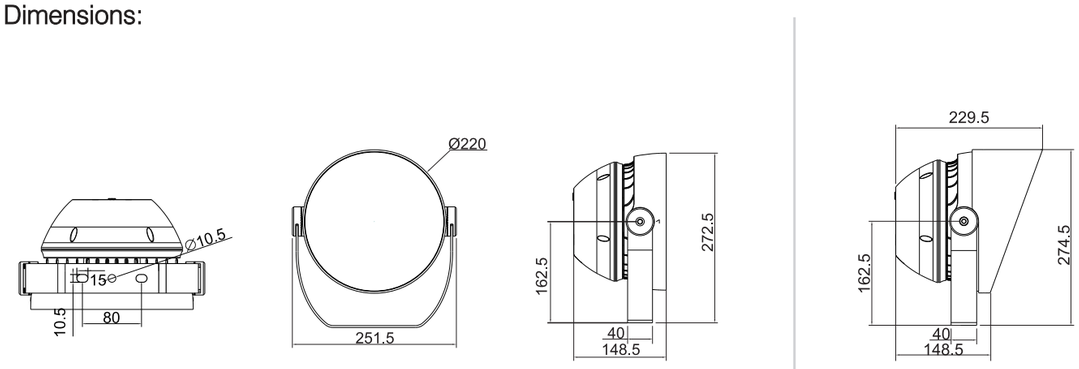

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC100-240V
Operating temperature:	-40°C～+50°C








Cylindrical Screen



Honeycomb Screen

Model:	FL26060-24RL	FL26064-24RL	FL260100-48RL	FL260120-48RL
Power:	60W	64W	100W	120W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x64°			

Dimensions:

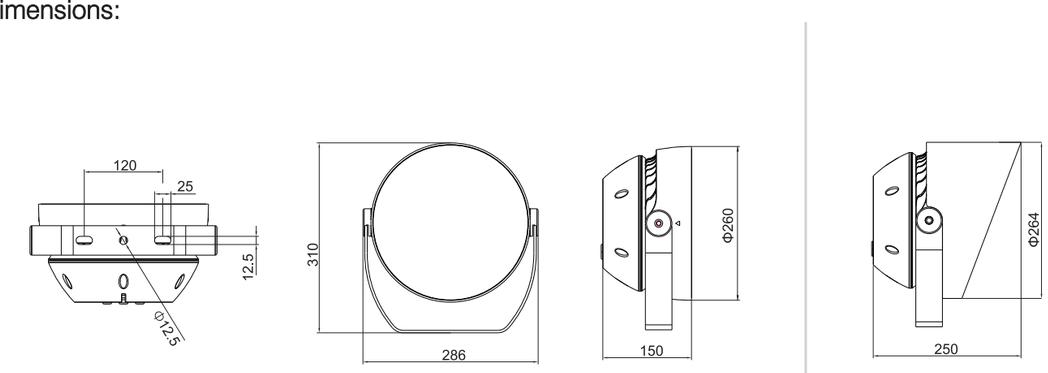

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC100-240V
Operating temperature:	-40°C～+50°C







FLOOD LIGHT








Cylindrical Screen



Honeycomb Screen

Model:	FL35090-36RL	FL350150-72RL	FL350180-72RL
Power:	90W	150W	180W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x40°		

Dimensions:

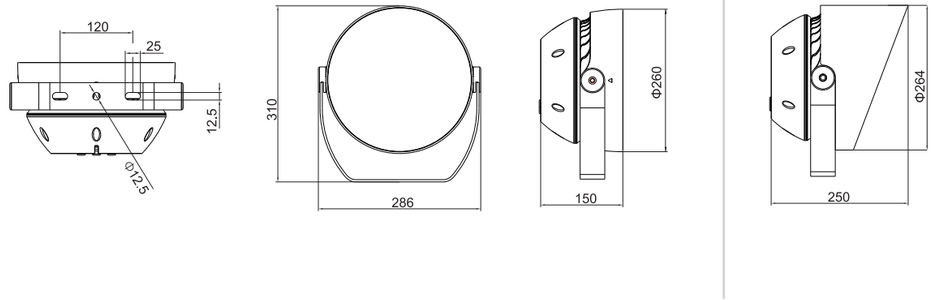


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC100-240V
Operating temperature:	-40°C～+50°C





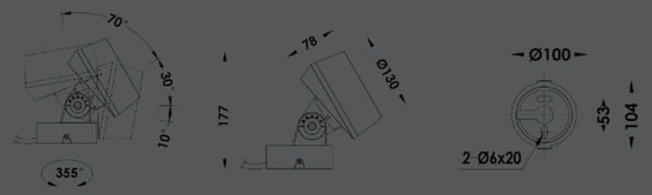







Model:	FL13012-03AL	FL13012-06AL	FL13015-01AL	FL13018-06AL
Power:	3x4W	6x2W	15W	6x3W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	20°/ 25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°

Dimensions:



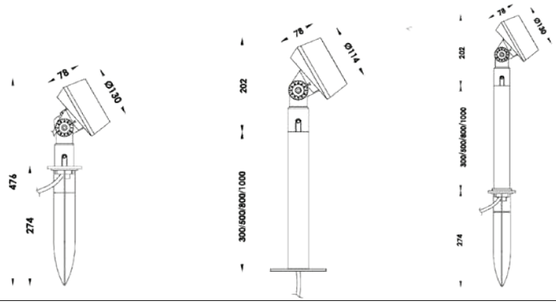


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C～+40°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield





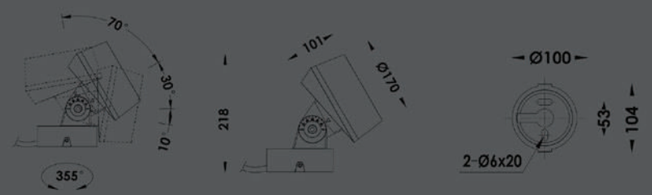






Model:	FL17024-06AL	FL17024-12AL	FL17024-01AL	FL17036-12AL
Power:	6x4W	12x2W	24W	12x3W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	20°/ 25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°

Dimensions:

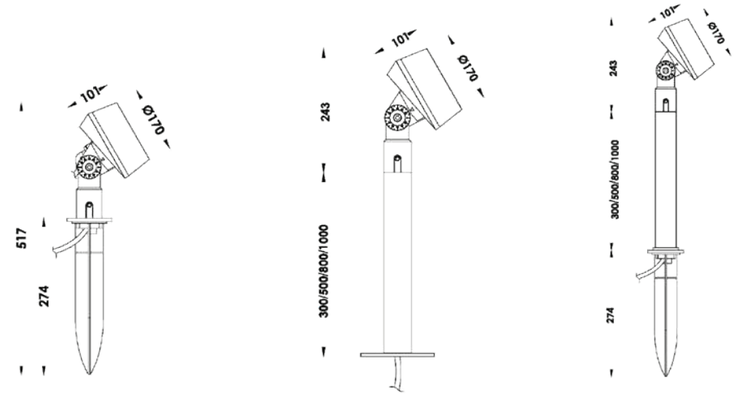



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C～+40°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield
































Model:	FL21048-12AL	FL21048-24AL	FL21040-04AL	FL21072-24AL
Power:	12x4W	24x2W	4x10W	24x3W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	20°/ 25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°

Dimensions:

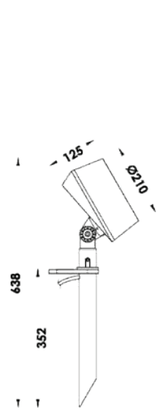

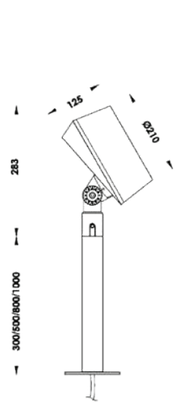

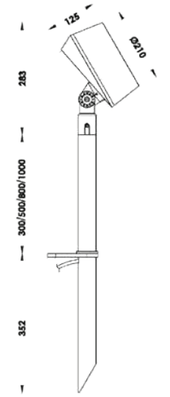

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C～+40°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield













Model:	FL26072-18AL	FL26061-36AL	FL26060-04AL	FL260108-36AL
Power:	18x4W	36x1,7W	4x15W	36x3W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	20°/ 25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°
Dimensions:				











General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC220V-240V/ DC12V/ DC24V
Operating temperature:	-20°C～+40°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield





















FLOOD LIGHT










Model:	FL15010-1SL	FL15020-4SL
Power:	10W	20W
Beam angle:	1,5°/ 2°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°	

Dimensions:

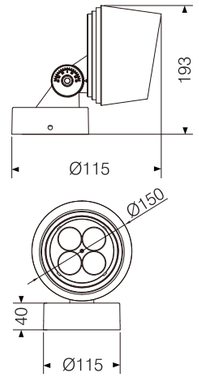







General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield














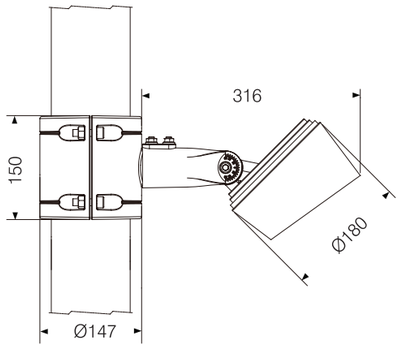














Model:	FL18022-6SL	FL18030-6SL	FL18036-6SL
Power:	22W	30W	36W
Beam angle:	2,6°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°		


Dimensions:

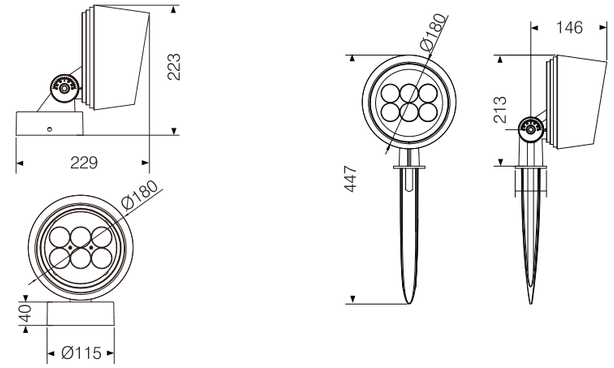


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Round-meshed Grill, Honeycomb Anti-glare Shield




























Model:	FL210-30SL	FL210-45SL	FL210-60SL	FL210-100SL
Power:	30W	45W	60W	100W
Beam angle:	1,5°	2°	2,6°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°	


Dimensions:

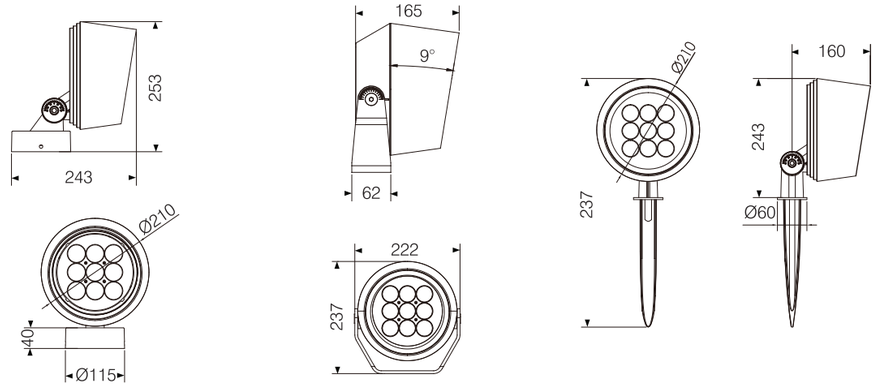


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield














504









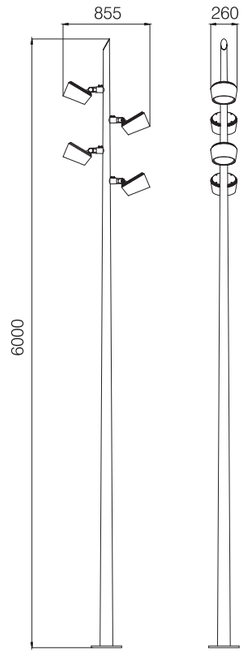







Model:	FL30340-16SL	FL30360-16SL	FL30375-16SL	FL303100-16SL
Power:	40W	60W	75W	100W
Beam angle:	1,5°	2,6°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°		

Dimensions:

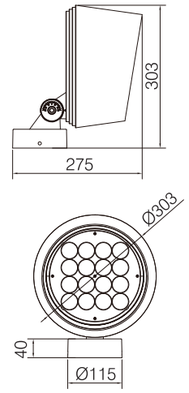

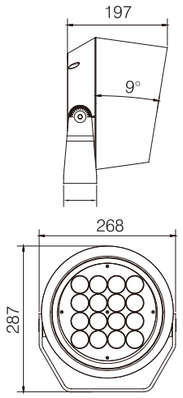



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield





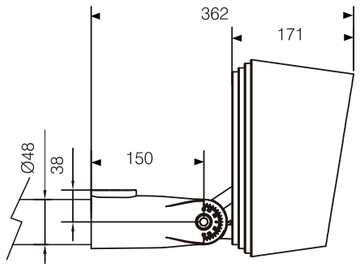

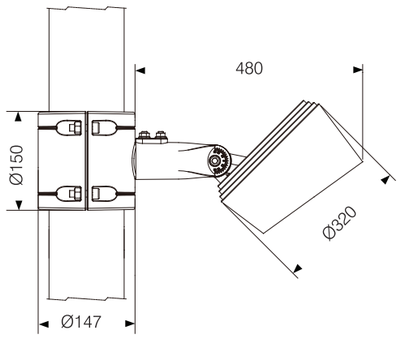









Model:	FL328120-25SL	FL328150-25SL	FL328160-25SL	FL328180-25SL
Power:	120W	150W	160W	180W
Beam angle:	2,6°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°/ 15x60°			

Dimensions:









General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield








Model:	FL360-120SL	FL360-200SL	FL360-240SL
Power:	120W	200W	240W
Beam angle:	1,5°/ 2°/ 4,5°/ 8°/ 12°/ 20°/ 30°/ 40°/ 60°		

Dimensions:

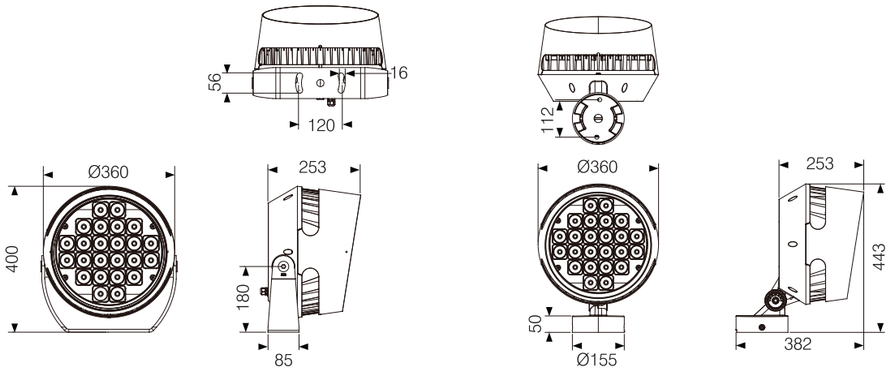

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield





Model:	FL435-190SL	FL435-300SL	FL435-360SL
Power:	190W	300W	360W
Beam angle:	1,5°/ 2°/ 4,5°/ 8°/ 12°/ 20°/ 30°/ 40°/ 60°		

Dimensions:

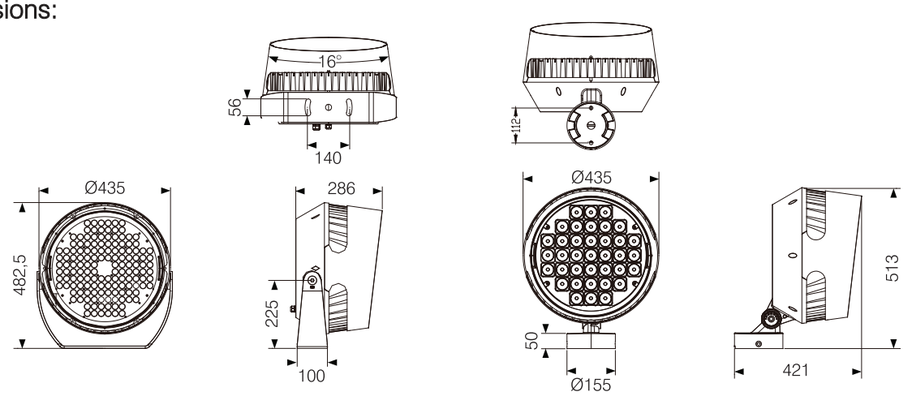


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield



Model:	FL8506-3LD
Power:	6W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°

Dimensions:

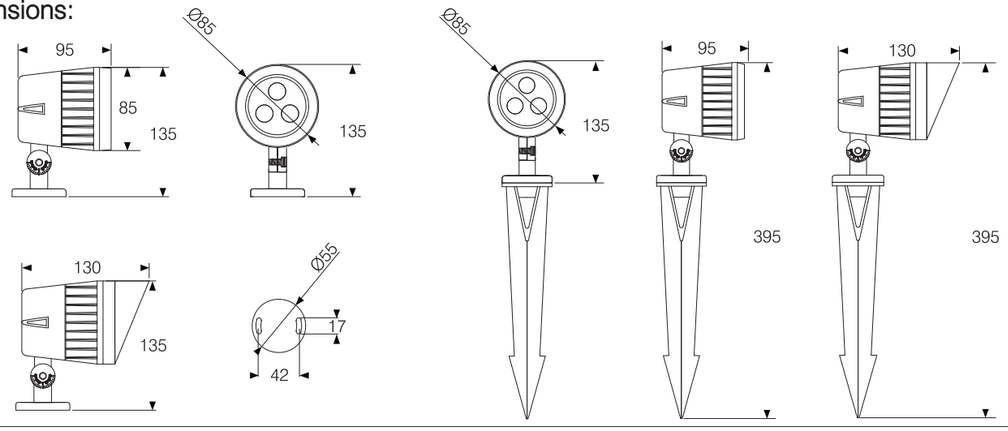


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	FL12520-9LD
Power:	20W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°

Dimensions:

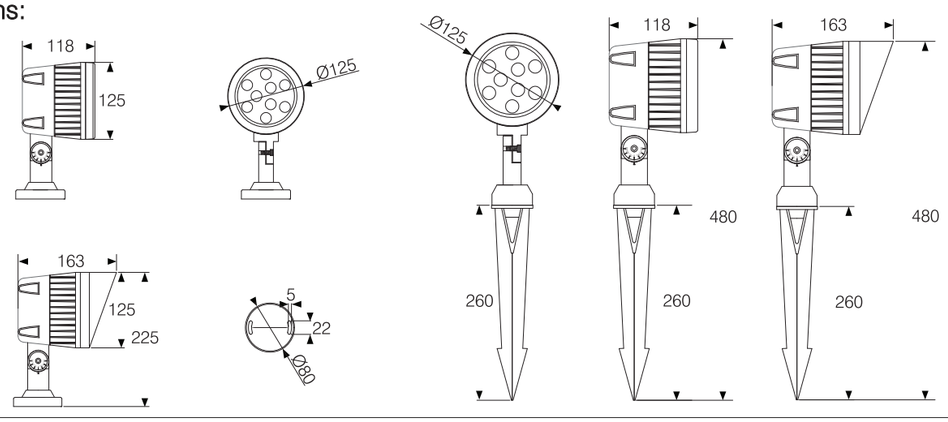


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	FL16030-18LD
Power:	30W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°

Dimensions:

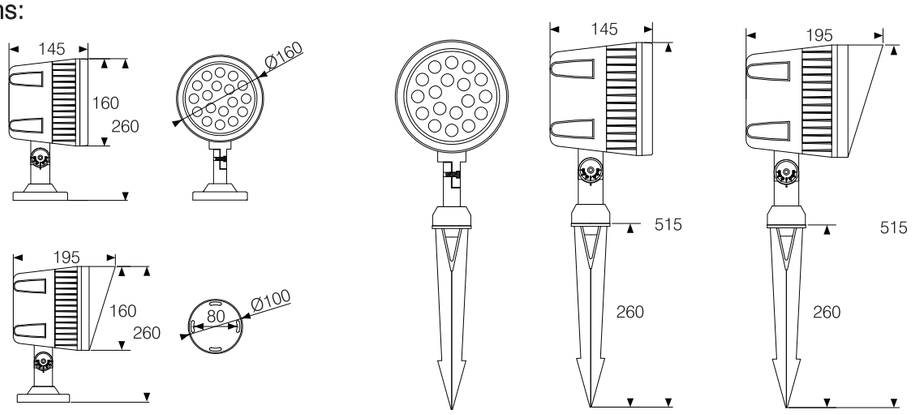


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	FL18060-36LD
Power:	60W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°

Dimensions:

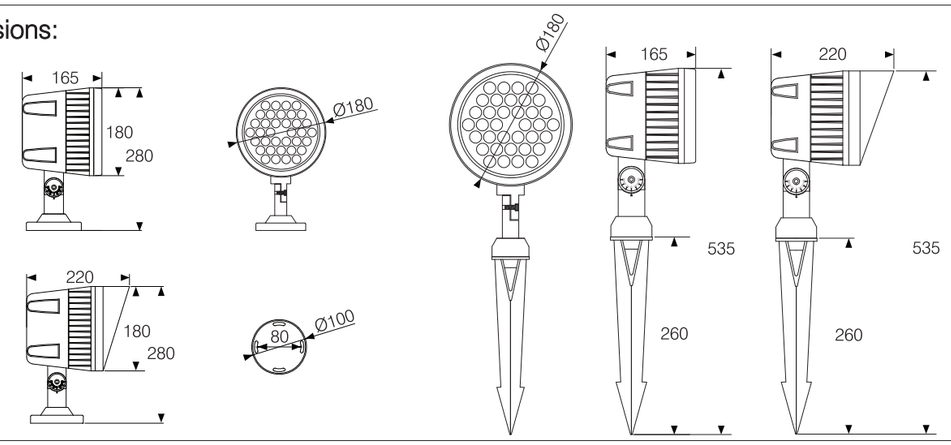


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb





Model:	FL8506-3ULD
Power:	6W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

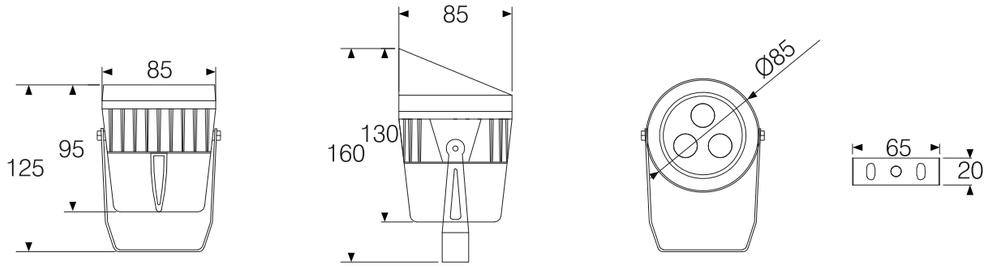


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb





Model:	FL12520-9ULD
Power:	20W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

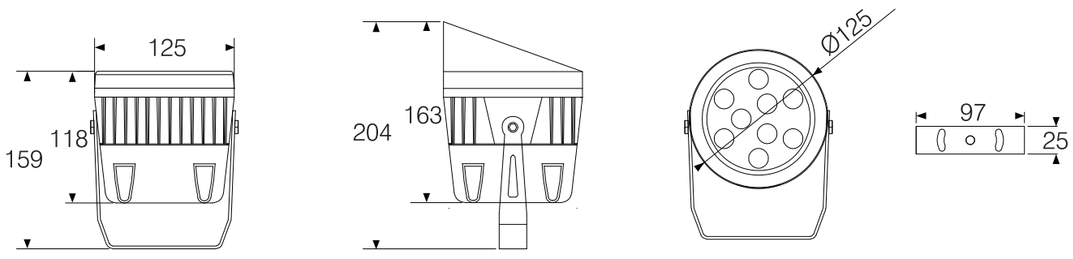


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb





Model:	FL16030-18ULD
Power:	30W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

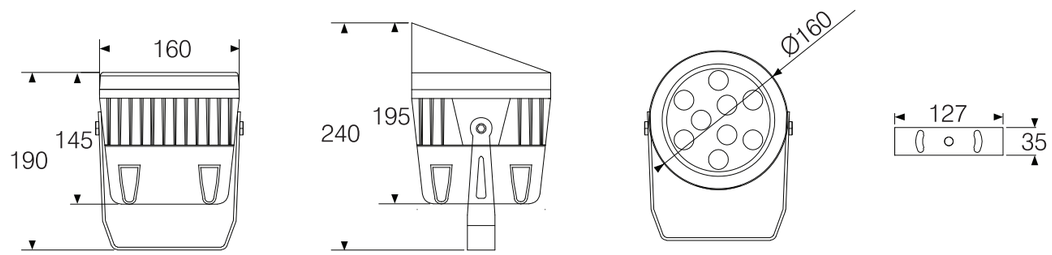


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb





Model:	FL18060-36ULD
Power:	60W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

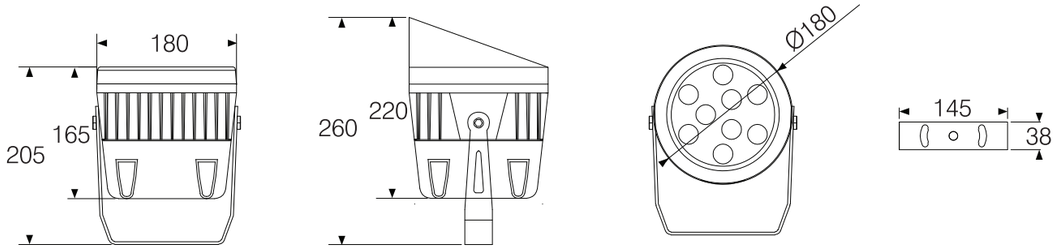

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb





Model:	FL265-48LD
Power:	80W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°

Dimensions:

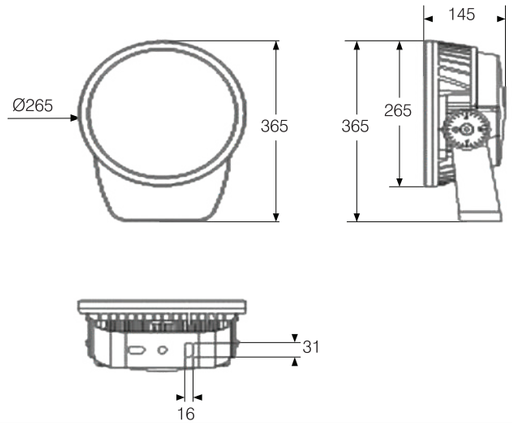


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Round-meshed Grill, Honeycomb, Anti-glare Shield

FLOOD LIGHT




Model:	FL200-80SL	FL200-90SL	FL200-150SL
Power:	80W	90W	150W
Beam angle:	1,5°/ 2,5°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°		
Dimensions:			

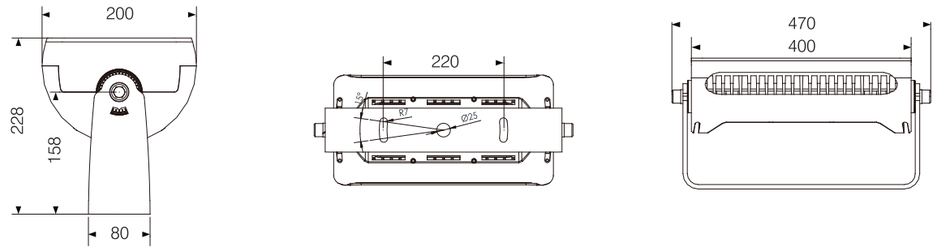

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW/ RGBWCLA
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-256V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb, Anti-glare Shield




Model:	FL145-40SL	FL145-56SL	FL145-72SL
Power:	40W	56W	72W
Beam angle:	2,5°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°/ 15x60°		
Dimensions:			

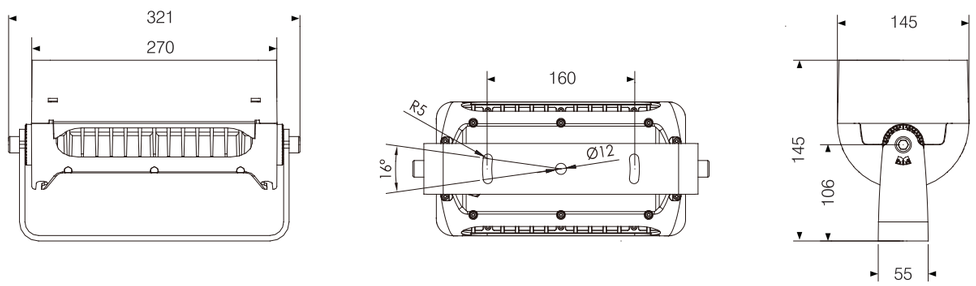

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW/ RGBWCLA
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb, Anti-glare Shield



Model:	FL240-180SL	FL240-210SL	FL240-300SL
Power:	180W	210W	300W
Beam angle:	1,5°/ 2,5°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°		
Dimensions:			

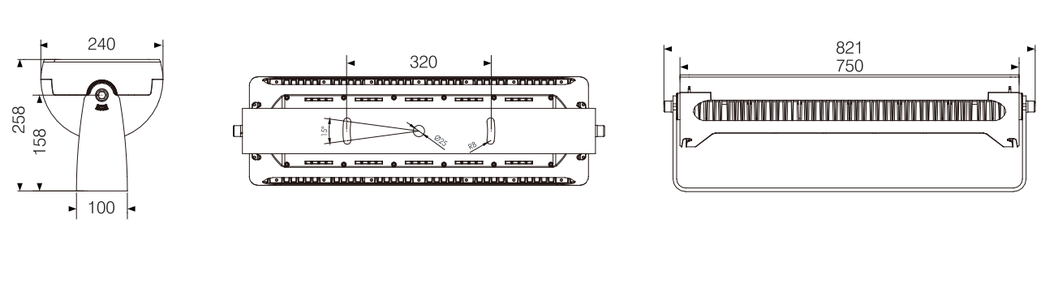


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW/ RGBWCLA
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb, Anti-glare Shield



Model:	FL952-400SL	FL952-800SL
Power:	400W	800W
Beam angle:	1,5°/ 2°/ 4,5°/ 8°/ 12°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°	

Dimensions:

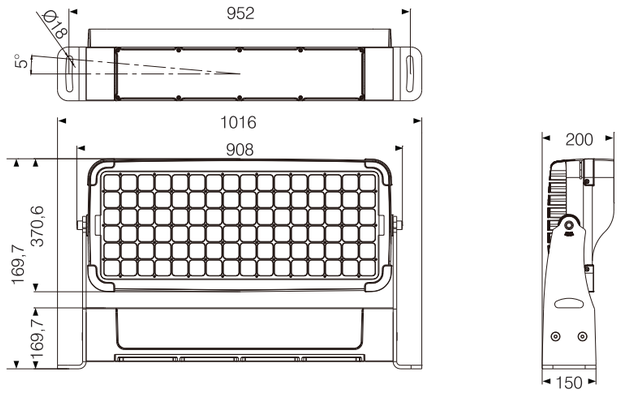


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW/ RGBWCLA
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb, Anti-glare Shield



Model:	FL900-360SL	FL900-420SL	FL900-600SL	FL900-720SL
Power:	360W	420W	600W	720W
Beam angle:	1,5°/ 2,5°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°			

Dimensions:

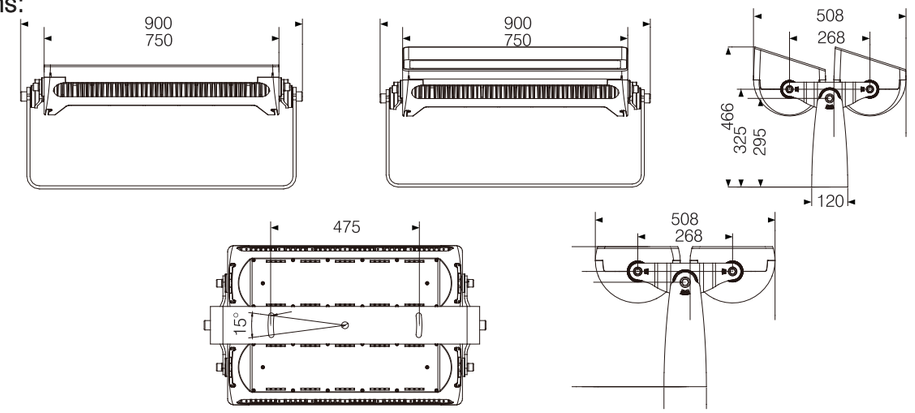

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW/ RGBWCLA
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb, Anti-glare Shield










Model:	FL18915-06LT	FL18920-06LT	FL33930-12LT	FL48945-18LT
Power:	15W	20W	30W	45W
Beam angle:	4°/ 8°/ 25°/ 36°/ 45°/ 10x30°			

Dimensions:

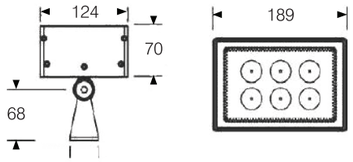

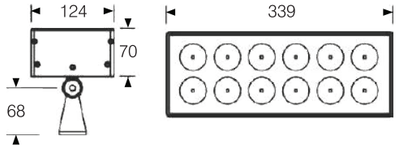

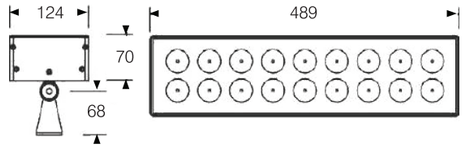

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb








Model:	FL63964-24LT	FL78975-30LT	FL93890-36LT
Power:	64W	75W	90W
Beam angle:	4°/ 8°/ 25°/ 36°/ 10x30°		

Dimensions:

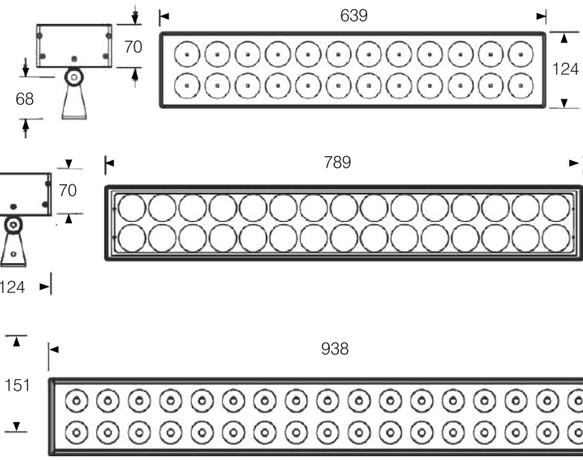


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb







Model:	FL21236-12LT	FL21248-12LT	FL29472-18LT	FL37696-24LT
Power:	36W	48W	72W	96W
Beam angle:	4°/ 8°/ 25°/ 36°/ 60°			

Dimensions:

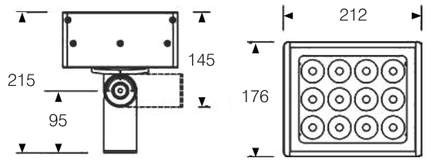

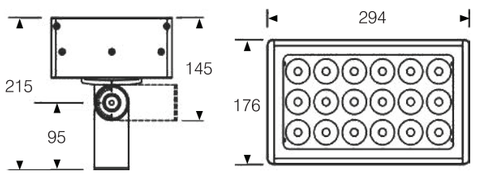

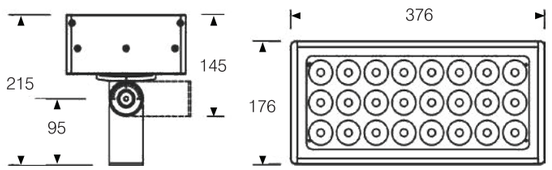



General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb




Model:	FL540144-36LT	FL663180-45LT
Power:	144W	180W
Beam angle:	4°/ 8°/ 25°/ 36°/ 60°	


Dimensions:

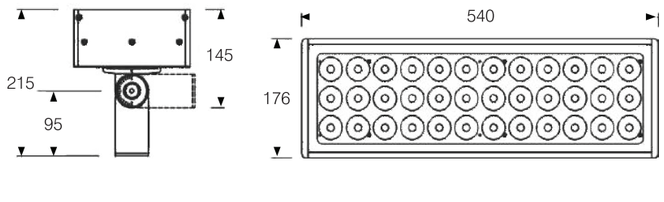

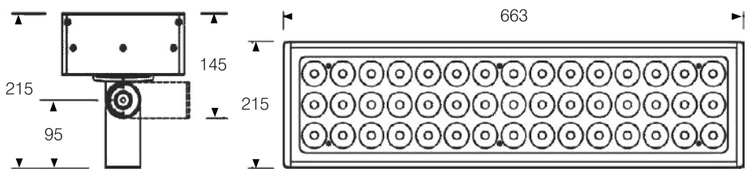


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb




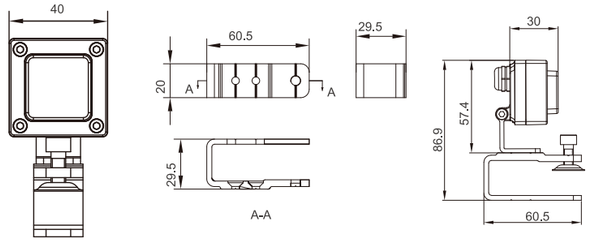



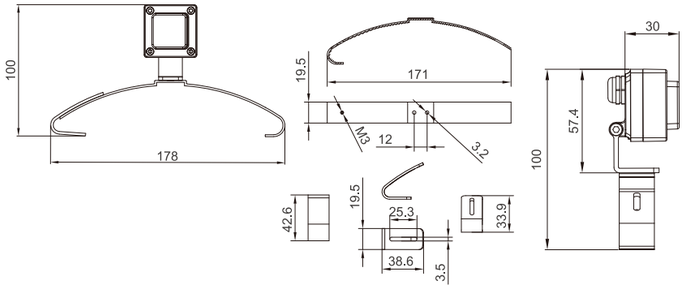




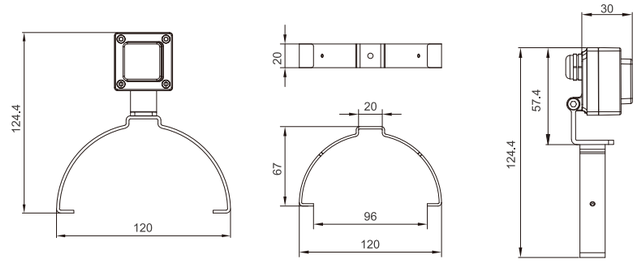








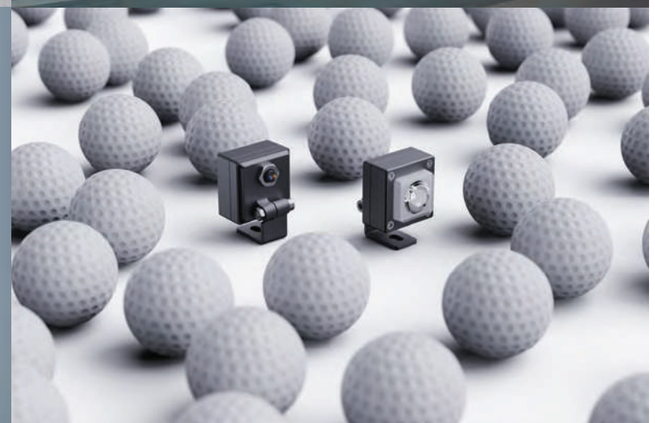



Model:	FL4030-01RL	FL4030-03RL
Power:	1W	3W
Beam angle:	7°/ 15°/ 25°/ 15°x45°	

Dimensions:

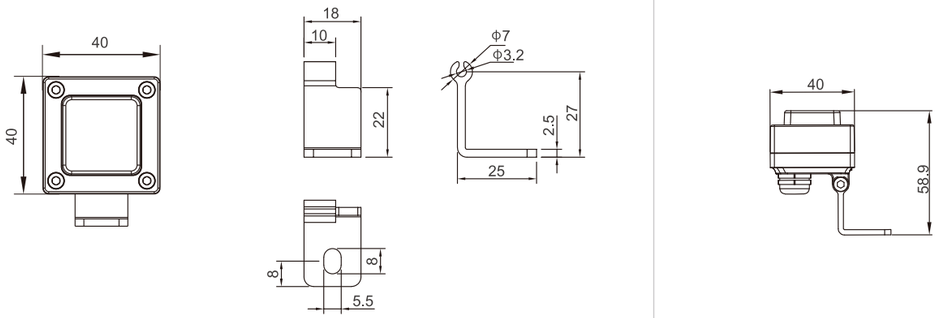



General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-30°C～+45°C
Ancessory	Anti-glare Baffle





































Model:	FL4054-01RL	FL4054-03RL
Power:	1W	3W
Beam angle:	7°/ 15°/ 25°/ 15x45°	

Dimensions:

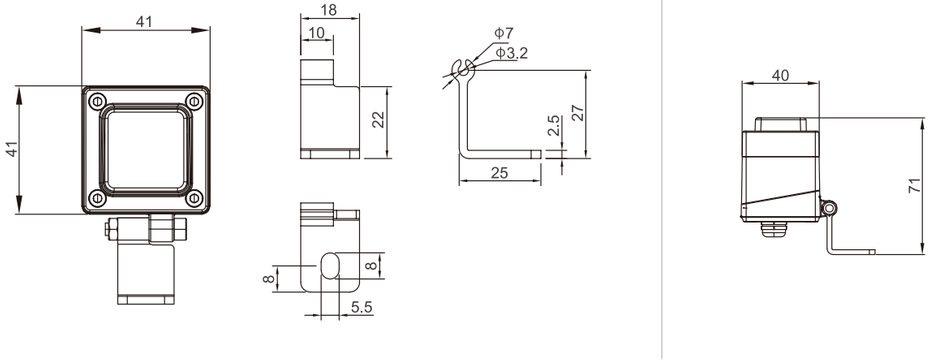


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-30°C～+45°C
Ancessory	Anti-Glare Baffle







Model:	FL5966-03RL	FL5966-06RL	FL5966-06RL	FL5966-08RL
Power:	3W	6W	6W	8W
Beam angle:	4°	15°/ 30°	7°/ 20°/ 30°	8°/ 15°/ 30°/ 15x45°
Dimensions:				

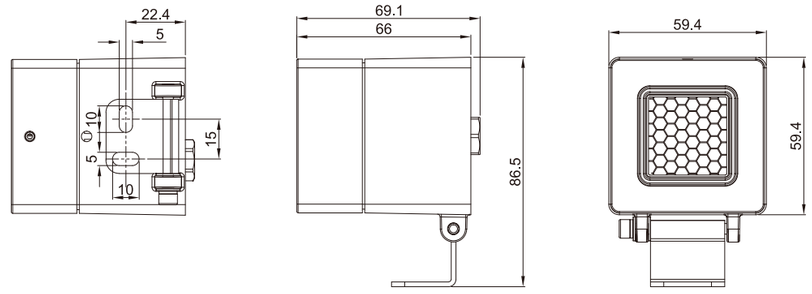



General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-30°C～+45°C
Ancessory	Anti-glare Baffle































Model:	FL10003-12LD	FL10006-12LD	FL10012-12LD
Power:	12W	12W	12W
Beam angle:	10°/ 15°/ 30°	7°	15°/ 20°/ 30°/ 40°
Dimensions:			






General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-30°C～+45°C
Ancessory	Anti-glare Baffle




Model:	FL7008-4LD
Power:	8W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

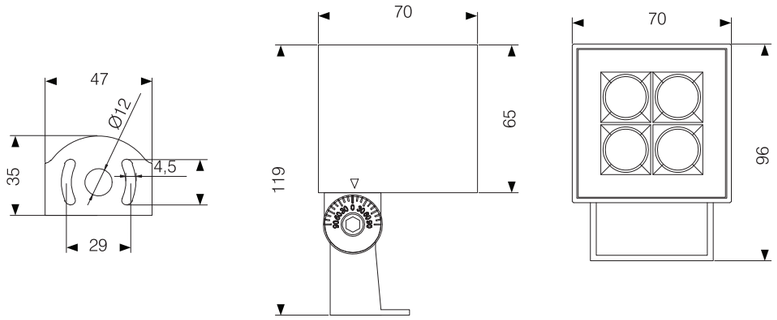

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	FL11018-9LD
Power:	18W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15x45°/ 10x60°
Dimensions:	

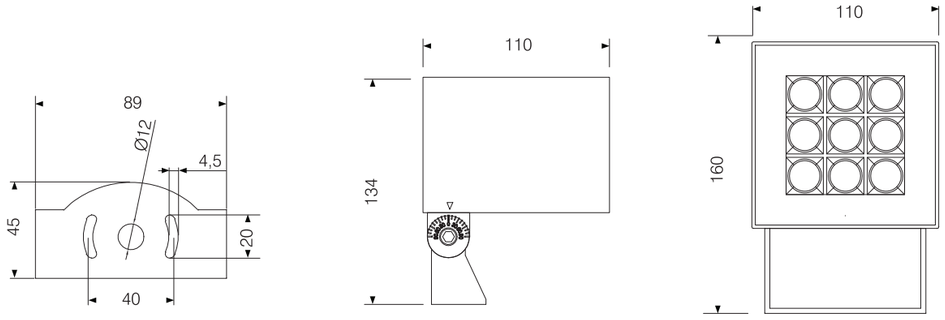


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	FL13530-16LD
Power:	30W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°

Dimensions:

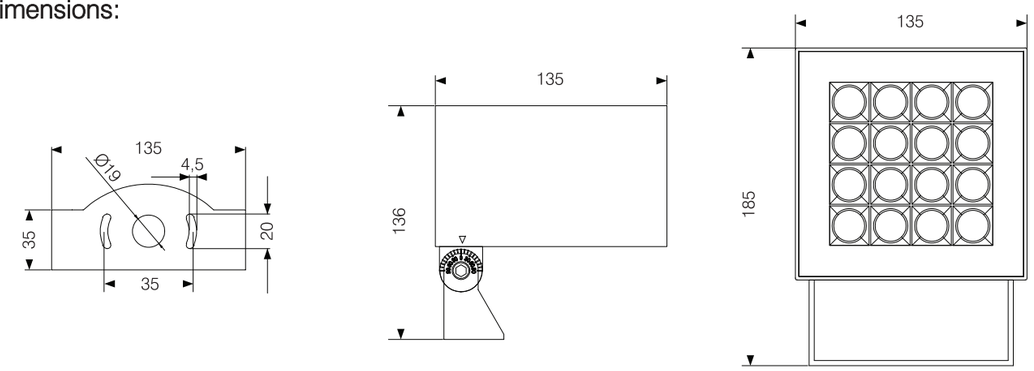


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	FL16050-25LD
Power:	50W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15x45°/ 10x60°


Dimensions:

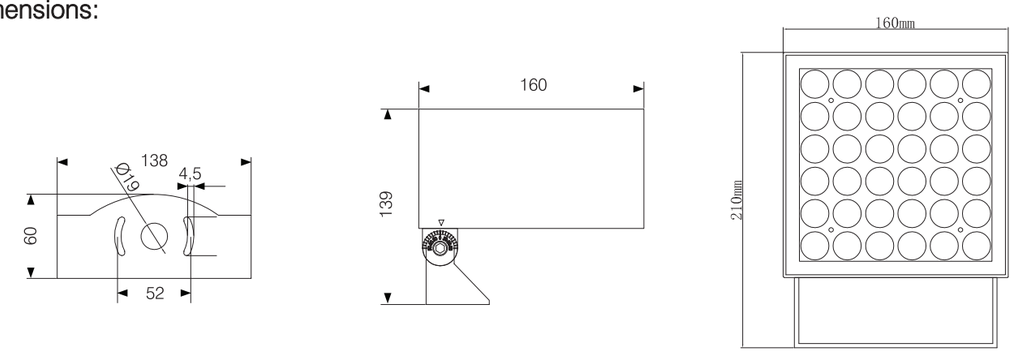

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb




Model:	FL540-288LT	FL540-330LT
Power:	288W	330W
Beam angle:	4°/ 8°/ 15°/ 25°/ 36°/ 45°/ 60°	
Dimensions:		

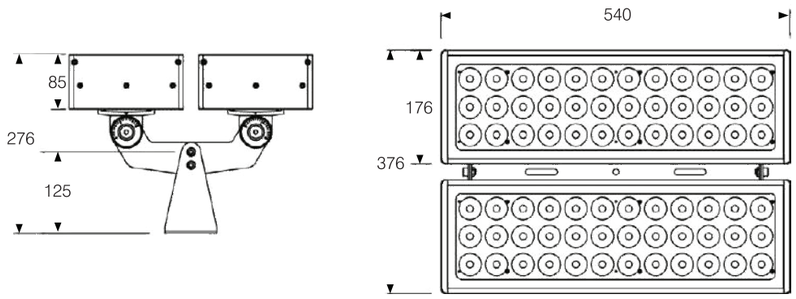

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	FL663-540LT	FL663-600LT
Power:	540W	600W
Beam angle:	4°/ 8°/ 15°/ 25°/ 36°/ 45°	
Dimensions:		

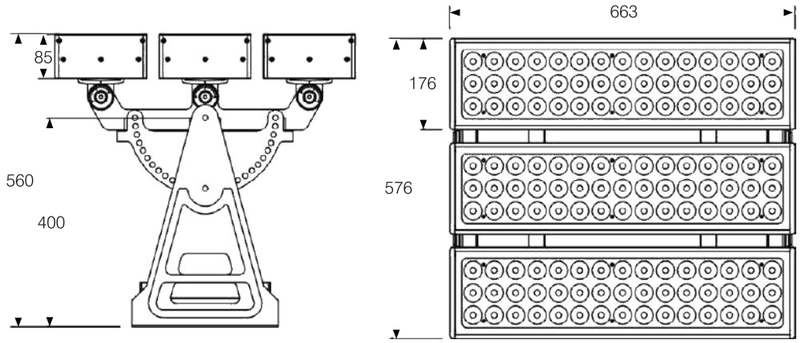


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb








Model:	FL20024-24LD
Power:	24W
Beam angle:	5°/ 15°/ 25°/ 40°/ 60°/ 15x45°/ 15x60°
Dimensions:	

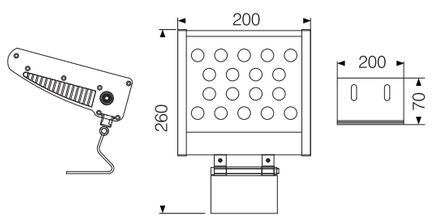

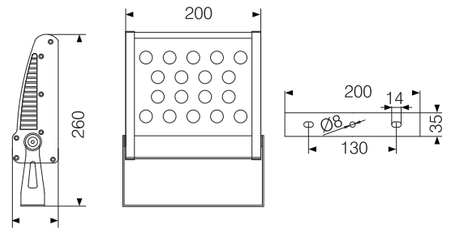


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb





Model:	FL27036-36LD
Power:	36W
Beam angle:	5°/ 15°/ 25°/ 40°/ 60°/ 15x45°/ 15x60°
Dimensions:	

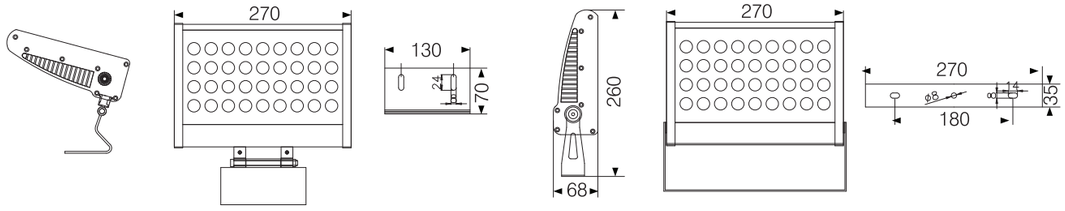


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb





Model:	FL31054-54LD
Power:	54W
Beam angle:	5°/ 15°/ 25°/ 40°/ 60°/ 15x45°/ 15x60°
Dimensions:	

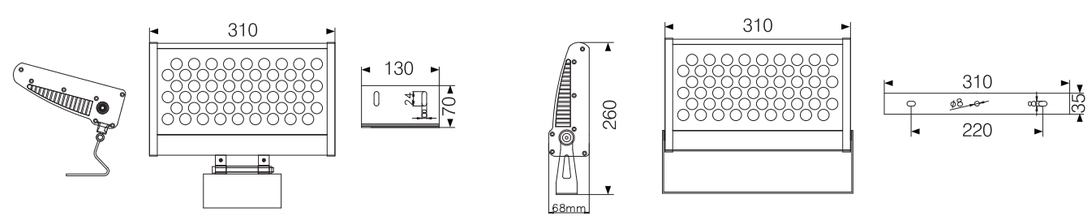

General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb











Model:	UW38-1.5LT	UW55-02SL
Power:	1,5W	2W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°	

Dimensions:











General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C






Model:	UW69-02SLT	UW69-02ALT
Power:	2W	2W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°	

Dimensions:



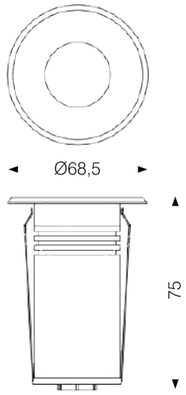

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C




Model:	UW45-01PL
Power:	1,5W
Beam angle:	15°/ 25°/ 38°/ 45°
Dimensions:	

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Solid Passivated (Anodizing). Aluminum CNC machined as standard Stainless steel 316
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C




Model:	UW180-10SL	UW180-16SL	UW145-07SL	UW145-12SL
Power:	10W	16W	7W	12W
Beam angle:	8°/ 12°/ 20°/ 30°/ 45°			
Dimensions:				

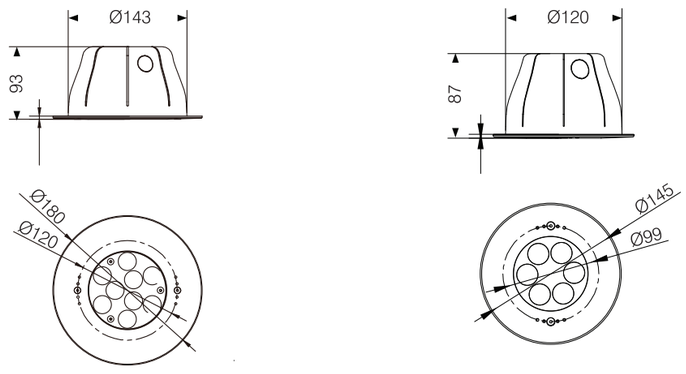


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW98-02LT
Power:	2W
Beam angle:	15°/ 30°/ 45°/ 60°/ 35°x45°
Dimensions:	



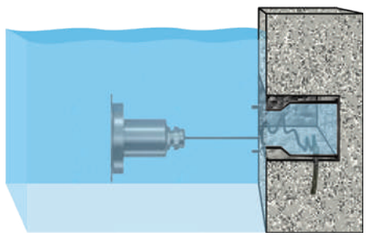



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW118-06LT
Power:	6W
Beam angle:	10°/ 25°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	



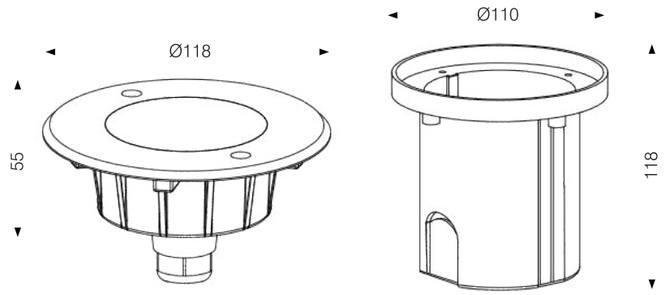


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW135-08LT
Power:	8,6W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

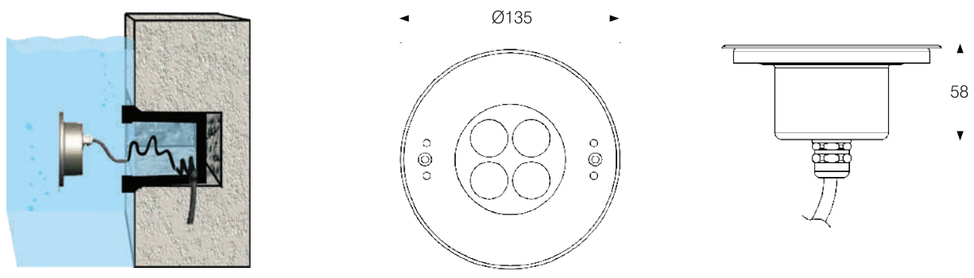


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW180-12LT
Power:	12W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

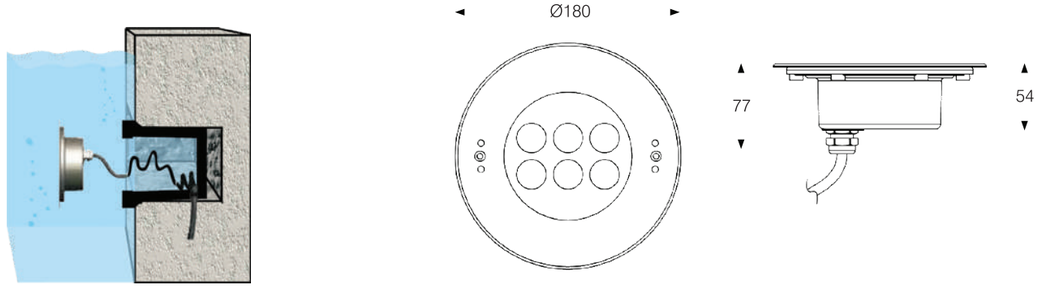


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW205-24LT
Power:	24W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

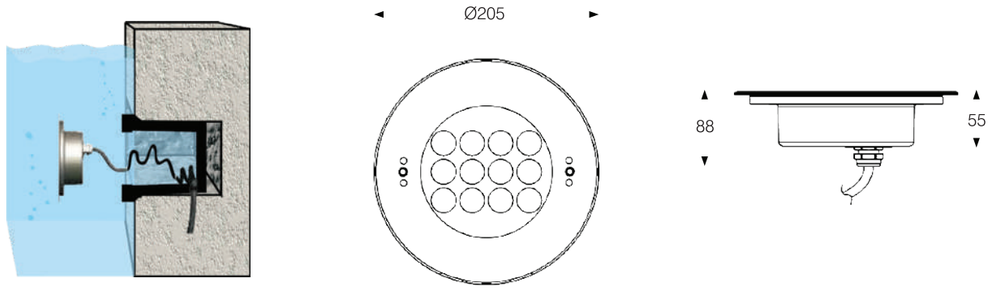


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW250-36LT
Power:	36W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

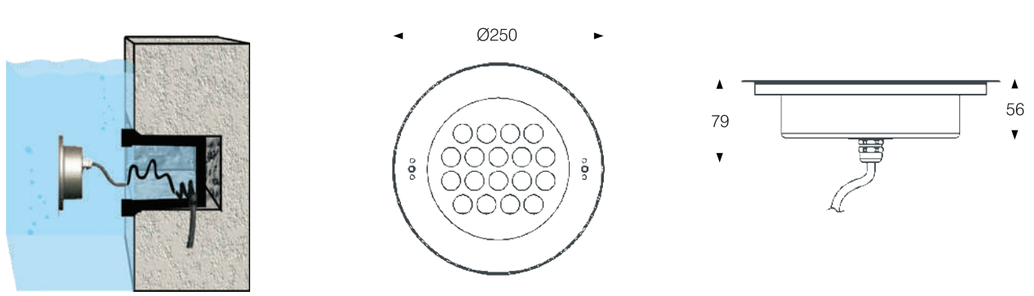


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C





Model:	UW149-12LT	UW170-15LT
Power:	12W	15W
Beam angle:	10°/ 20°/ 30°/ 40°/ 60°/ 90°/ 100°	
Dimensions:		

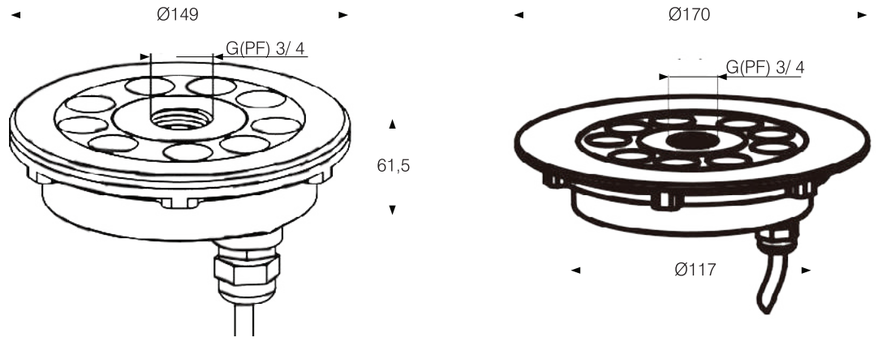


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C





Model:	UW182A-24LT	UW182B-36LT	UW200A-24LT	UW200B-36LT
Power:	24W	36W	24W	36W
Beam angle:	10°/ 15°/ 25°/ 30°/ 60°/ 90°			
Dimensions:				

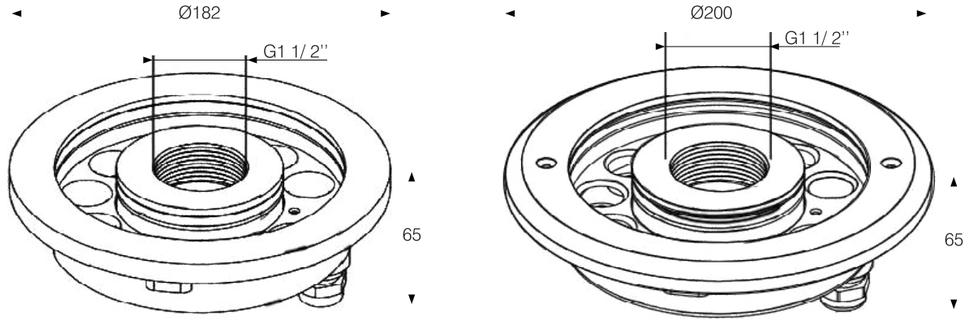


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW160-18LT
Power:	18W
Beam angle:	10°/ 20°/ 30°/ 40°/ 60°/ 90°/ 100°
Dimensions:	

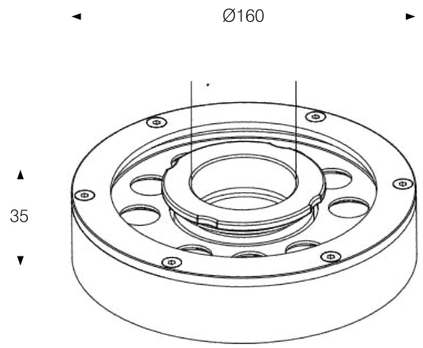


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C




Model:	UW115-12LT
Power:	12W
Beam angle:	10°/ 25°/ 40°/ 60°/ 90°/ 100°
Dimensions:	

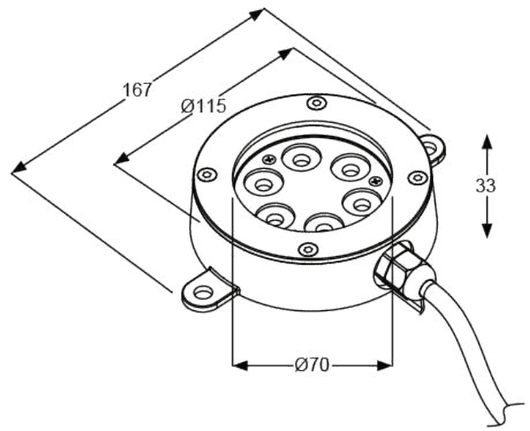


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C

RGB B

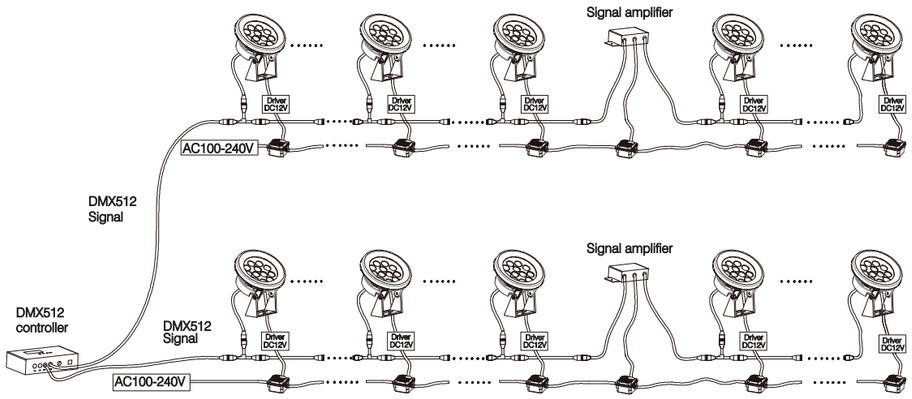

Single color

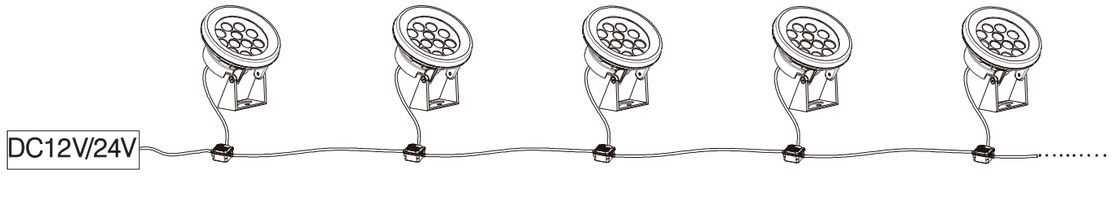









Model:	UW140-10SI	UW140-16SL	UW115-06SL	UW115-12SL
Power:	10W	16W	6W	12W
Beam angle:	8°/ 12°/ 20°/ 30°/ 45°			

Dimensions:

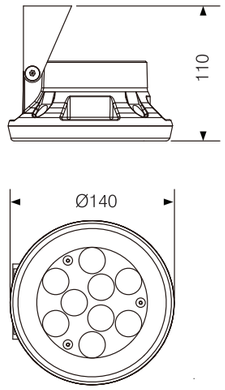


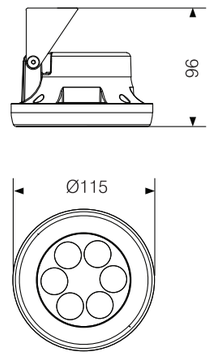

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW153-12LT
Power:	12W
Beam angle:	15°/ 30°/ 40°/ 60°
Dimensions:	

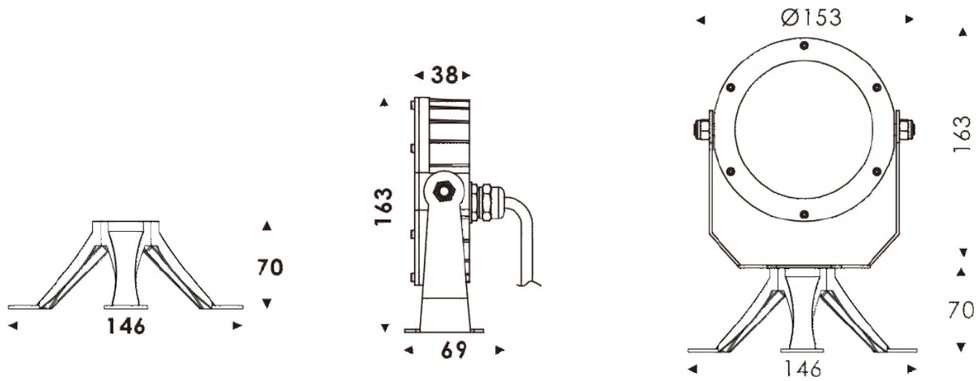


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW153-18LT
Power:	18W
Beam angle:	30°/ 40°/ 60°
Dimensions:	

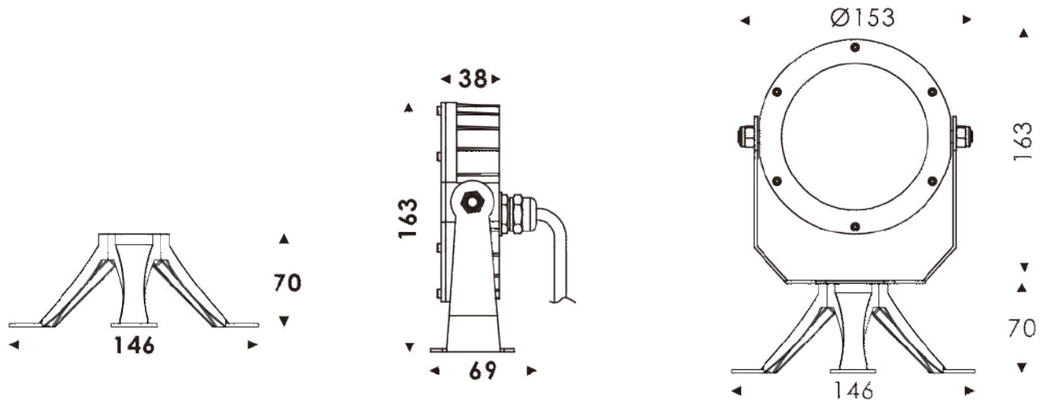


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW180-24LT
Power:	24W
Beam angle:	10°/ 25°/ 40°/ 60°/ 90°
Dimensions:	

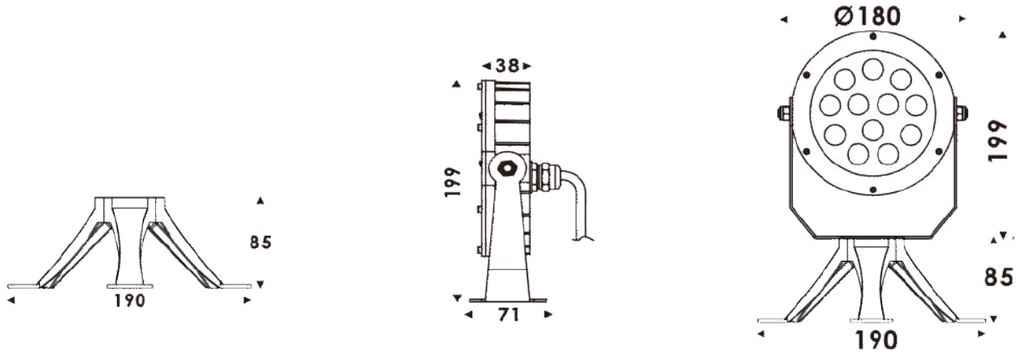


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW220-42LT
Power:	42W
Beam angle:	15°/ 30°/ 40°/ 60°
Dimensions:	

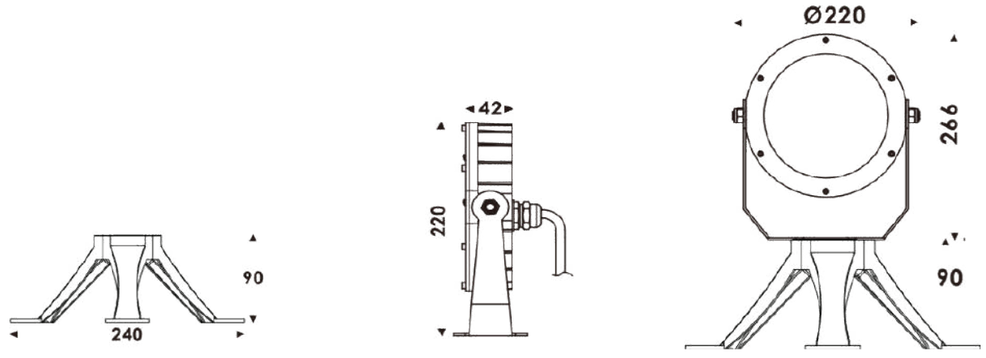


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW113A-06LT
Power:	6W
Beam angle:	15°/ 25°/ 36°/ 40°/ 60°/ 90°
Dimensions:	

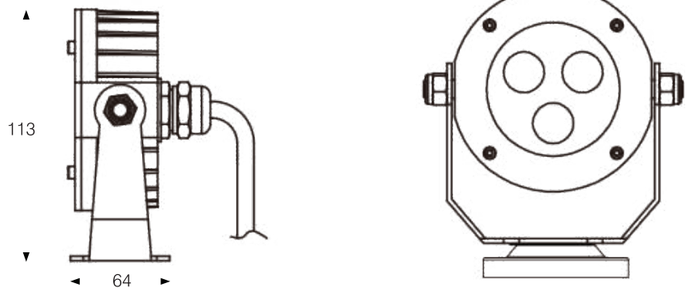


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW113B-06LT
Power:	6W
Beam angle:	15°/ 25°/ 36°/ 40°/ 60°/ 90°
Dimensions:	

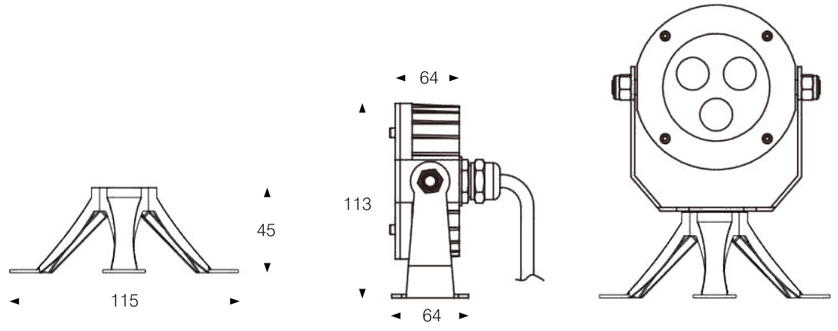


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW190-18LD
Power:	27W
Beam angle:	15°/ 30°/ 45°
Dimensions:	

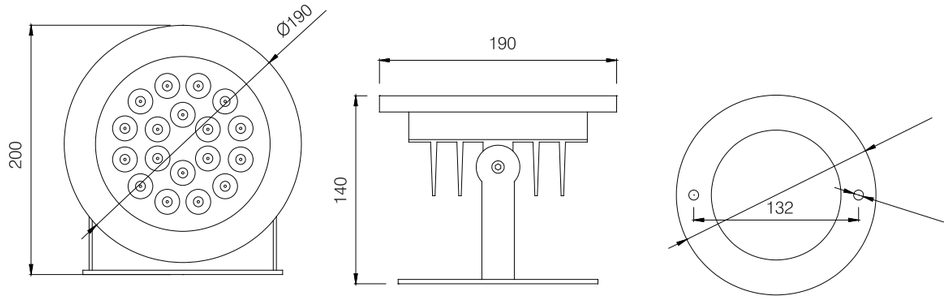


General specifications

LED:	Osram/ Cree
CRI(Ra):	>75
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-40°C～+50°C

UNDERWATER LIGHT



Model:	UW230-36LD
Power:	54W
Beam angle:	15°/ 30°/ 45°
Dimensions:	

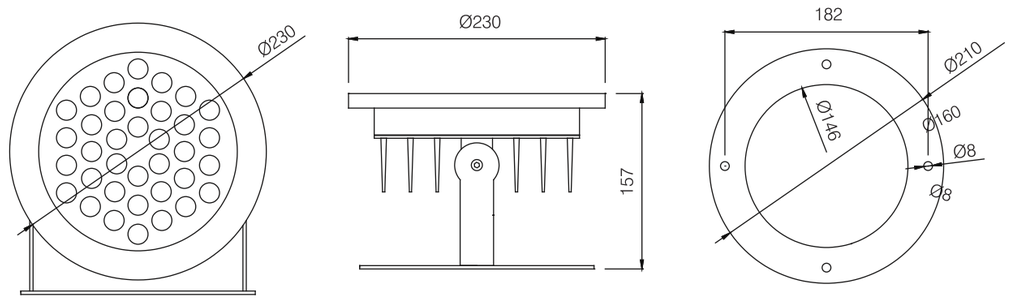


General specifications

LED:	Osram/ Cree
CRI(Ra):	>75
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-40°C～+50°C



Model:	UW224-42LT
Power:	42W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

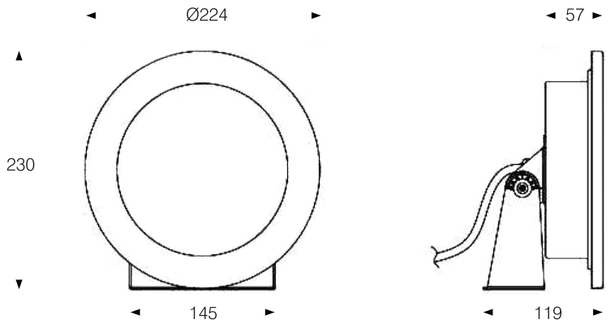


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW195-06LT	UW328-12LT
Power:	6W	12W
Beam angle:	25°/ 40°/ 60°	
Dimensions:		

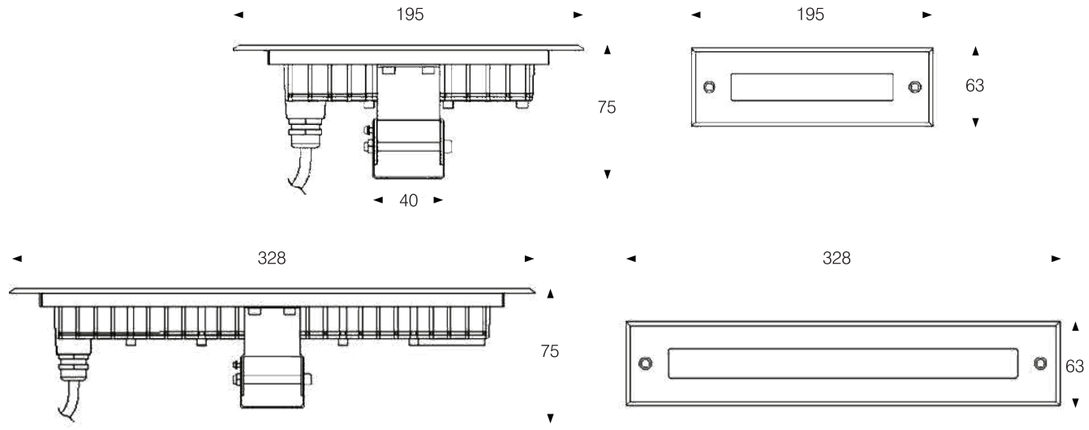



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW195-06LT	UW195-06ALT
Power:	6W	6W
Beam angle:	10°/ 20°/ 30°/ 40°/ 35°x45°	
Dimensions:		



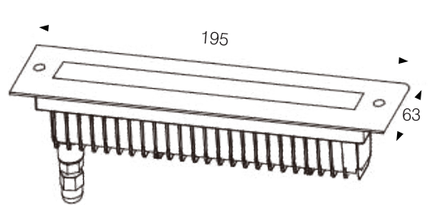



General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C

UNDERWATER LIGHT



Model:	UW328-12LT	UW328-12ALT
Power:	12W	12W
Beam angle:	10°/ 20°/ 30°/ 40°/ 60°/ 35°x45°	
Dimensions:		




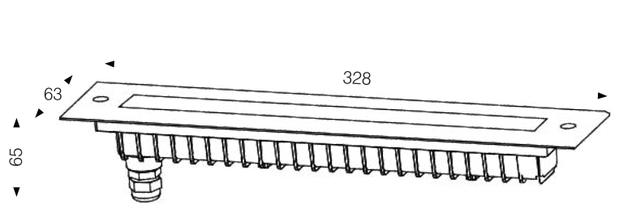


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW250-12LT
Power:	12W
Beam angle:	25°/ 45°/ 60°/ 45x35°
Dimensions:	




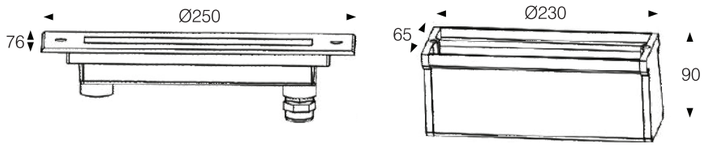


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW135-08LT	UW180-12LT	UW205-24LT	UW250-36LT
Power:	8W	12W	24W	36W
Beam angle:	24°/ 36°/ 60°			
Dimensions:				



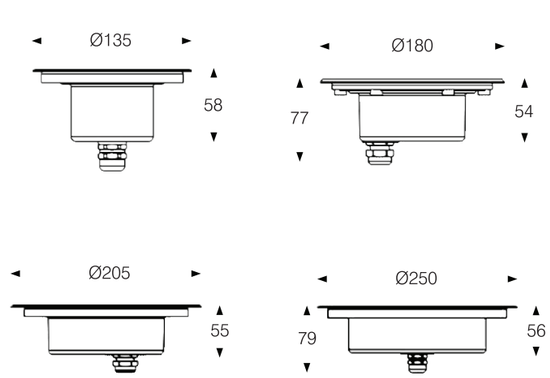

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C




Model:	UW42-03LT
Power:	3W
Beam angle:	5°/ 10°/ 13°/ 15°/ 16°/ 25°/ 36°/ 40°/ 57°/ 60°
Dimensions:	

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C

UNDERWATER LIGHT




Model:	UW65-06LT
Power:	6W
Beam angle:	5°/10°/ 11°/ 13°/ 15°/ 16°/ 25°/ 36°/ 40°/ 57°/ 60°
Dimensions:	

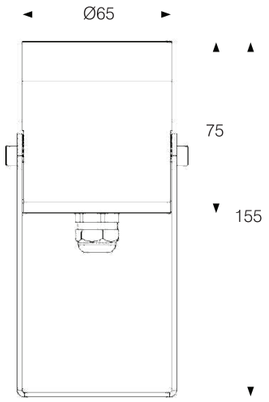

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C




Model:	UW70-06LT	UW100-15LT	UW122-24LT
Power:	6W	15W	24W
Beam angle:		5°/ 10°/ 15°/ 25°/ 36°/ 40°/ 60°	
Dimensions:			

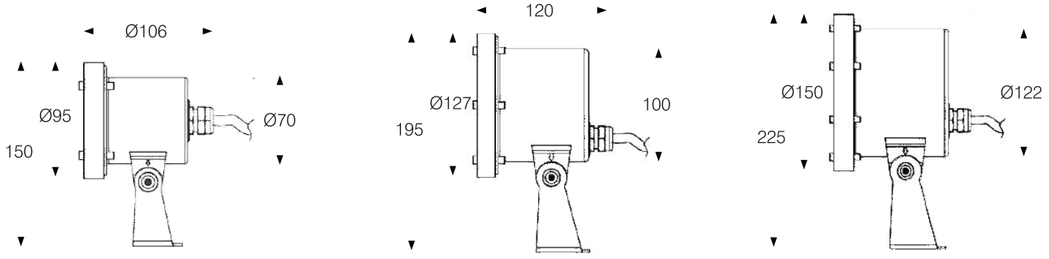

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW65-07LT	UW95-12LT	UW120-18LT
Power:	7W	12W	18W
Beam angle:		5°/ 10°/ 15°/ 25°/ 36°/ 40°/ 60°	
Dimensions:			

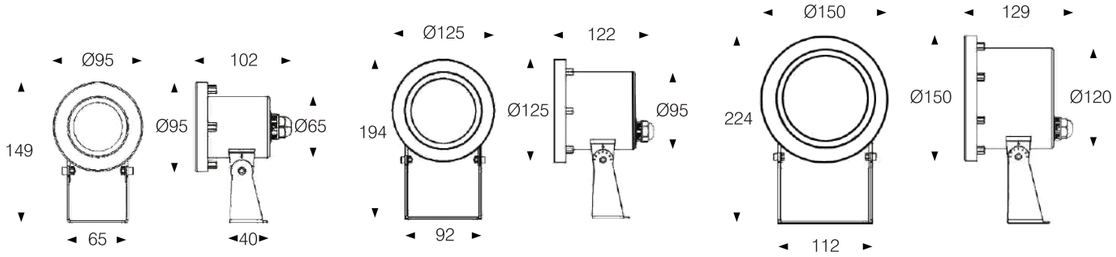

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW60-02LT
Power:	2,5W
Beam angle:	9°/ 15°/ 20°/ 30°/ 45°
Dimensions:	

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	UW61-02LT
Power:	2W
Beam angle:	30°/ 40°/ 60°
Dimensions:	


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C





Model:	IG5501	IG5503	IG6505
Power:	1W	3W	5W
Beam angle:	120°	28°/ 43°	

Dimensions:

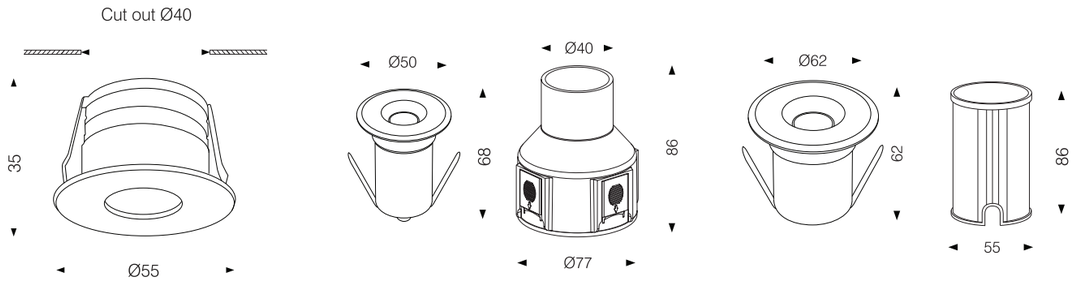

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	3000K/ 4000K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Diffuser Glass, Honeycomb








Model:	IG10-0.2LT	IG20-0.6LT	IG30-0.6LT
Power:	0,2W	0,6W	0,6W
Beam angle:		120°	

Dimensions:

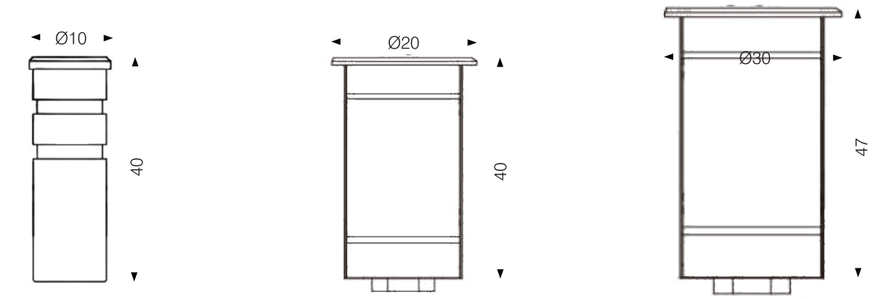


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	3000K/ 4000K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Diffuser Glass, Honeycomb



Model:	IG95-03LT
Power:	3W
Beam angle:	5°/ 10°/ 15°/ 30°/ 40°/ 60°
Dimensions:	



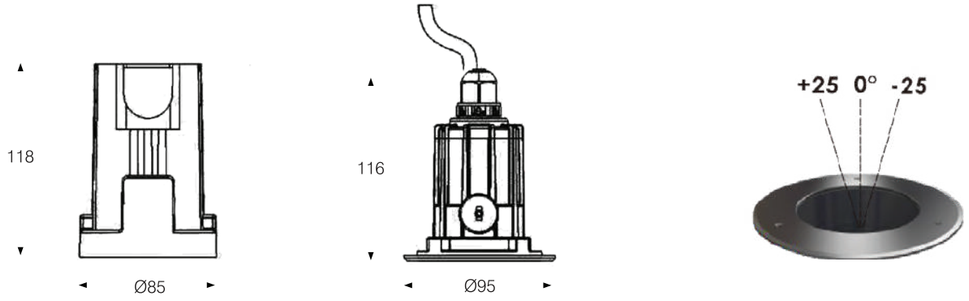


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Diffuser Glass, Honeycomb



Model:	IG139-06LT
Power:	6W
Beam angle:	10°/ 15°/ 25°/ 40°/ 60°/ 10x65°/ 18x20°/ 20x55°
Dimensions:	

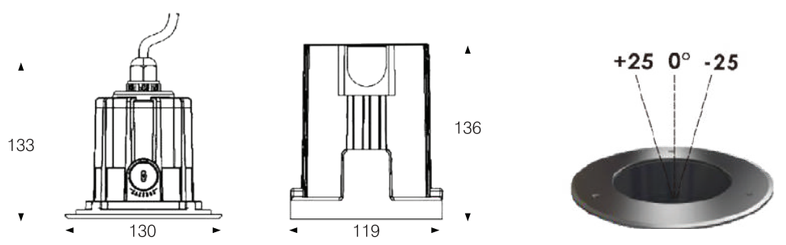


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Diffuser Glass, Honeycomb



Model:	IG160-12LT
Power:	12W
Beam angle:	10°/ 15°/ 25°/ 40°/ 60°/ 90°/ 10x45°/ 20x65°/ 15x55°
Dimensions:	

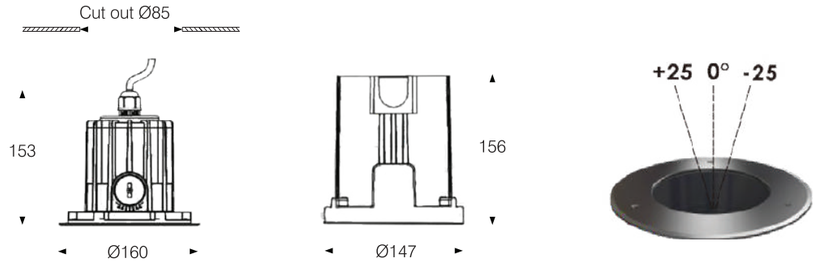


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Diffuser Glass, Honeycomb



Model:	IG180-18LT
Power:	18W
Beam angle:	10°/ 15°/ 30°/ 40°/ 60°/ 90°/ 10x45°/ 20x65°
Dimensions:	

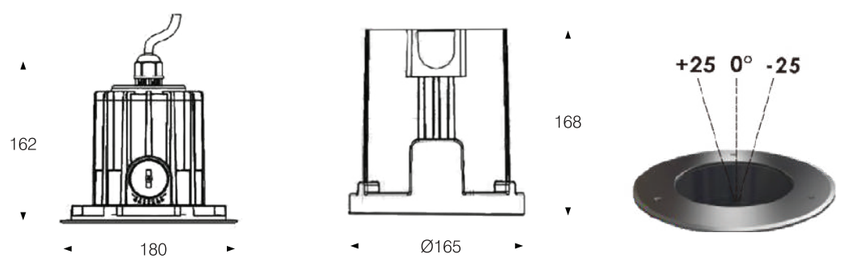


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Diffuser Glass, Honeycomb



Model:	IG210-24LT
Power:	24W
Beam angle:	10°/ 15°/ 25°/ 40°/ 60°/ 90°/ 10x45°/ 20x65°/ 15x55°
Dimensions:	

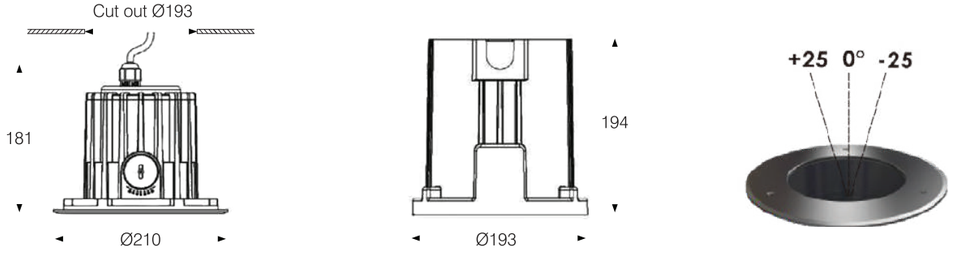


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Diffuser Glass, Honeycomb



Model:	IG250-36LT
Power:	36W
Beam angle:	10°/ 15°/ 30°/ 40°/ 60°/ 90°/ 10x45°/ 20x65°
Dimensions:	

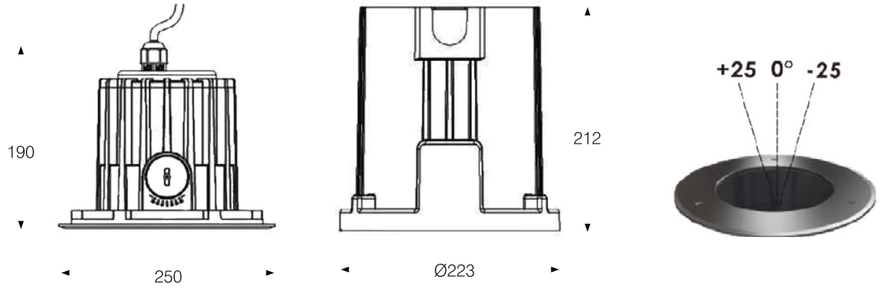

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Diffuser Glass, Honeycomb





Model:	IG280-30SL	IG280-40SL
Power:	30W	40W
Beam angle:	2°/ 4,5°/ 8°/ 12°/ 30°/ 40°	

Dimensions:

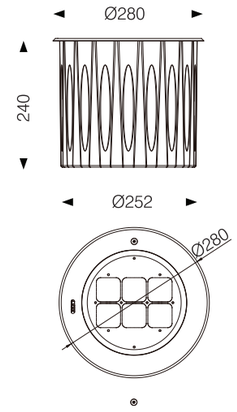


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb Grill, Anti-slip Glass






Model:	IG155-10WRL
Power:	10W
Beam angle:	20°/ 30°/ 40°/ 30x60°/ 40x85°/ 50x95°
Dimensions:	

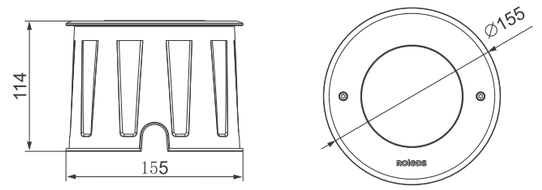

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C～+40°C
Ancessory	Bullseyes Louvre




Model:	IG200-20WRL
Power:	20W
Beam angle:	20°/ 30°/ 40°/ 35x53°/ 40x70°/ 50x95°
Dimensions:	

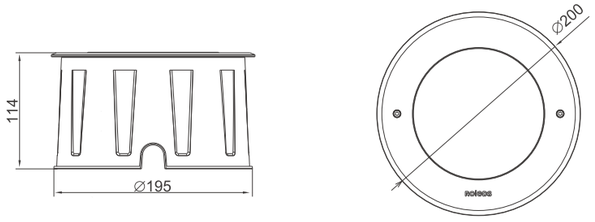


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C～+45°C

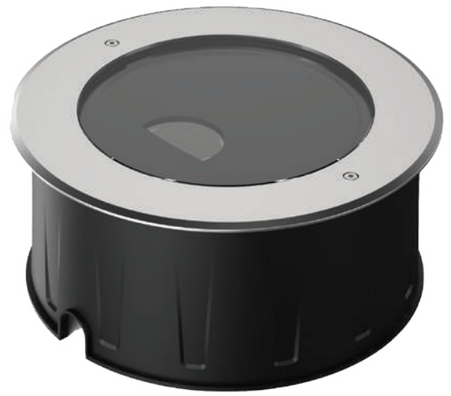

Model:	IG260-30WRL
Power:	30W
Beam angle:	20°/ 30°/ 40°/ 35x53°/ 40x70°/ 50x95°
Dimensions:	

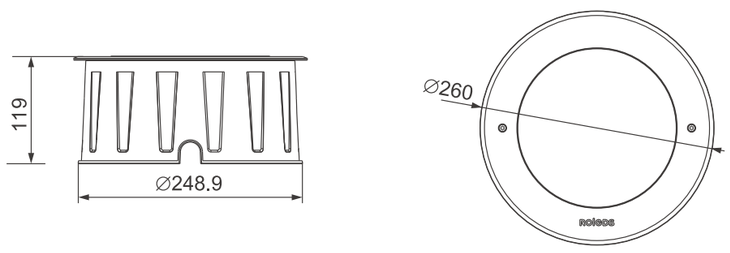


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C～+45°C





Model:	IG200-18RL	IG200-24RL
Power:	18W	24W
Beam angle:	7°/ 15°/ 30°/ 45°/ 60°/ 15x60°	
Dimensions:		

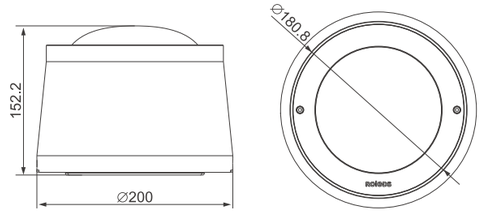


General specifications

LED:	Osram/ Cree
CRI(Ra):	＞85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB
IP rating:	67
Lifetime:	＞50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C～+45°C
Ancessory	Honeycomb




Model:	IG250-30RL	IG250-36LT
Power:	30W	36W
Beam angle:	7°/ 15°/ 30°/ 45°/ 60°/ 15x60°	
Dimensions:		

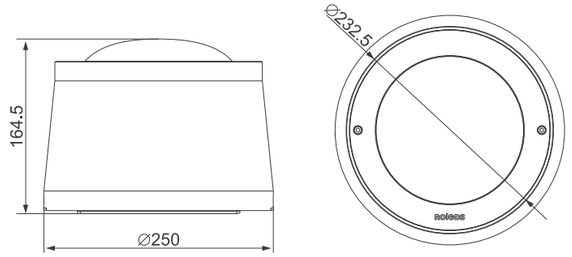

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C～+45°C
Ancessory	Honeycomb




Model:	IG320-48RL	IG320-54LT
Power:	48W	54W
Beam angle:	7°/ 15°/ 30°/ 45°/ 60°/ 15x60°	
Dimensions:		

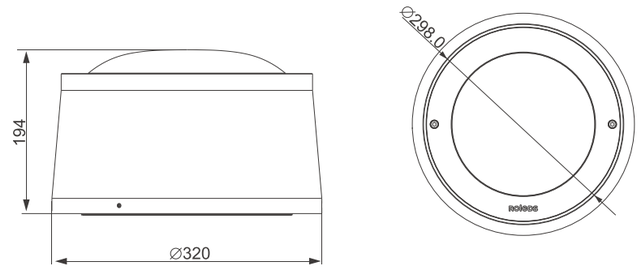


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C～+45°C
Ancessory	Honeycomb



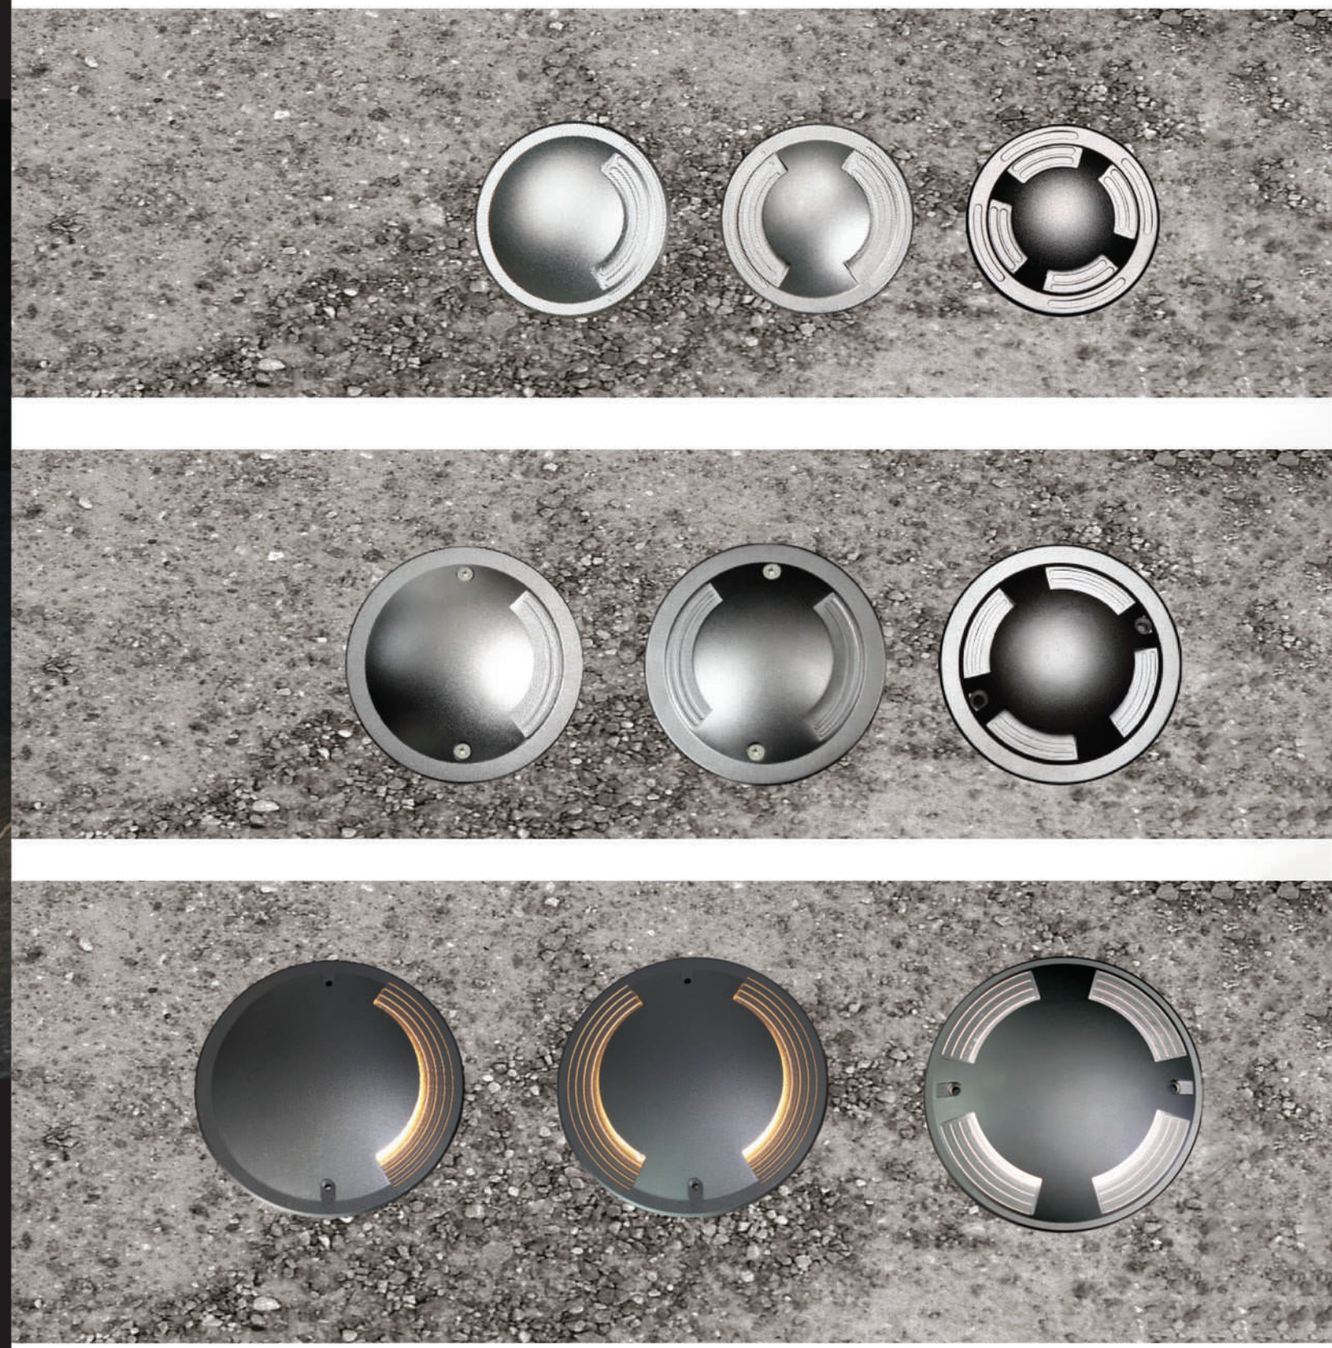




Model:	IG55-02AL
Power:	2W
Beam angle:	1 Way/ 2 Way/ 4 Way
Dimensions:	

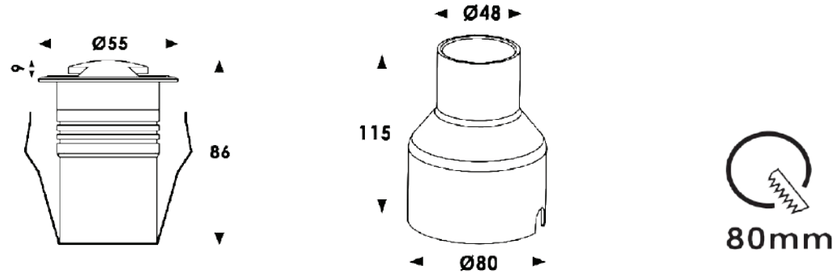

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C



Model:	IG70-01AL	IG70-02AL
Power:	1W	2W
Beam angle:	1 Way/ 2 Way	
Dimensions:		

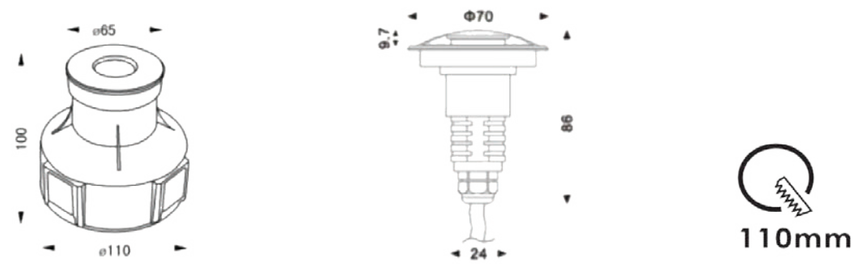


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C



Model:	IG116-02AL
Power:	2W
Beam angle:	1 Way/ 2 Way/ 4 Way
Dimensions:	

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C

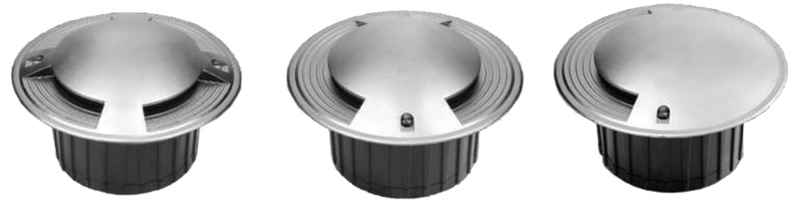


Model:	IG173-05AL	IG173-12AL
Power:	5W	12W
Beam angle:	1 Way/ 2 Way/ 4Way	
Dimensions:		

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C




Model:	IG116-01AL	IG116-04LT	IGG116-06AL
Power:	1,6W	4W	6W
Beam angle:		1 Way/ 2 Way/ 4 Way	
Dimensions:			

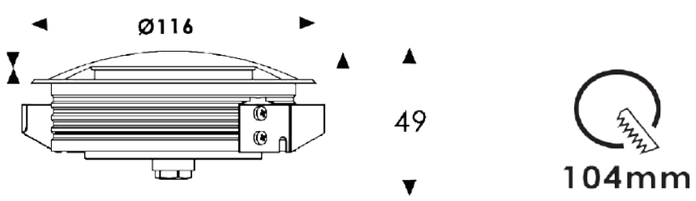

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C




Model:	IG328-05ALT	IG328-12ALT
Power:	5W	12W
Beam angle:	1 Way/ 2 Way/ 4 Way	
Dimensions:		

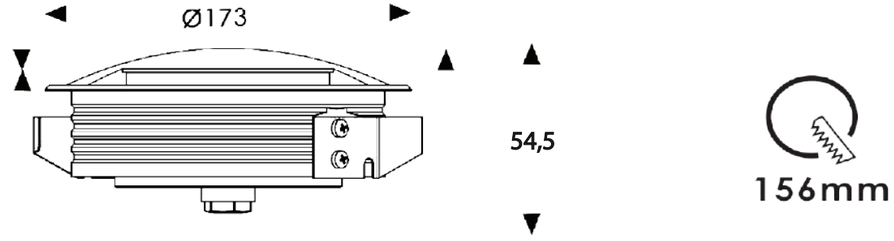


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C




Model:	IG44-02AL	IG70-06AL
Power:	2W	6W
Beam angle:	15°/ 24°/ 40°/ 60°	20°/ 38°/ 40°
Dimensions:		

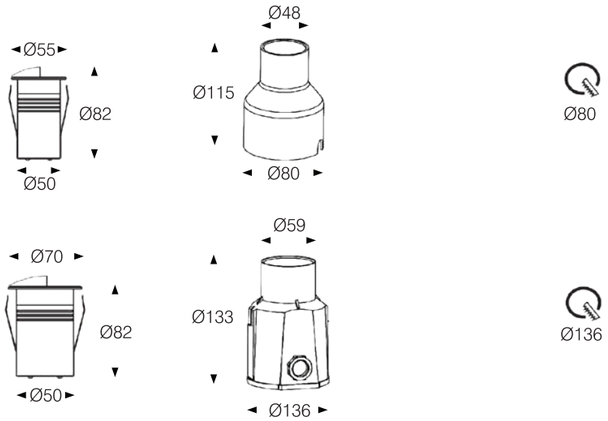

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C

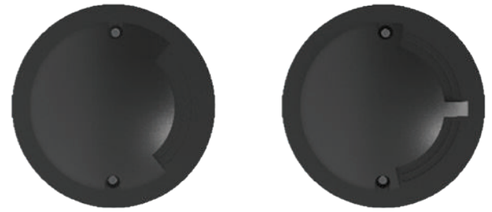

Model:	IG120-01AL	IG120-04AL	IG120-06AL
Power:	1,6W	4W	6W
Beam angle:		1 Way/ 2 Way	
Dimensions:			

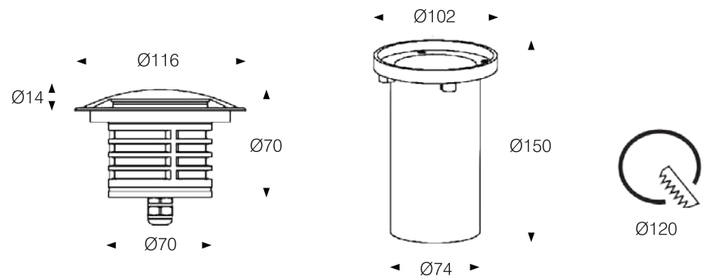


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainess steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C




Model:	IG98-18RL	IG98-24RL	IG98-36RL
Power:	18W	24W	36W
Beam angle:	15°/ 30°/ 45°/ 60°/ 20°x40°/ 15°x60°		
Dimensions:			

L=1000/ 500/ 300mm

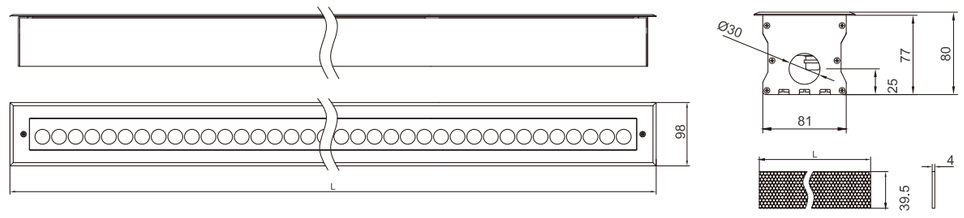


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-30°C～+45°C

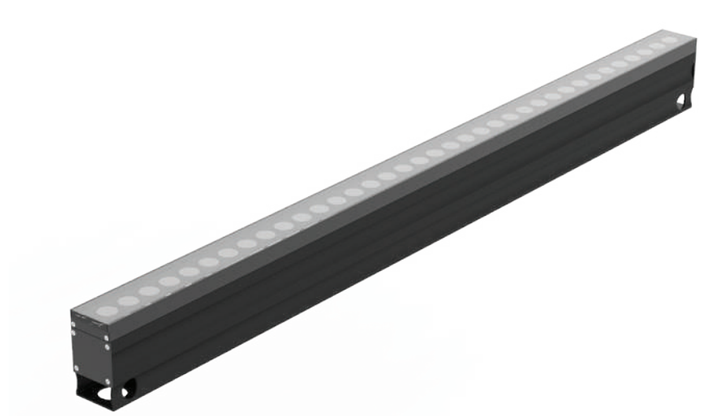


Model:	IG90-36RL	IG90-48RL
Power:	36W	48W
Beam angle:	15°/ 30°/ 45°/ 60°/ 15°x45°/ 20°x40°/ 15°x60°	
Dimensions:		

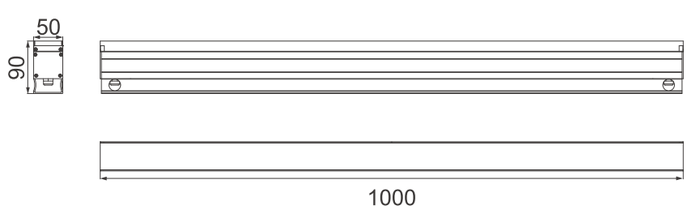


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C～+45°C
Ancessory	Honeycomb, Louvre

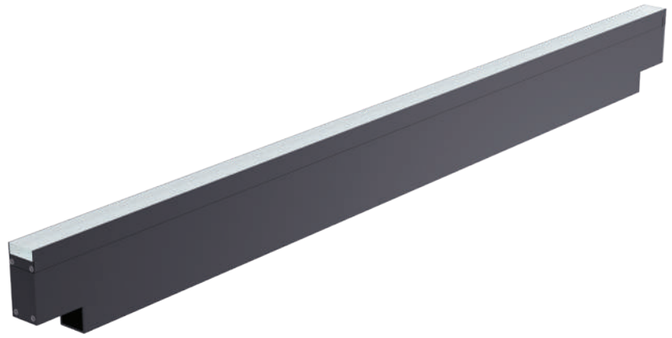


Model:	IG30-10RL	IG30-15RL
Power:	10W	15W
Beam angle:	120°	
Dimensions:		

L=1000/ 500/ 300mm

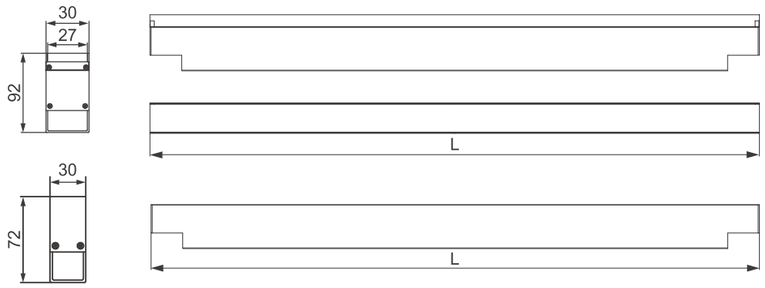


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-30°C～+45°C

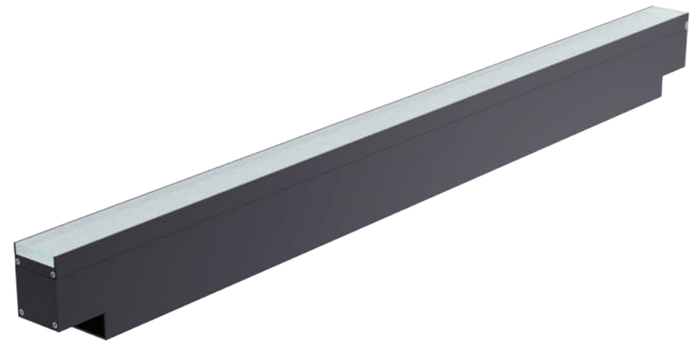

Model:	IG50-10RL	IG50-12RL	IG50-15RL
Power:	10W	12W	15W
Beam angle:		120°	
Dimensions:			

L=1000/ 500/ 300mm

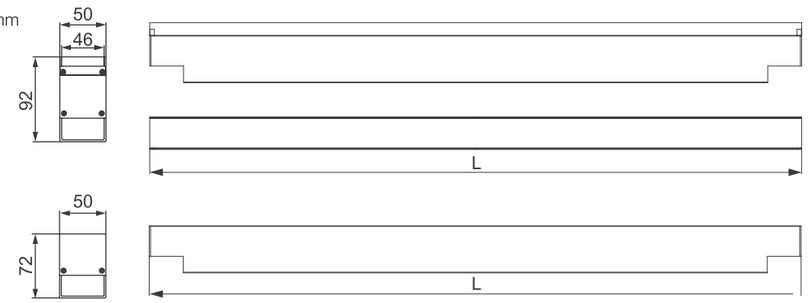


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-30°C～+45°C



Model:	IG67-18LD	IG67-24LD	IG67-28LD
Power:	18W	24W	28W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°/ assymetrical lens also		

Dimensions:

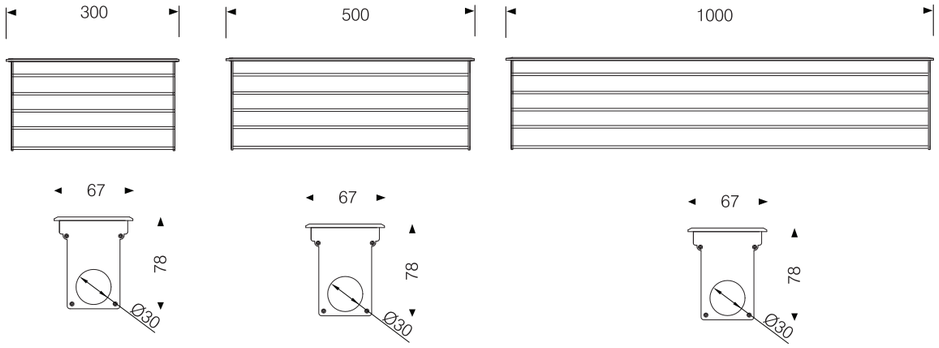


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb




Model:	IG43-18LD	IG43-24LD	IG43-28LD
Power:	18W	24W	28W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°/ assymetrical also		

Dimensions:

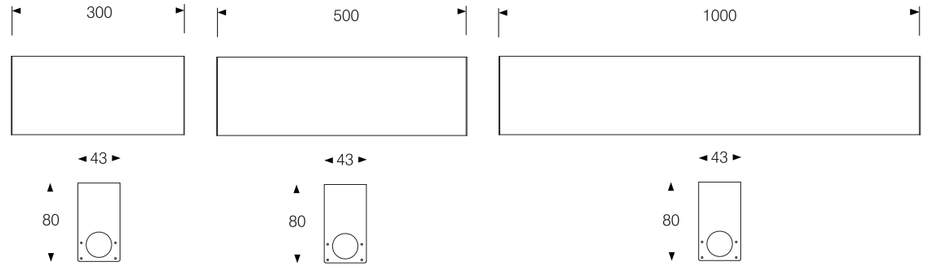


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb

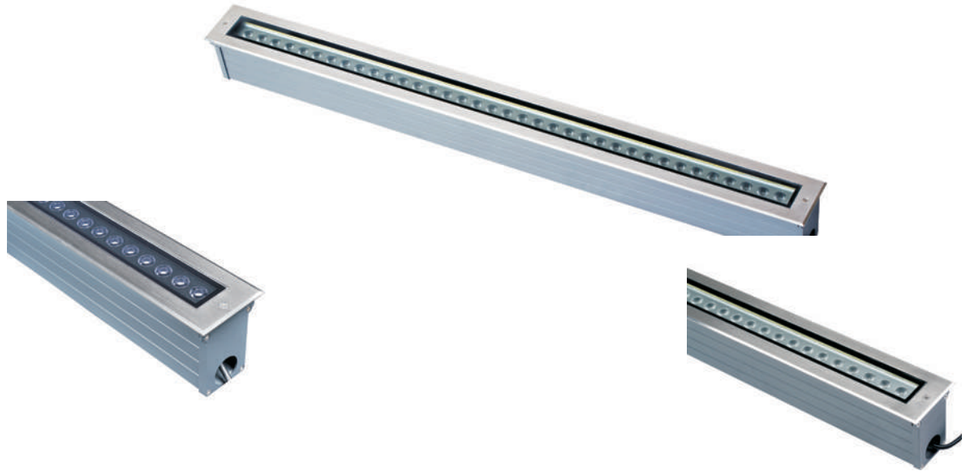

Model:	IG90-36LD	IG90-48LD	IG90-54LD
Power:	36W	48W	54W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°/ assymetrical lens also		

Dimensions:

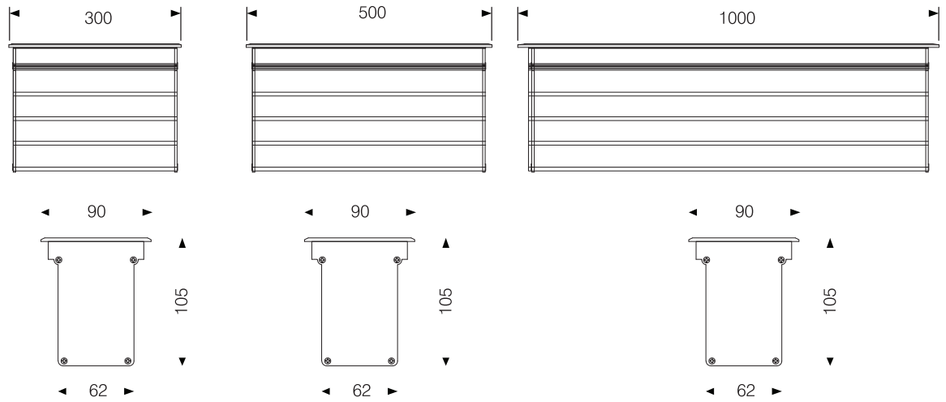

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover, 304 or 316 stainless frame cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb






Model:	LN24-12RL	LN24-14RL	LN24-15RL
Power:	12W	14W	15W
Beam angle:		30°/ 45°/ 25°x45°	

Dimensions:

L=1000/ 500/ 300mm

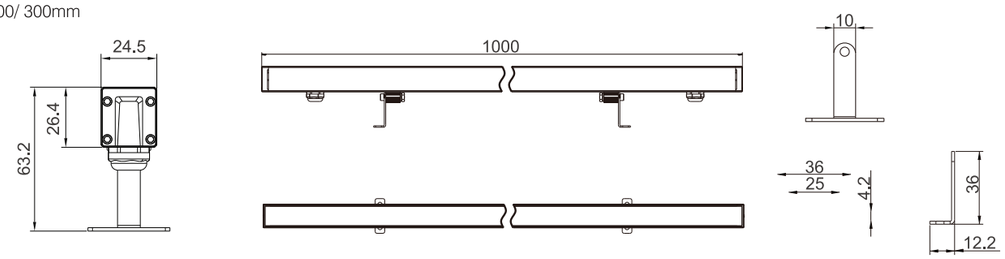

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-40°C～+50°C
Ancessory	Grille Louvre, Lightt Baffle, T-shape brackett



Model:	LN33-18RL	LN33-24RL
Power:	18W	24W
Beam angle:	20°/ 30°/ 45°/ 20°x40°	

Dimensions:

L=1000/ 500/ 300mm


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	DC24V
Operating temperature:	-40°C～+55°C
Ancessory	Grille Louvre, Light Baffle, Semicirle Bullseye Louvre, T-shape bracket



Model:	LN38-24RL	LN38-36RL	LN38-48RL
Power:	24W	36W	48W
Beam angle:	7°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x40°		
Dimensions:			

L=1000/ 500/ 300mm

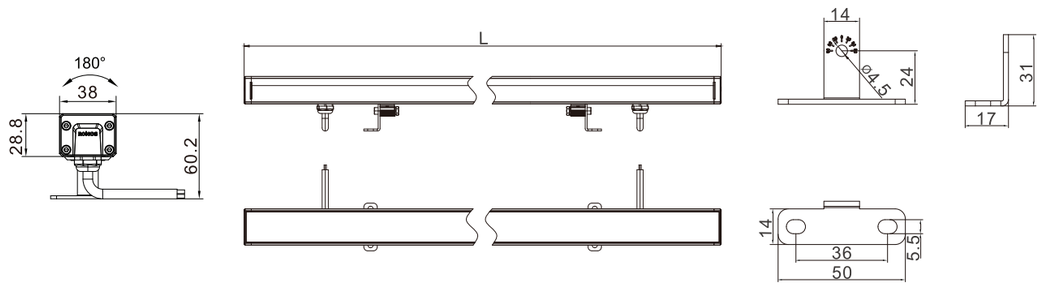


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW/ BICOLOR
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512, DMX 8Pixel…
Voltage:	DC24V
Operating temperature:	-40°C～+50°C
Ancessory	Grille Louvre, Light Baffle, T-shape bracket



Model:	LN65-48RL	LN65-60RL
Power:	48W	60W
Beam angle:	7°/ 15°/ 22°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x40°	
Dimensions:		

L=1000/ 500/ 300mm

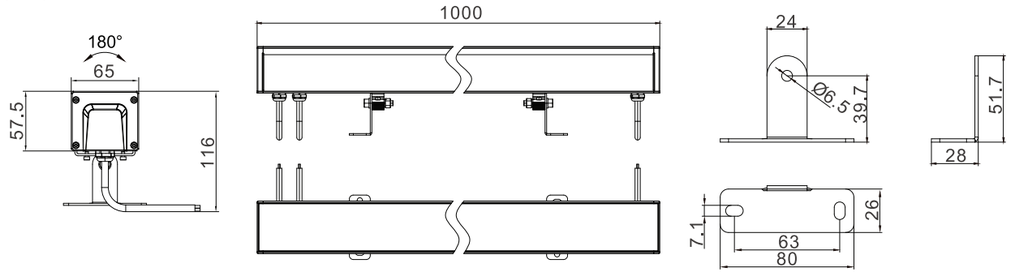


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW/ 5in1/ 7in1
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512, DMX 1Pixel…
Voltage:	AC100-240V
Operating temperature:	-40°C～+55°C
Ancessory	Grille Louvre, Light Baffle, T-shape bracket



Model:	LN22-12RL	LN22-15RL
Power:	12W	15W
Beam angle:	30°/ 45°/ 25°x45°	
Dimensions:		

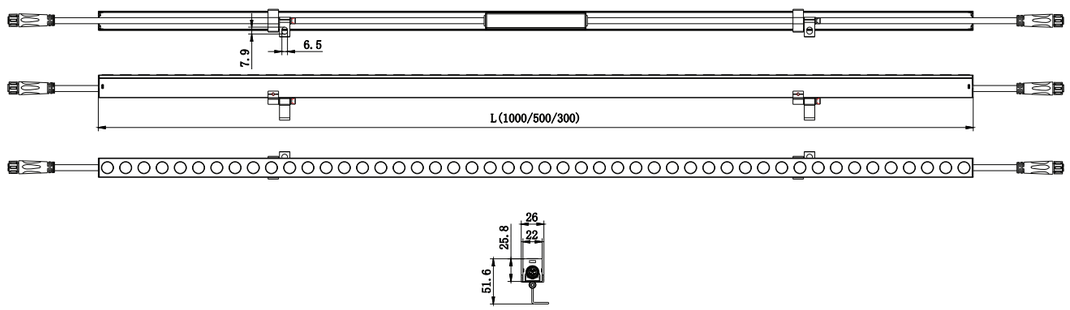


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-30°C～+45°C
Ancessory	Anti-Glare Baffle, Clip bracket, T-shape bracket




Model:	LN30-24RL
Power:	24W
Beam angle:	20°/ 30°/ 45°/ 60°/ 20°x40°
Dimensions:	

L=995/ 660/ 330mm

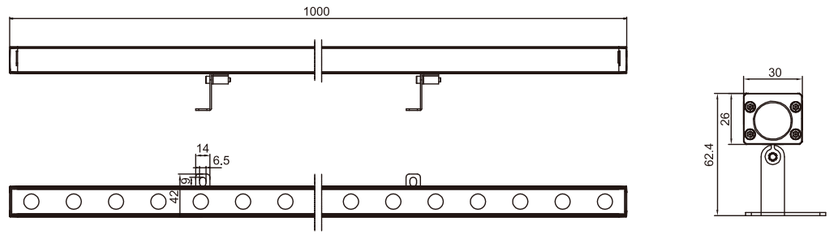


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-30°C～+45°C
Ancessory	Anti-Glare Baffle, T-shape bracket

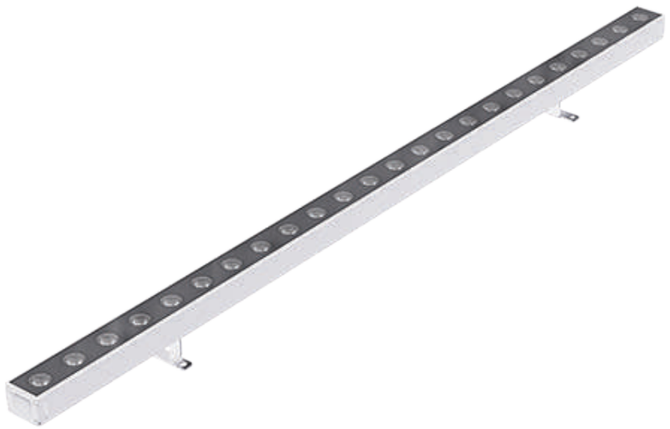

Model:	LN42-36RL	LN42-48RL
Power:	36W	48W
Beam angle:	15°/ 30°/ 45°/ 60°/ 20°x40°/ 15°x60°	
Dimensions:		

L=995/ 660/ 330mm

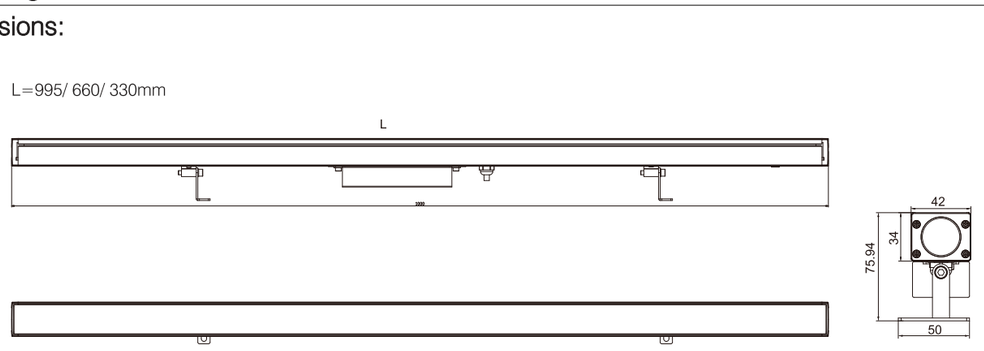

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-30°C～+45°C
Ancessory	Anti-Glare Baffle, T-shape bracket



Model:	LN56-60RL	LN56-72RL
Power:	60W	72W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 20°x40°/ 15°x60°	
Dimensions:		

L=995/ 660/ 330mm


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Anti-Glare Baffle, T-shape bracket



Model:	LN66-60RL	LN66-72RL
Power:	60W	72W
Beam angle:	3,5°/ °8/ 15°/ 30°	


Dimensions:

L=1000/ 500/ 300mm

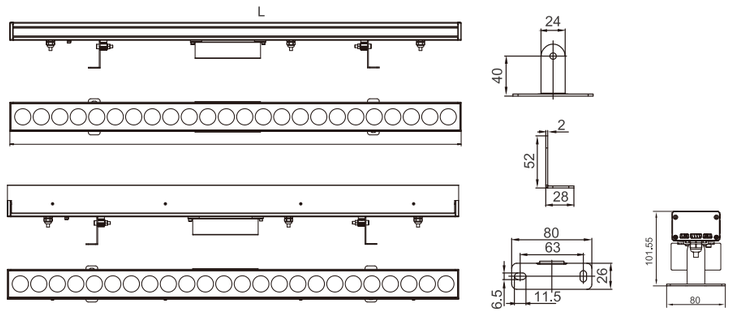

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC100-220V/ AC220V
Operating temperature:	-30°C～+45°C
Ancessory	Anti-Glare Baffle, T-shape bracket

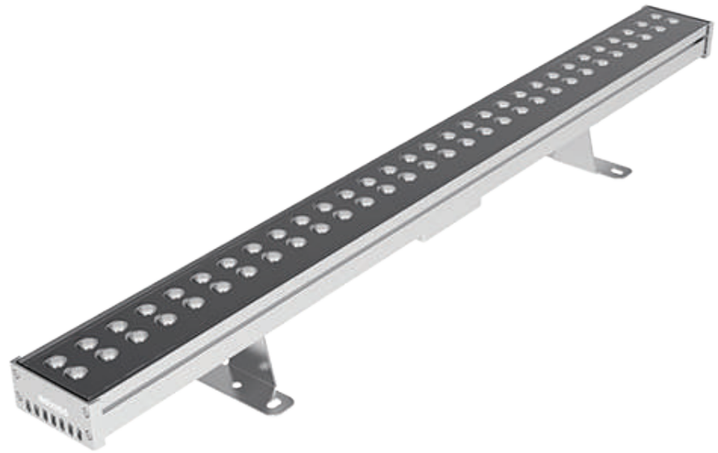

Model:	LN90-120RL
Power:	120W
Beam angle:	7°/ 15°/ 30°/ 45°/ 60°/ 20°x45°/ 15°x60°

Dimensions:

L=1000/ 500/ 300mm

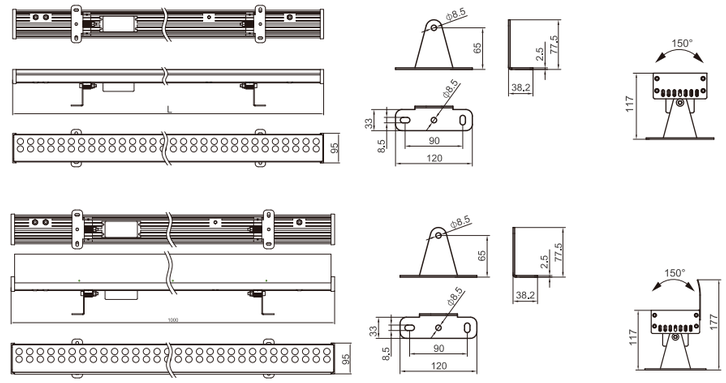

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-30°C～+45°C
Ancessory	T-shape bracket



Model:	LN100-120RL	LN100-150RL
Power:	120W	150W
Beam angle:	3,5°/ 8°/ 15°/ 30°	

Dimensions:

L=1000/ 500/ 300mm

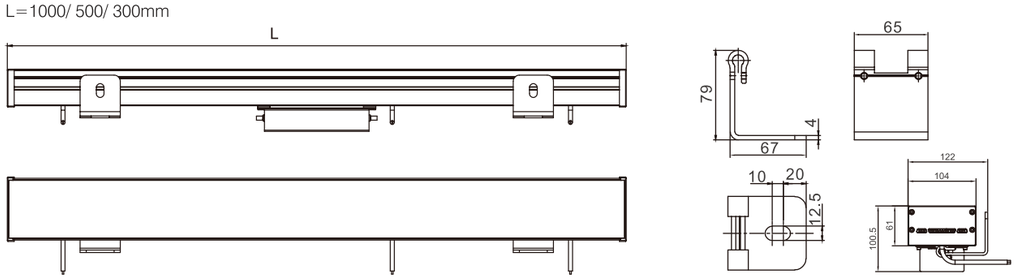

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-30°C～+45°C
Ancessory	Anti-Glare Baffle, T-shape bracket



Model:	LN15-48RL
Power:	48W
Beam angle:	120°


Dimensions:

L=1000/ 500/ 300mm

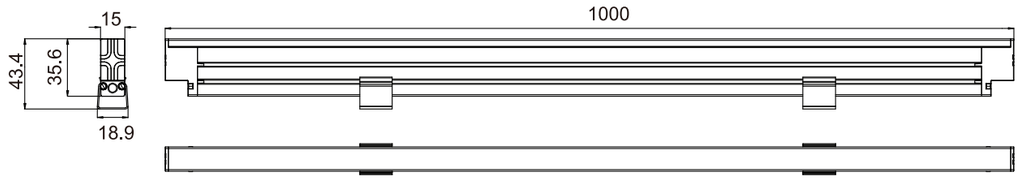


General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-40°C～+45°C

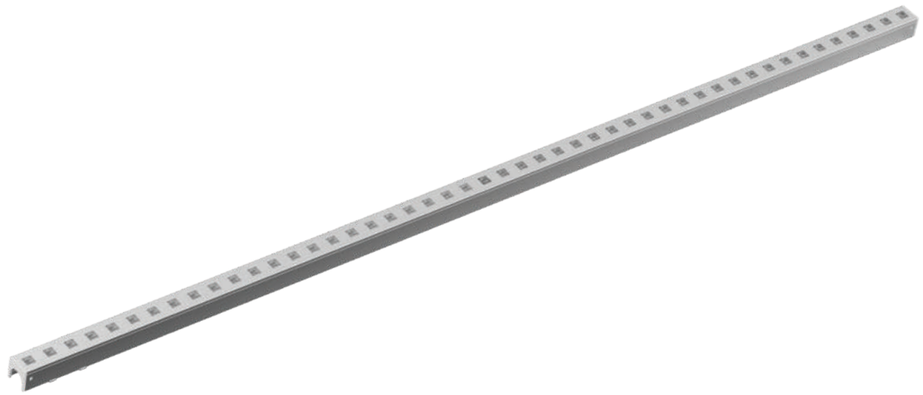

Model:	LN23-15RL
Power:	15W
Beam angle:	45°/ 60°/ 120°
Dimensions:	

L=1000/ 500/ 300mm

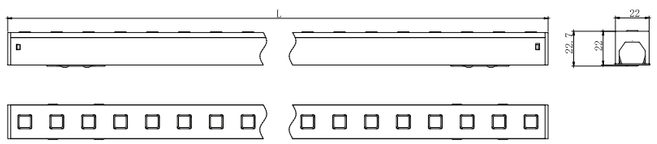

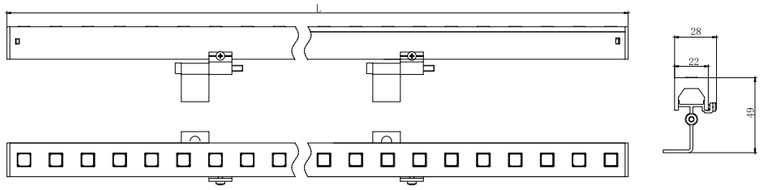


General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-40°C～+45°C



Model:	LN25-12RL	LN25-15RL
Power:	12W	15W
Beam angle:	120°	
Dimensions:		

L=1000/ 500/ 300mm

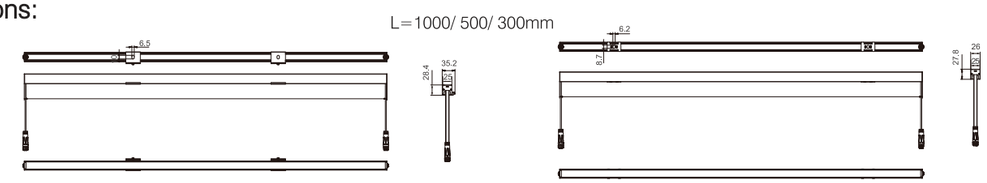

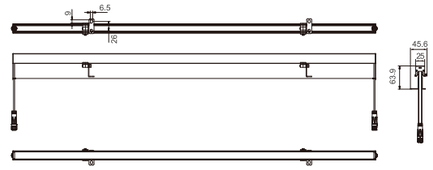


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-30°C～+50°C



Model:	LN22-12LD
Power:	12W
Beam angle:	120°

Dimensions:

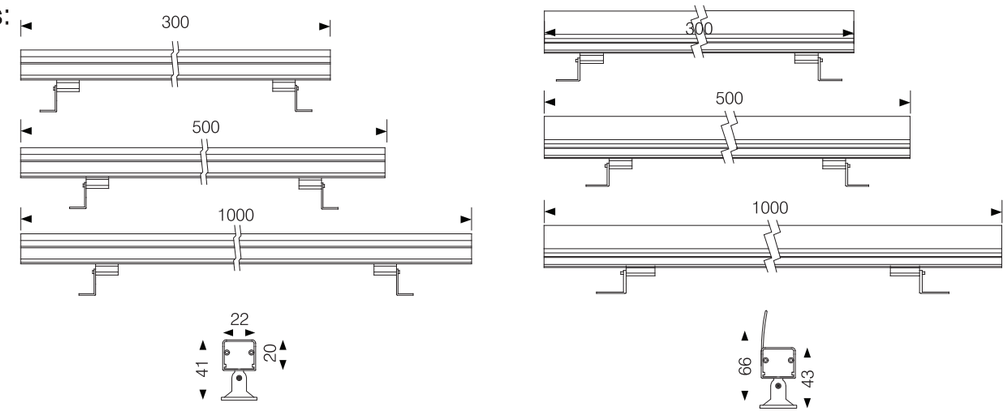


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb




Model:	LN32-12LD
Power:	12W
Beam angle:	25°/ 45°/ 60°

Dimensions:

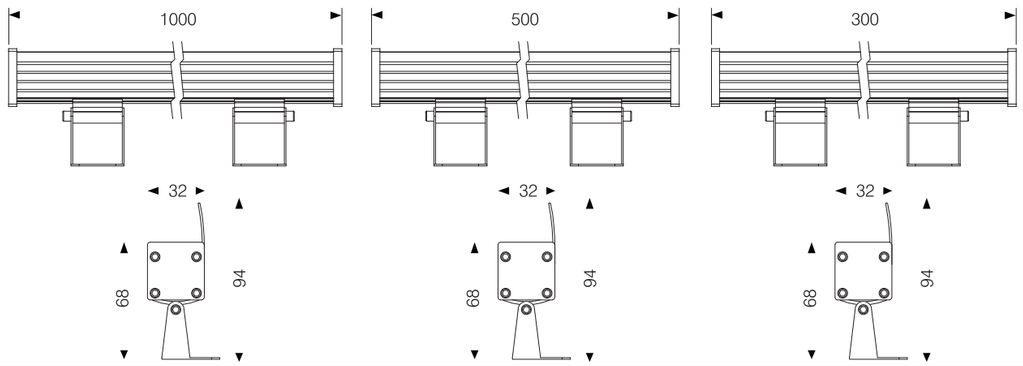


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb

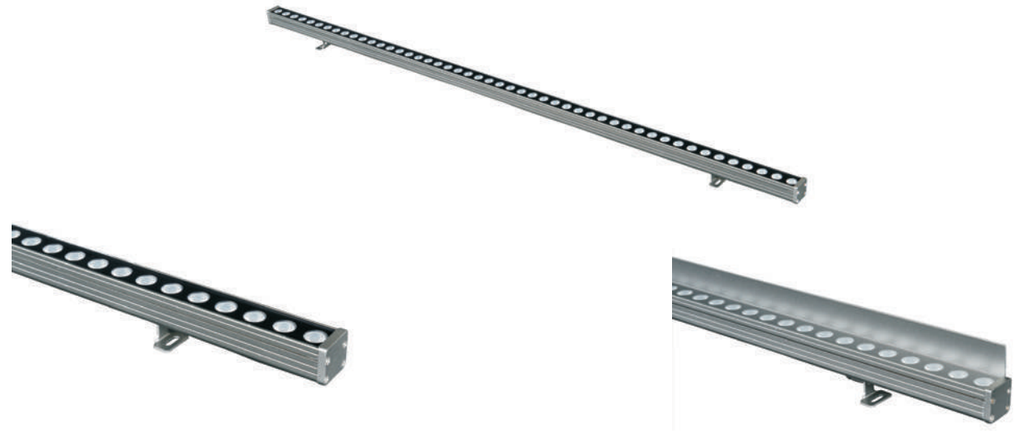

Model:	LN26-12LD
Power:	12W
Beam angle:	25°/ 45°/ 60°

Dimensions:

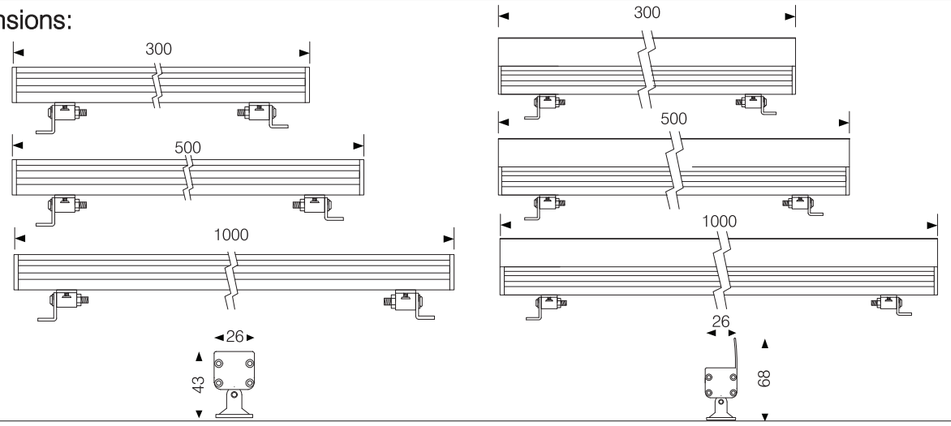


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb




Model:	LN34-18LD
Power:	18W
Beam angle:	15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

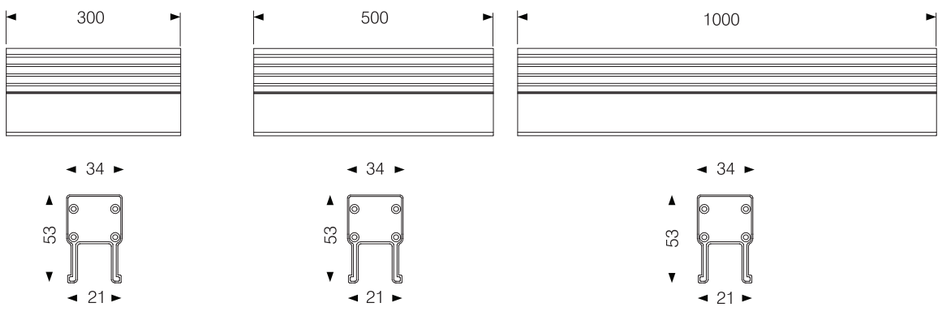


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb

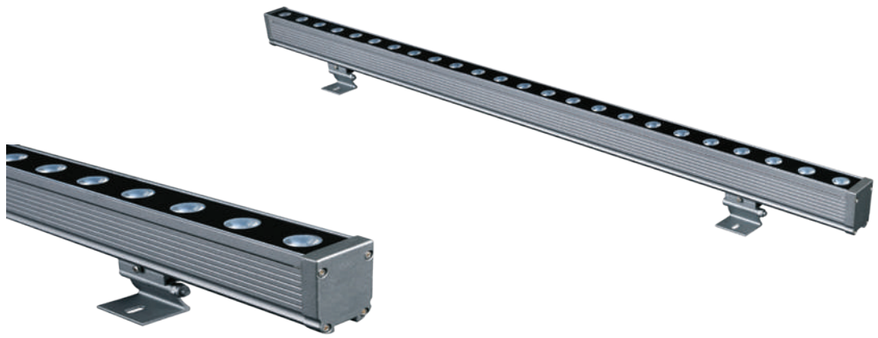

Model:	LN39-24LD
Power:	24W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

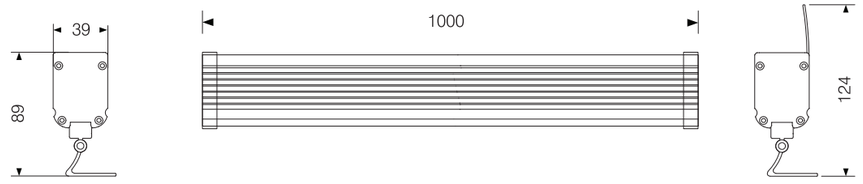


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	LN75-48LD
Power:	48W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

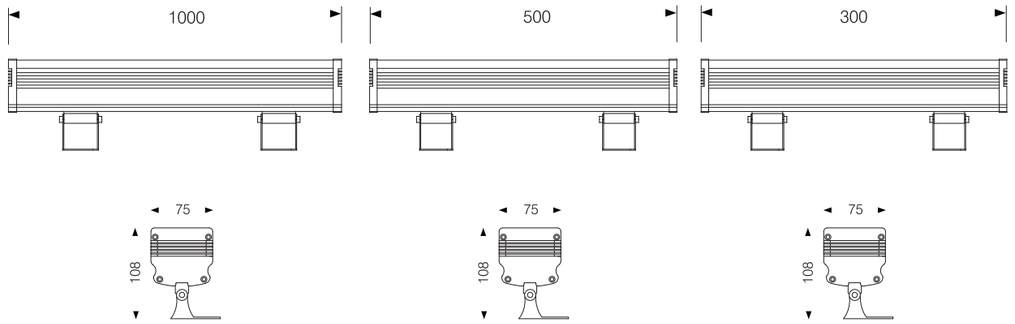


General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb





Model:	LN23-19LT
Power:	19W
Beam angle:	20°/ 30°/ 40°/ 55°/ 20°x30°
Dimensions:	

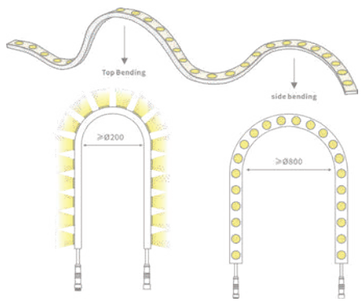





General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C



Model:	LN38-11LT	LN38-22LT	LN38-33LT	LN38-45LT	LN38-90LT
Power:	11W	22W	33W	45W	90W
Beam angle:	15°/ 20°/ 20°x40°/ 20°x50°				
Dimensions:					

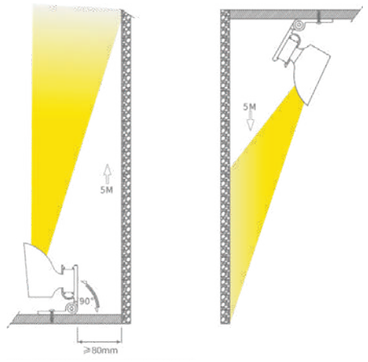



General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C





Model:	GD110-15LD	GD110-30LD
Power::	15W	30W
Beam angle:	24°/ 38°/ 60°	


Dimensions:

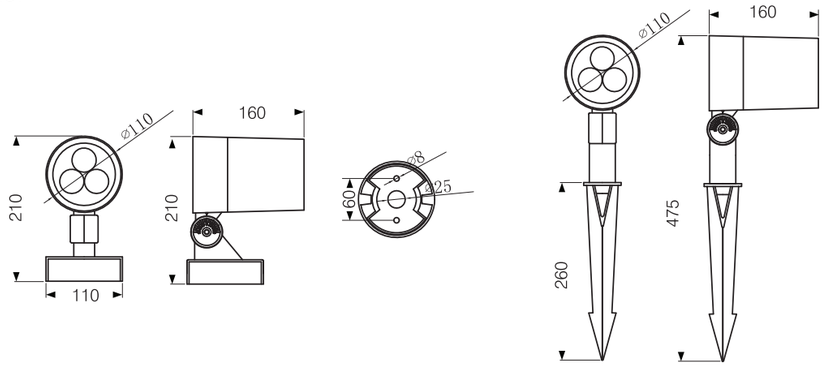

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	GD85-07LD	GD85-10LD	GD85-12LD
Power:	7W	10W	12W
Beam angle:		24°/ 38°/ 60°	
Dimensions:			

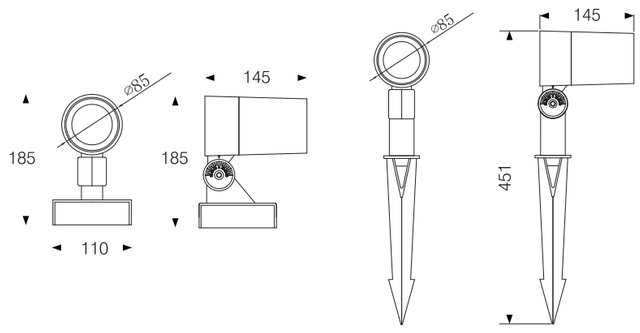


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	GD170-40LD	GD170-50LD
Power:	40W	50W
Beam angle:	24°/ 25°/ 38°/ 60°	
Dimensions:		

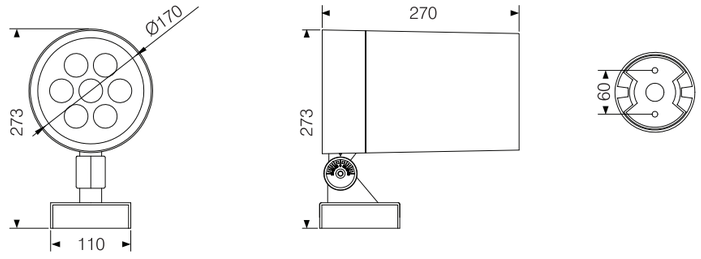


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB./ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



Model:	RF5010
Power:	10W
Beam angle:	5,5°/ 12°/ 20°/ 30°/ 10X70°/ 5X20°
Dimensions:	

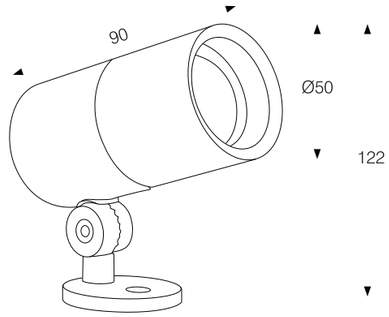


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb






Model:	GD2603	GD5006
Power:	3W	6W
Beam angle:	5,5°/ 12°/ 20°/ 30°/ 10X70°/ 5X20°	
Dimensions:		

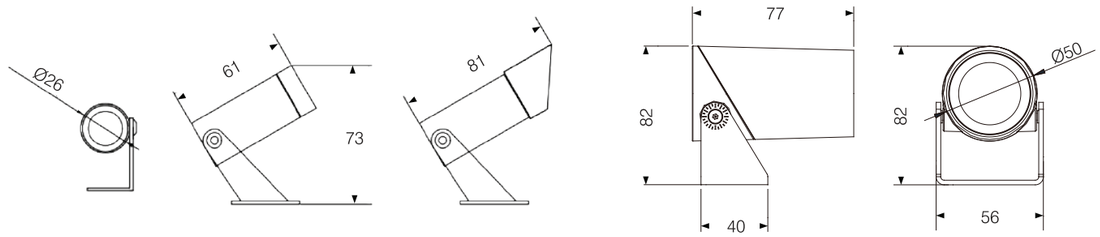


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Phase dimming, CC
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb




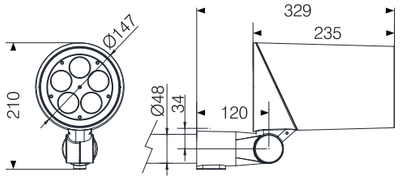

























Model:	GD147-45SL	GD147-50SL
Power:	45W	50W
Beam angle:	2,5°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°	

Dimensions:

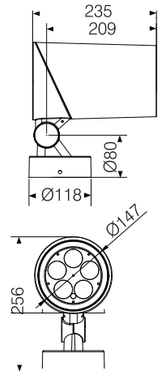

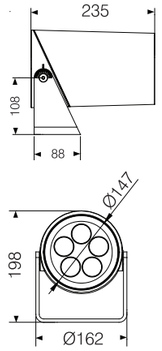





General specifications

LED:	Osram/ Cree
CRI(Ra):	＞80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGGBW
IP rating:	66
Lifetime:	＞50.000h
Control:	On/ Off, Dali, 0-10V, Phase dimming, CC, DMX512
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Hood, Spike, Honeycomb



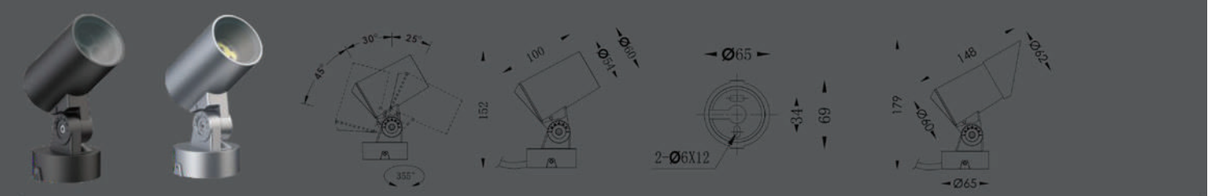

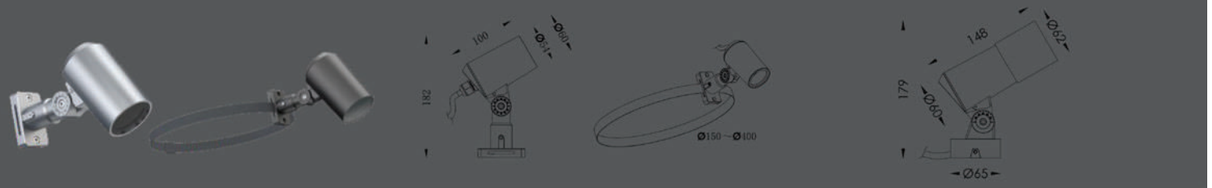










Model:	GD5404-01AL	GD5406-03AL	GD5406-01AL	GD5409-03AL	GD5412-03AL
Power::	4W	3x2W	6W	3x3W	3x4W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°	25°/ 40°/ 60°

Dimensions:










General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	Triac/ PWM/ 0-10V/ Dali/ DMX512
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C
Ancessory	Filter, Honeycomb




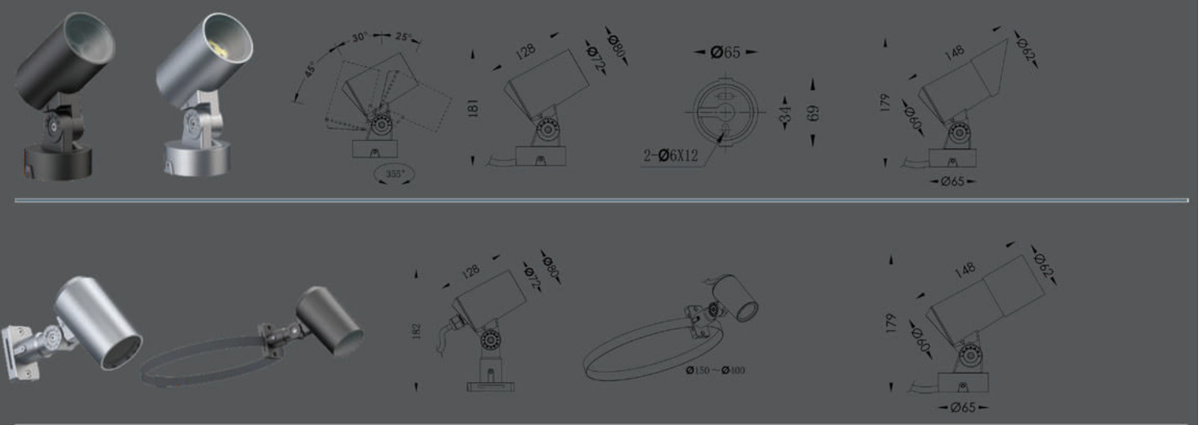



Model:	GD7210-01AL	GD7212-04AL	GD7212-01AL	GD7216-04AL
Power::	10W	4x3W	12W	4x4W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°

Dimensions:

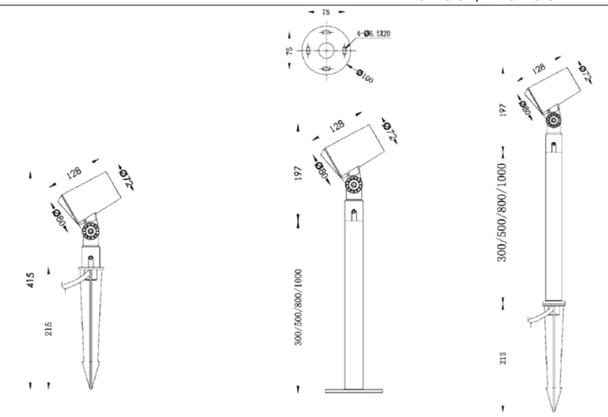



General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Filter, Honeycomb





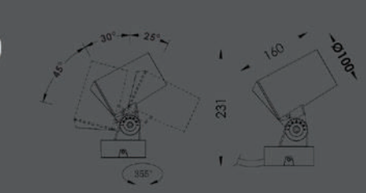




















Model:	GD10018-03AL	GD10024-06AL	GD10020-01AL
Power::	3x6W	6x4W	20W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	20°/ 25°/ 40°/ 60° 10x60°/ 20x30°
Dimensions:			



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C
Ancessory	Filter, Honeycomb




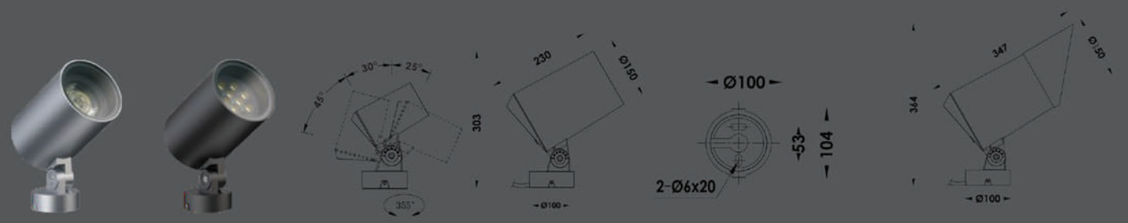





Model:	GD15042-06AL	GD15036-12AL	GD15040-01AL
Power::	6x7W	12x3W	40W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	25°/ 40°/ 60° 10x60°/ 20x30°
Dimensions:			

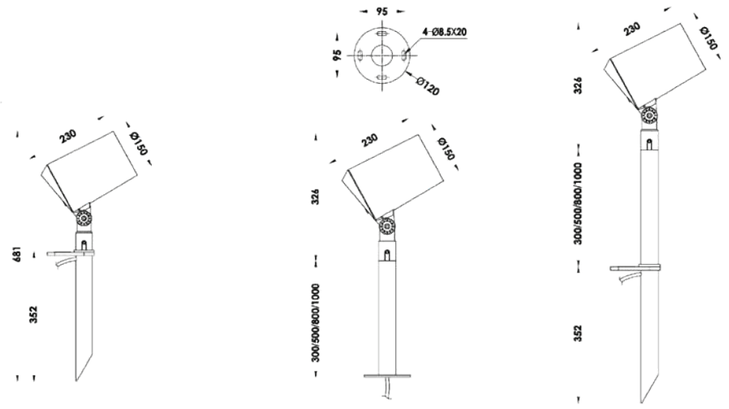

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+40°C
Ancessory	Filter, Honeycomb






SALADIN

Model:	R12001
Power:	10W
Beam angle:	180°

Dimensions:



General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Phase dimming, CC
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C



SALADIN

Model:	R120360
Power:	10W
Beam angle:	360°

Dimensions:



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Phase dimming, CC
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C






SALADIN

Model:	R12002
Power:	10W
Beam angle:	2x60°

Dimensions:



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C

SALADIN








Model:	R10212-A	R10212-B	R10212-C
Power:	12W	12W	12W
Beam angle:	360°	360°	360°

Dimensions:

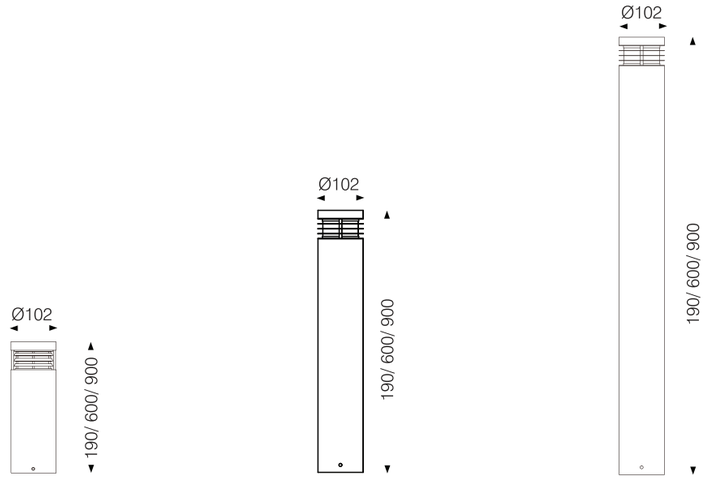

General specifications

LED:	SMD
CRI(Ra):	>80
Material:	Stainless steel body. Frost acrylic/ Clean acrylic
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	54
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C


SALADIN





Model:	R18524-A	R18524-B
Power:	24W	24W
Beam angle:	360°	360°

Dimensions:

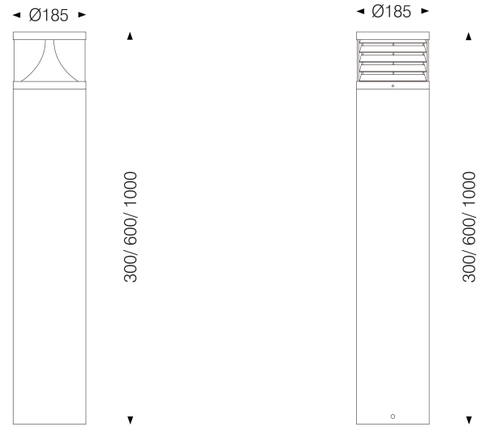

General specifications

LED:	SMD
CRI(Ra):	>80
Material:	Aluminum body. Clear glass
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C








MUSHROOM

Model:	M12013-A	M12013-B
Power:	13W	13W

Dimensions:

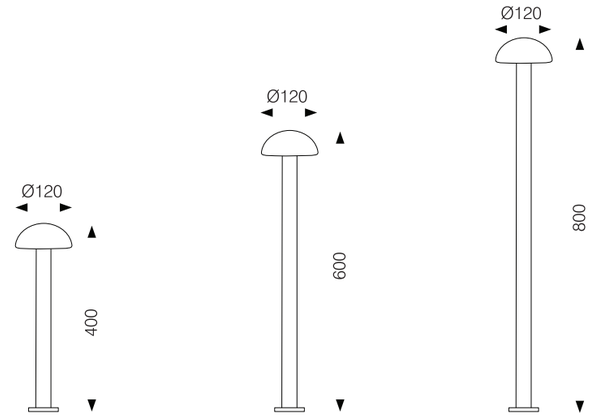


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	W3001A	W3002A
Power:	1W	2W
Beam angle:	10°/ 15°/ 20°/ 30°/ 50°	
Dimensions:		

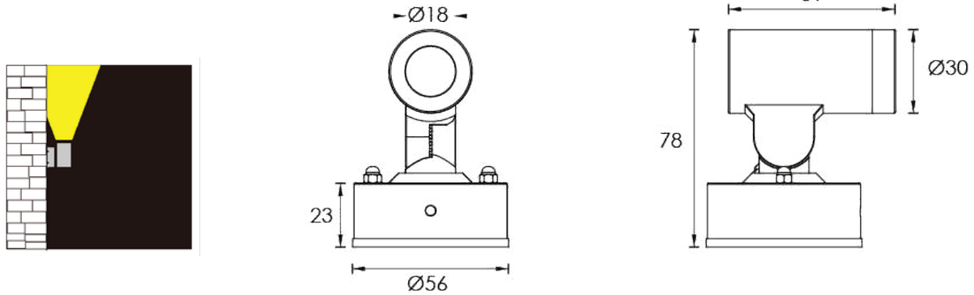


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	W3002B	W3004B
Power:	2x1W	2x2W
Beam angle:	10°/ 15°/ 20°/ 30°/ 50°	
Dimensions:		

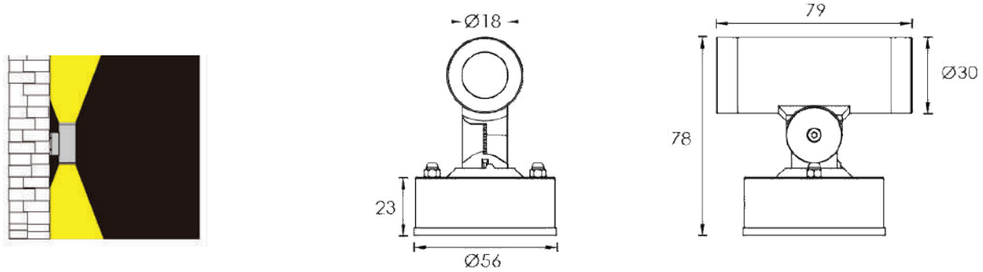

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C








Model:	FW17506-01	FW17510-02	RW13506-02
Power:	6W	2x5W	2x3W
Beam angle:	120°	120°	Adjustable 120°

Dimensions:

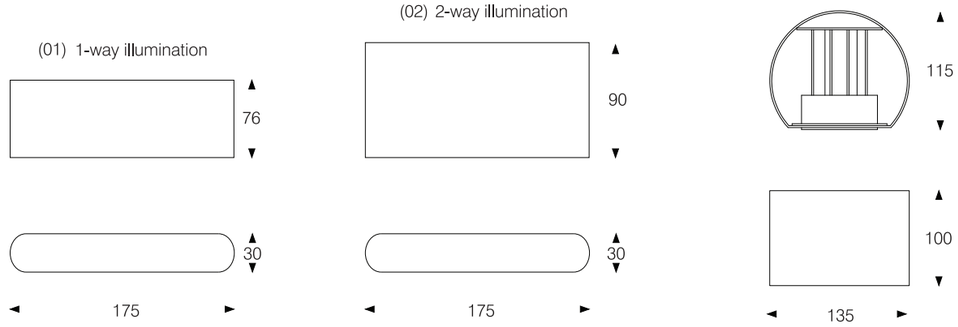

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C





Model:	AW6509A
Power:	9W
Beam angle:	8°/ 12°/ 24°/ 30°/ 45°

Dimensions:



General specifications


LED:	Bridgelux/ Cree
CRI(Ra):	>90
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb





Model:	AW6018B	AW11330B
Power:	2x9W	2x15W
Beam angle:	24°/ 38°/ 60°	

Dimensions:

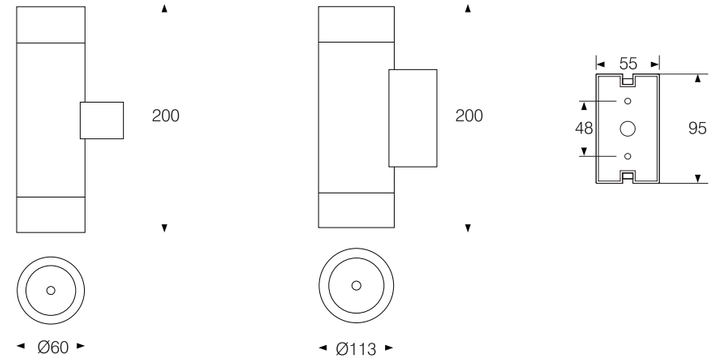

General specifications


LED:	Bridgelux/ Cree
CRI(Ra):	>90
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C～+50°C
Ancessory	Honeycomb





Model:	AW120-05AL	AW140-10AL	AW170-15AL	AW200-20AL
Power:	5W	10W	15W	20W
Beam angle:	15°/ 24°/ 36°/ 60°			

Dimensions:

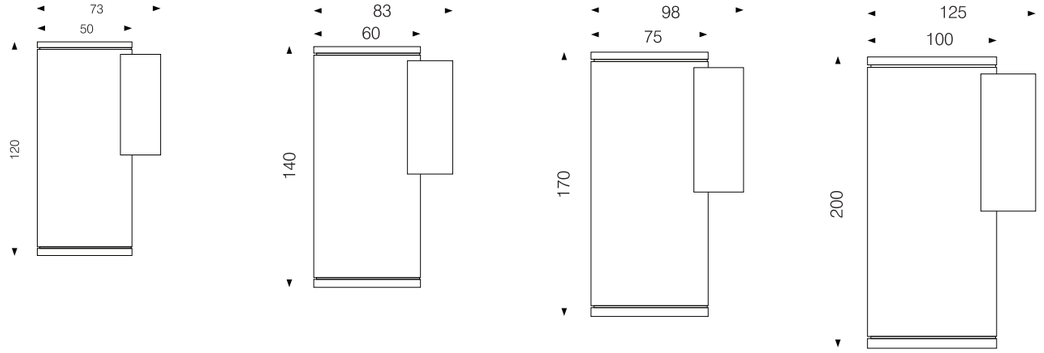


General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC12V/ DC24V
Operating temperature:	-20°C～+40°C





Model:	AW160-08AL	AW180-18AL	AW240-28AL	AW280-38AL
Power:	2x4W	2x9W	2x14W	2x19W
Beam angle:	15°/ 24°/ 36°/ 60°			


Dimensions:

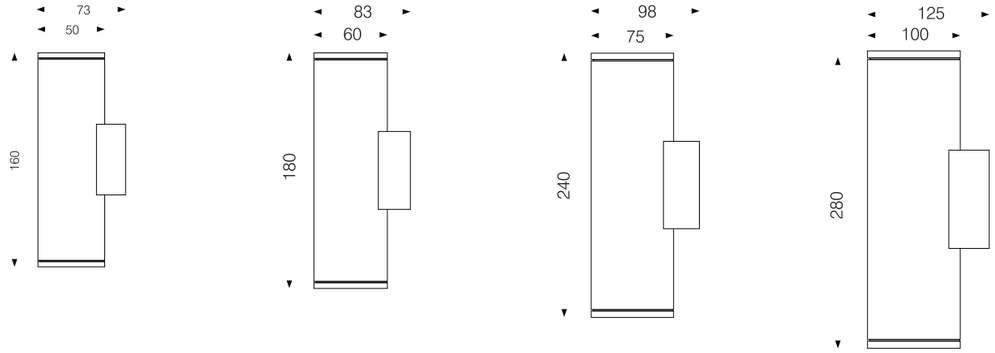

General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC85V-265V/ DC12V/ DC24V
Operating temperature:	-20°C～+40°C



Model:	WD280-36SL
Power:	36W
Beam angle:	2x120°
Dimensions:	

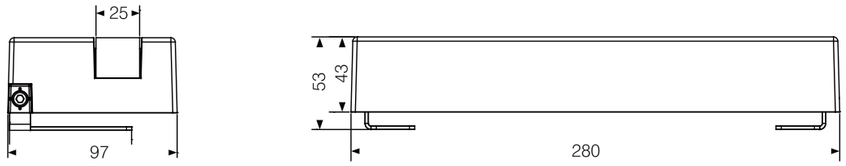


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	WD165-20SL
Power:	20W
Beam angle:	8x120°
Dimensions:	

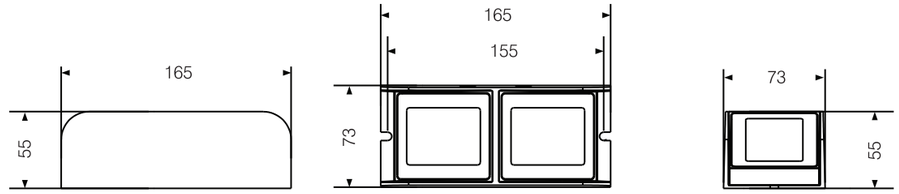


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C～+50°C




Model:	WD110-03LT
Power:	3W
Beam angle:	2x120°
Dimensions:	

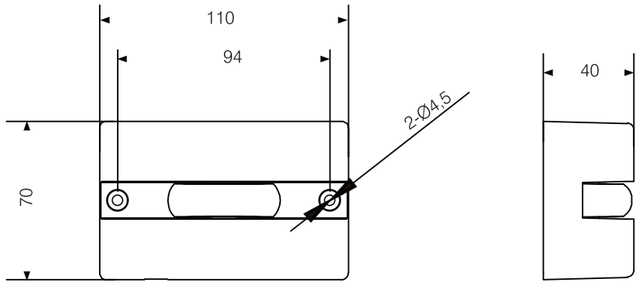


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/3000K/4000K/6500K//Pc Amber/RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C～+50°C

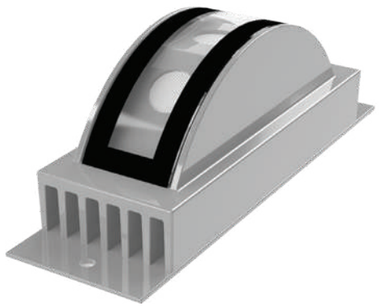

Model:	WD160-06LT
Power:	6W
Beam angle:	180°
Dimensions:	

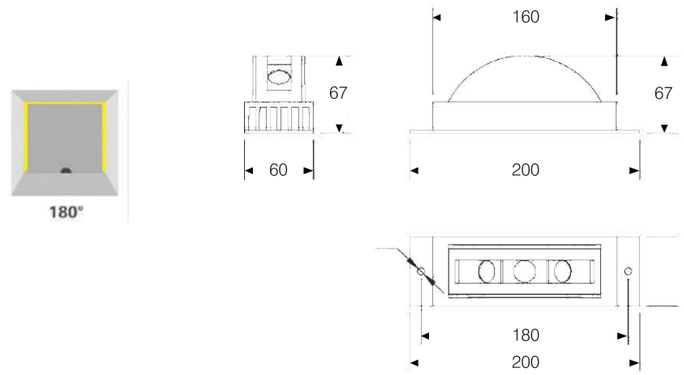


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C～+50°C




Model:	WD100-06LT
Power:	6W
Beam angle:	180°/ 360°
Dimensions:	

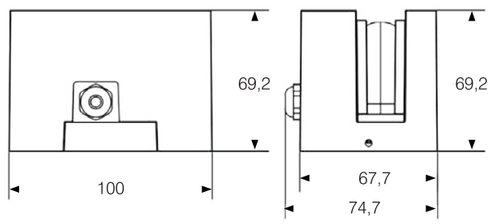


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C～+50°C



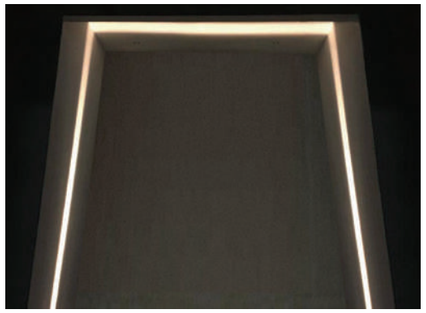


Model:	WD1001-07RL
Power:	7W
Beam angle:	3x180°
Dimensions:	

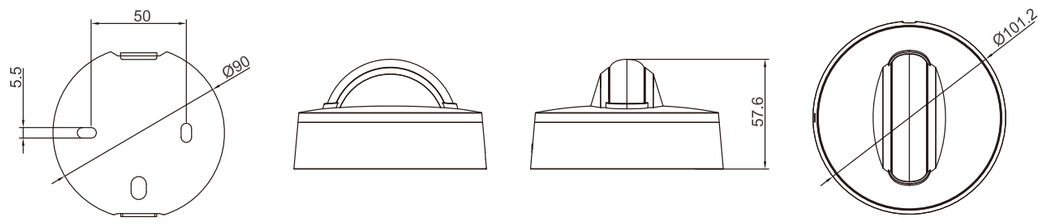


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	DC12V/ DC24V
Operating temperature:	-30°C～+45°C

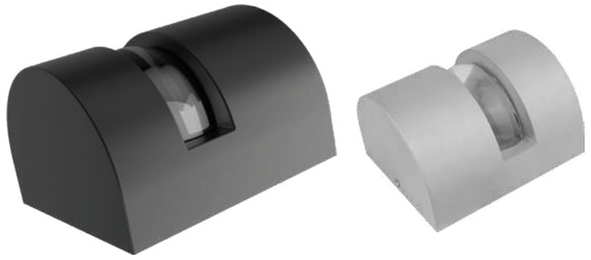

Model:	WD62-03LT	WD62-03LT	WD130-12LT
Power:	3W	6W	12W
Beam angle:		180°	
Dimensions:			

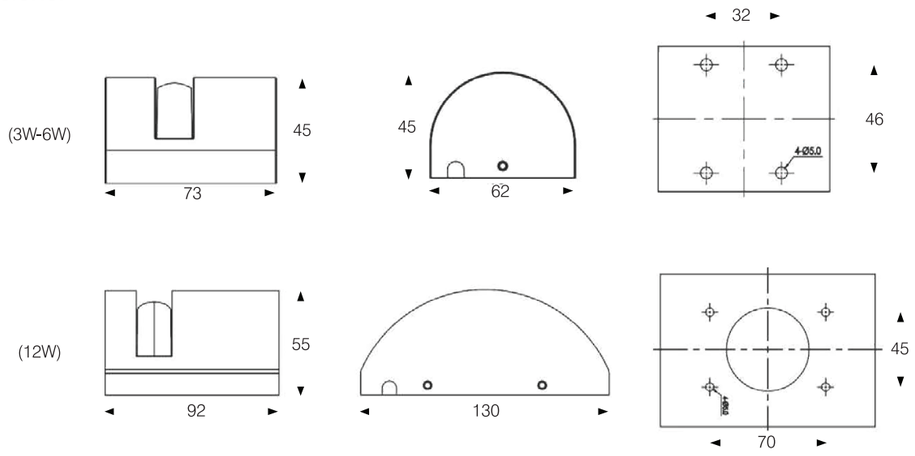


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Die-cast Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	WD148-07LT
Power:	7W
Beam angle:	180°
Dimensions:	

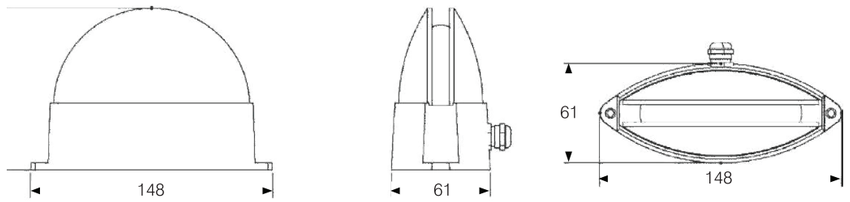



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	WD108-07LT
Power:	7W
Beam angle:	360°
Dimensions:	



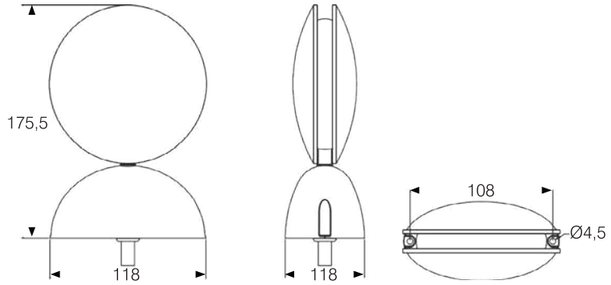



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	WD85-06LT
Power:	6W
Beam angle:	180°
Dimensions:	



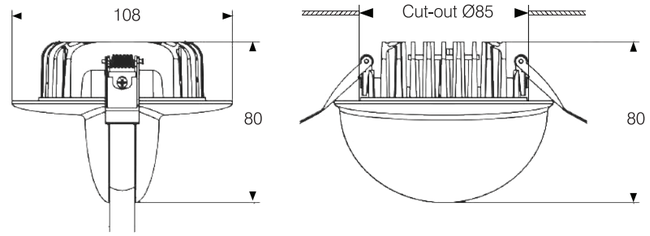


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C～+50°C





Model:	WD129-04SL	WD129-08SL	WD129-12SL
Power:	4W	8W	12W
Beam angle:		2°/ 20°/ 30°/ 60°	
Dimensions:			

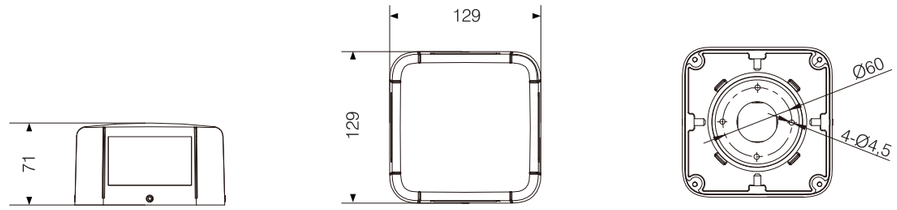


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C～+50°C





Model:	PX24-01SL
Power:	1W
Beam angle:	120°
Dimensions:	

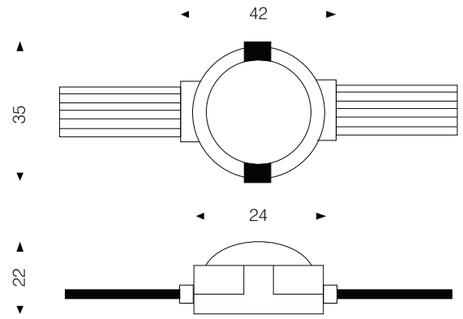


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	PX52-02SL
Power:	1,8W
Beam angle:	120°
Dimensions:	

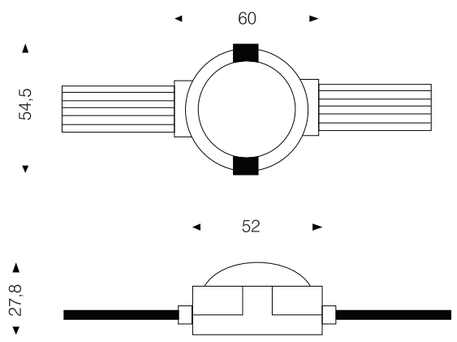


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	PX52-03SL
Power:	3W
Beam angle:	120°
Dimensions:	

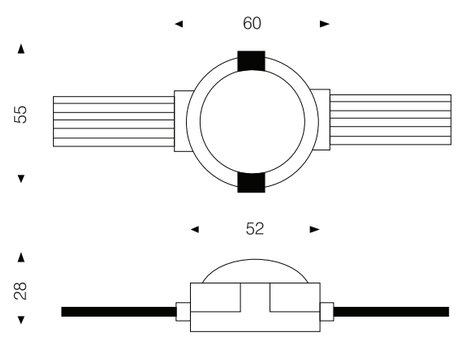


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C



Model:	PX90-03LD	PX90-06LD
Power:	3W	6W
Beam angle:	>120°	>120°
Dimensions:		

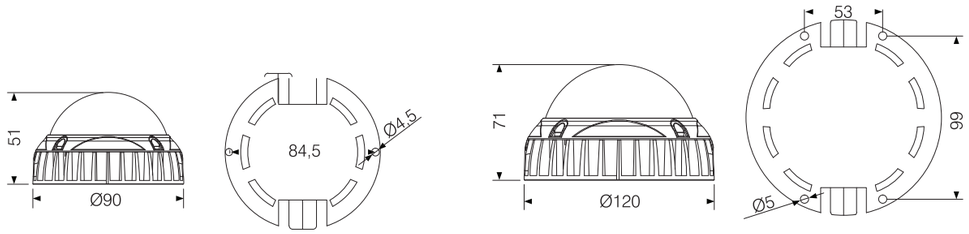



General specifications	
LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C







Model:	PX110-3.5SL	PX110-06SL	PX60-02SL	PX60-03SL
Power:	3,5W	6W	2W	3W
Beam angle:	≥120°			
Dimensions:				










General specifications

LED:	Osram/ Cree
CRI(Ra):	＞80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65/ 66
Lifetime:	＞50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C




Model:	PX150-08EXC
Power:	8W
Beam angle:	≥105°
Dimensions:	

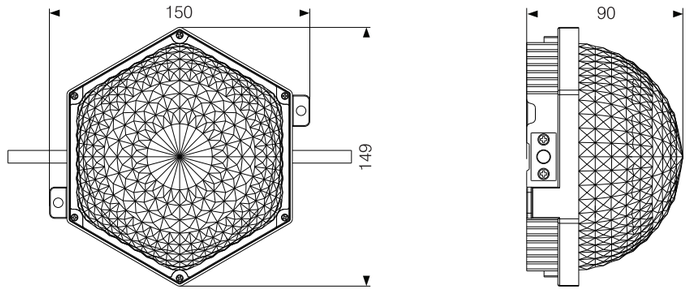


General specifications

LED:	SMD
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C

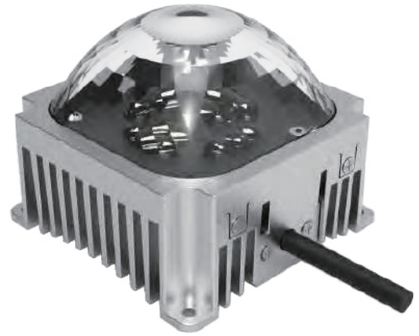

Model:	PX97-15EXC
Power:	15W
Beam angle:	≥120°
Dimensions:	

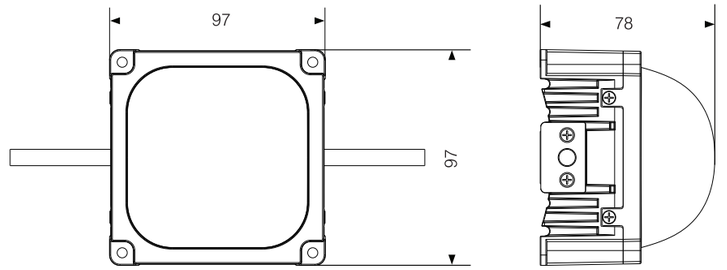

General specifications


LED:	SMD
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C～+50°C




Model:	LT24-12RL
Power:	15W
Beam angle:	120°

Dimensions:

Flat Bracket Size:1000x24x54.4mm(L*W*H) Net Weight:0.6kg
L=1000/500/300mm

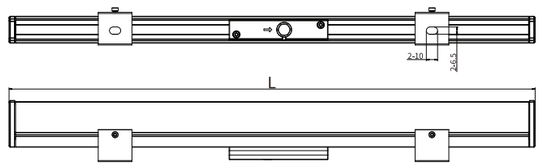

Clip bracket Size:1000x24x54.4mm(L*W*H) Net Weight:0.6kg
L=1000/500/300mm

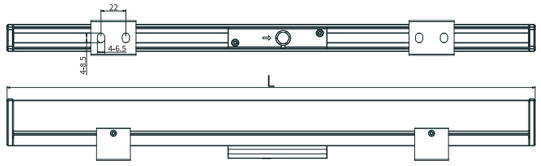

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali…
Voltage:	DC24V/ DC48V
Operating temperature:	-20°C～+45°C



Model:	LT33-15RL
Power:	15W
Beam angle:	120°

Dimensions:


Rotate bracket Size:1000x32.5x74.7mm(L*W*H) Net Weight:0.7kg
L=1000/500/300mm

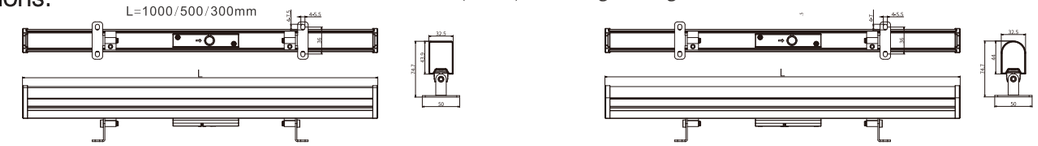

Flat Bracket Size:1000x32.5x56.6mm(L*W*H) Net Weight:0.7kg
L=1000/500/300mm



Clip bracket Size:1000x32.5x56.6mm(L*W*H) Net Weight:0.7kg
L=1000/500/300mm

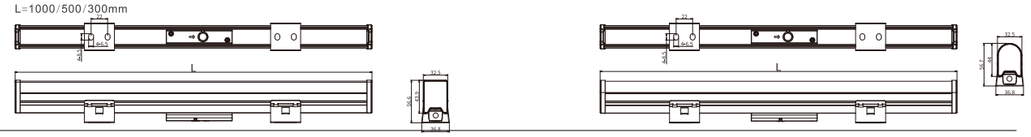


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V/ DC48V
Operating temperature:	-20°C～+45°C



Model:	LT48-12RL	LT48-15RL
Power:	12W	15W
Beam angle:	120°	

Dimensions:

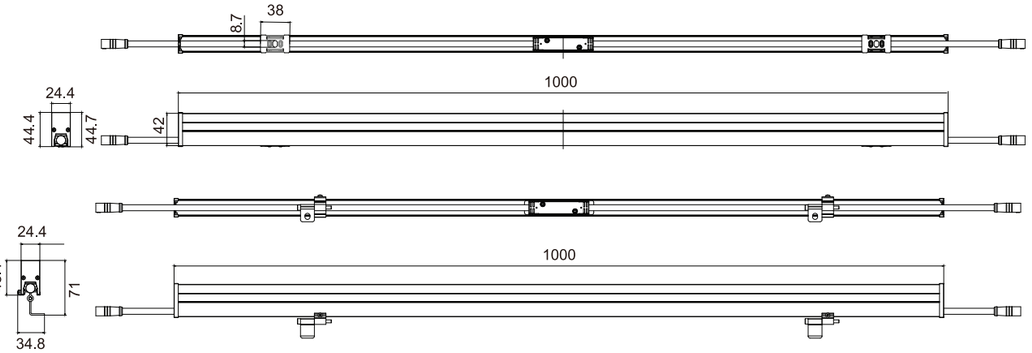

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-40°C～+50°C



Model:	LT48B-12RL
Power:	12W
Beam angle:	120°

Dimensions:

L=1000/ 500/ 300mm

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V/ DC48V
Operating temperature:	-40°C～+50°C


LED TUBE



Model:	LT50-12LD
Power:	12W
Beam angle:	120°

Dimensions:

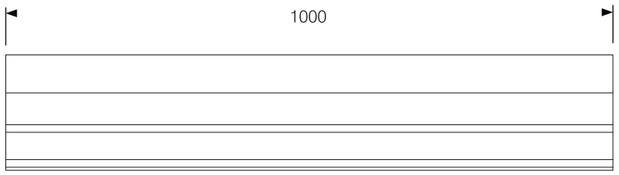




General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C



Model:	LT31-12LD
Power:	12W
Beam angle:	120°

Dimensions:

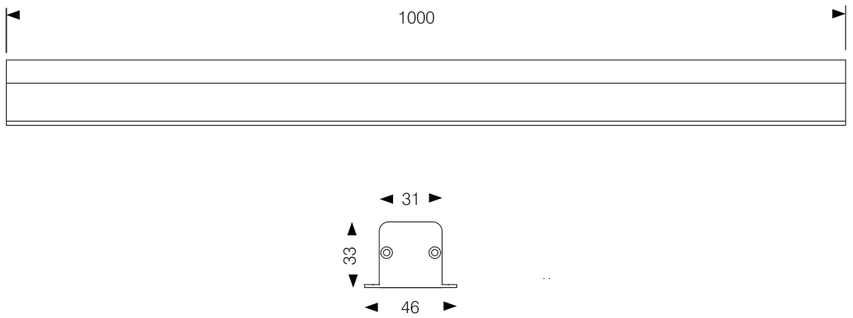


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C



Model:	LT31-15LD
Power:	15W
Beam angle:	120°

Dimensions:

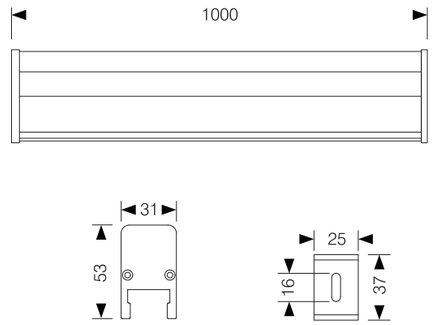

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512…
Voltage:	DC24V
Operating temperature:	-20°C～+50°C



Product Introduction

H803TC can work with PC (online), SD card (offline) or DMX console. H804TC up to 170000 pixels, 2 ports control up to 255 sub-controller.

Specification

No		Parameter
01	Product name	LED intelligent master controller
02	Item N0	H803TC
03	Dimension	270(L) x 150(W) x 45(H) mm
04	Input voltage	AC220V
05	Power: consumption	2W
06	Output port	2 ports control maximum 255 slave Controller
07	Control pixel	170000 pixels
08	SD card supports	FAT32, FAT16 format, maximum capcity is 64GB, stores up to 64 DAT files
09	Features	• H803TC can work with PC (online), SD card (offline) or DMX console. • Slave contronller is H802RA, you can set address for DMX512 chips. • By combining H803TTC with H802RA, you can set address for DMX512 chips. • H803TC transmission distance from H803TC to slave controller is 100 meters. • Use four buttons to switch files, set play mode, speed and brightness. • Supports Encryption of Power:-up times.



Product Introduction

H807SA has eight-port output single controller that can be online and can be offline, and can control up to 8192 pixels.
Support Art-Net protocol,DMX chip address, can connect to DMX console and add or delete DAT files through LAN.

Specification

No		Parameter
01	Product name	LED intelligent master controller
02	Item N0	H807SA
03	Dimension	233(L) x 140(W) x 45(H) mm
04	Input voltage	AC220V
05	Power: consumption	2W
06	Output port	TM1812 and simultaneous chips can output 16 ports.
07	Control pixel	Eight output ports, control up to 8192 pixels. Each port can control up to 1024 points.
08	SD card supports	FAT32, FAT16 format, maximum capcity is 64GB, stores up to 64 DAT files
09	Features	• It can be control led by LAN synchronously, and can switch files by sending UDP commands to network port 2, or obtain the serial number of the currently playing file. • Can be connected to DMX console, supports RGBW, can replace files, adjust speed and brightness, and respond quickly. • Support Art-Net protocol, can use MADRIX, jinx and other software supporting Artnet directly. Supports the encryption function of limiting the number of times of Power:-on. • Supports addressing of DMX chips, with built-in counting and internal control testing functions. • Can be connected and disconnected, can be directly connected to the computer network card, router, can also be connected to the main controller. • Support online firmware upgrade. • Set Sculpt of DAT to support DAT files of different shapes.



Product Introduction

BP-D2120K is a large-scale online master controller, cooperates with slave controler - BP - D2120K in application. BP-D2120K is access to road 0.12 million pixels with SD card storage and the remote control, which can implement function, such as the off-line timing play, play fragment selection, overall brightness adjustment, built-in animation test program, RGBW four-color fixture lighting control and etc. SL-D2120K is the combination of DMX512 and SPI serial control (can not be selected simultaneously), which immensely meets the various demand from customers during the application and debugging.

Main performance

1. Adopt the large volume of 8GB SD card to store data with various programs.
2. Own LCD English display interface with features of easy operation intuitive.
3. By receiving BTS base station signal to reach the wireless linkage synchronization of multiple Controller, meeting the clients requirements to synchronize multiple Controller when there is no connecrion between multiple building.
4. Based on Android platform and SIM communication to send remote control instructions, to control SL-B2120K program segment speed and brightness adjustment etc function
5. Ofter various controller methods, sush as DMX512 and SPI, SL-D2120K is access to load 0,12 million pixels when cooperated with slave controller, it is especially applied to large-scale projects.

Specification

No		Parameter
01	Product name	LED intelligent master controller
02	Item N0	BP-D2120K
03	Dimension	236(L) x 135(W) x 45(H) mm
04	Driver	AC220V 50Hz
05	Rated Power:	15W
06	Control pixel	0.12 million pixels
07	Control effect	Word, animation, images, video
08	SD card volume	8GB
09	Communication interface	RJ-45
10	Program quantity	≤80 units
11	Speed grade	100 grade
12	Brightness adjustment grade	100 grade
13	Protection grade	IP20
14	Fixed hole interval	75mm, 218.4mm
15	Application	Outdoor and indoor led lighting project



Product Introduction

The BP-G2120K is a offline master Controller, cooperates with slave controller-BP-D3200 in application, to form a linkage offline system. By receiving satallite signals to reach global sunchronization among multiple Controller. To meet the need for customers to sunchronize multiple Controller in a situation where multiple buildings cannot be connected.

Main performance

1. The maximim access to load 0,12 million pixels.
2. The System supports automatic, timing, holiday modes.
3. The Controller with extrernal buttons remote control, which can implement function, such as single machine timing play, play fragment selection, overall brightness adjustment, the white balance adjustment, play speed adjustment.
4. Adopt the large volume of 8GB SD card to store data with various programs.
5. Supports switch parallel scheme: Reduce system cascade chain length to improve stability.
6. Supports double-channel backup. It will not be affected if one controller is bad or the network line is broken.

Specification

No		Parameter
01	Item No	Satellite Synchronous Offline controller
02	Item N0	BP-GK2120K
03	Dimension	236(L) x 135(W) x 45(H) mm
04	Driver	AC100~240V 60/ 50Hz
05	Rated Power:	15W
06	Control pixel	0.12 million pixels
07	Control effect	Word, animation, images, video
08	SD card volume	8GB
09	Communication interface	RJ-45
10	Clock type	≤80 units
11	Speed grade	100 grade
12	Brightness adjustment grade	100 grade
13	Protection grade	IP20
14	Fixed hole interval	75mm, 218.4mm
15	Application	Outdoor and indoor led lighting project



Product Introduction

BP-D100 is a DMX signal amplifier with the function of signal isolation. The housing adopts ABS material with high intensity and profound corrosion resistance, Own small Power: consumption, excellent shielding effectiveness, Power:ful anti-jamming capability, strong stability. Degree of protection IP65.

Specification

No		Parameter
01	Product name	DMX signal isolated amplifier
02	Item N0	BP-D100
03	Dimension	122(L) x 55(W) x 38(H) mm
04	Driver	DC6～36V/AC100-240V
05	Power: consumption	≤2W
06	Isolate voltage	1000V
07	Communication interface	DMX512
08	Transmission speed	≤1 Mbps
09	Addressing mode	Support automatic addressing
10	Protection grade	IP65
11	Master control	SL-D8000, SL-D2000, SL-D3000 or DMX512 Console
12	Fixed hole interval	110mm
13	Application	Outdoor and indoor led lighting project or stage lighting project